

ELMARK HOLDING SE United Kingdom



CATALOGUE 2020



ELMARK®
The Brand of Electricity


ELMARK®

MOBILE APP



Buy online!

- ▶ *Be ahead of competition*
- ▶ *Easy and efficient ordering*
- ▶ *Better Customer Service*
- ▶ *Choice and Flexibility*

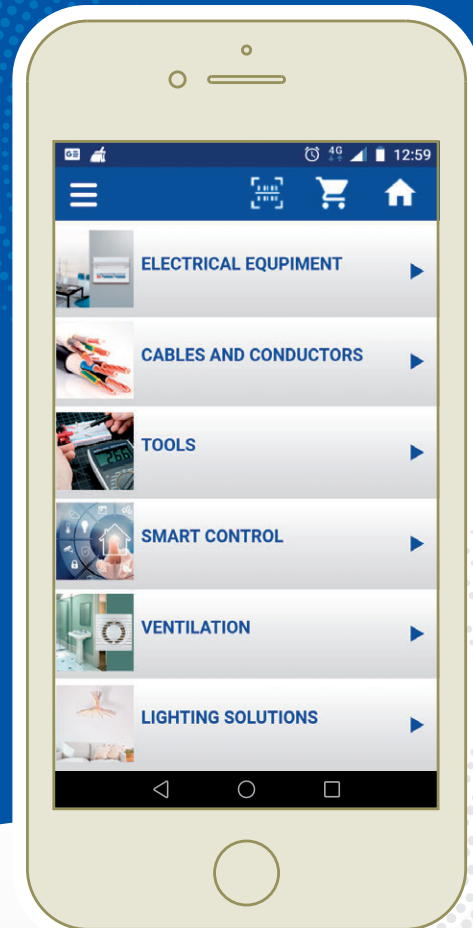

***ENJOY ALL ELMARK E-BUSINESS PLATFORM
FEATURES ON THE GO***

Install Application!



Scan the QR code or visit any app store to download ELMARK App


www.elmarkholding.eu



ELINOR
TABLE & FLOOR LAMPS
PAGE 672



LUKE
TABLE & FLOOR LAMPS
PAGE 673



MICKEY BLUE
SPOTLIGHTS
PAGE 677



MICKEY WHITE
SPOTLIGHTS
PAGE 679



JIM
SPOTLIGHTS
PAGE 690



JACK
SPOTLIGHTS
PAGE 691



PICASSO
SPOTLIGHTS
PAGE 697

INDOOR LIGHTING



TETRAGON IP20
LED PANELS
PAGE 669



TETRAGON IP44
LED PANELS
PAGE 700



LED PANEL ROUND IP20
LED PANELS
PAGE 702



LED PANEL ROUND IP44
LED PANELS
PAGE 706



WATERPROOF ROUND
LED PANELS
PAGE 707



SUPER SLIM WITH CLIPS
LED PANELS
PAGE 708



LED PANEL ROUND OM
LED PANELS
PAGE 709



COLOUR TEMP. ADJUSTABLE
LED PANELS
PAGE 712



INDIRECT DOWNLIGHTS
LED PANELS
PAGE 713



LED PANEL SQUARE
LED PANELS
PAGE 714



LED PANEL SQUARE OM
LED PANELS
PAGE 715



GLASS PANEL ROUND
LED PANELS
PAGE 717



RECESSED FIXTURE
LED FIXTURE
PAGE 718



IVOR
LED PANELS
PAGE 719



LUCE
LED FIXTURE
PAGE 721



MALIA
LED FIXTURE
PAGE 724



DONUT
LED FIXTURE
PAGE 725



TRACY SUPER SLIM
LED FIXTURE
PAGE 726



LED WALL LIGHT IP65
LED FIXTURE
PAGE 729



SENSOR CABINET LAMP
LED FIXTURE
PAGE 730



ELR627
DOWNLIGHT
PAGE 732



SA-045
DOWNLIGHT
PAGE 739



GYPSUM DOWNLIGHTS
DOWNLIGHT
PAGE 742



BOUTIQUES MINI
DOWNLIGHT
PAGE 744



SA-71
DOWNLIGHT
PAGE 745



DEEP RECESSED IP44
DOWNLIGHT
PAGE 755



DL-044 SQUARE
DOWNLIGHT
PAGE 762



SKY TLR
DOWNLIGHT
PAGE 764



FLCOM COB
DOWNLIGHT
PAGE 766



FRANCA 90
DOWNLIGHT
PAGE 768



FOUR POLES MAGNETIC
TRACK LIGHTING
PAGE 773



FOUR POLES MAGNETIC
TRACK LIGHTING
PAGE 775



FOUR POLES 48V TRACK
TRACK LIGHTING
PAGE 776



2/4 LINES SKY TLR
TRACK LIGHTING
PAGE 778



2/4 LINES SKY TFL
TRACK LIGHTING
PAGE 781



2/4 LINES CINEMA SKY
TRACK LIGHTING
PAGE 784



SKY FIXTURES TLBM
TRACK LIGHTING
PAGE 786



TRITON
LUMINAIRE
PAGE 791



LED MOD FIXTURE
LUMINAIRE
PAGE 793



ACOUSTIC HIGH POWER LED
LUMINAIRE
PAGE 797



ACOUSTIC LED RINGS
LUMINAIRES
PAGE 798



LED RINGS
LUMINAIRES
PAGE 799



LED PROFILES S48
LUMINAIRES
PAGE 801



LED PROFILES S77
LUMINAIRES
PAGE 806



RAINBOW LED SMD
LUMINAIRES
PAGE 807



LENA-V BM/
LUMINAIRES
PAGE 812



XL101
EMERGENCY LIGHTS
PAGE 826



XL3114
EMERGENCY LIGHTS
PAGE 828



TRITON
BATHROOM
PAGE 830



LED MIRROR LIGHT
BATHROOM
PAGE 831



LED PANEL ROUND IP44
BATHROOM
PAGE 834



WATERPROOF LED PANEL
BATHROOM
PAGE 835



ELR627
BATHROOM
PAGE 836


OUTDOOR LIGHTING



BELT LIGHT
GARDEN
PAGE 839



JOSH
GARDEN
PAGE 841

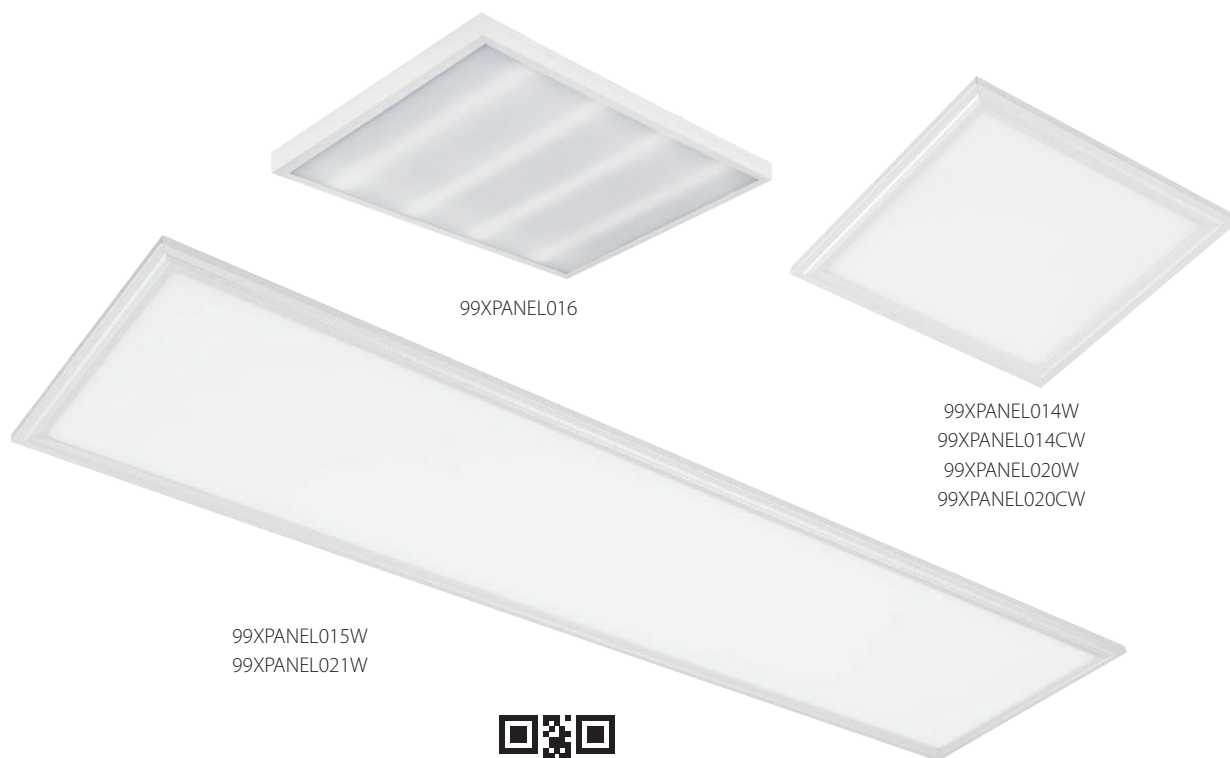

99XPANEL016

99XPANEL014W
99XPANEL014CW
99XPANEL020W
99XPANEL020CW

99XPANEL015W
99XPANEL021W



UNTIL SUPPLY
LAST

LED PANELS STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99XPANEL014W		F	40	3600	4000	white	595	595	30	1/5	A++A
99XPANEL014CW		F	40	3600	6400	white	595	595	30	5/5	A++A
99XPANEL015W		F	40	3600	4000	white	295	1195	30	1/5	A++A
99XPANEL016	-	F	36	2400	4000	white	595	595	19	1/2	A++A




LED PANELS STELLAR


Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99XPANEL020W	99XPANEL020WE	C	48	4320	4000	white	595	595	30	1/6	A++A
99XPANEL020CW	99XPANEL020CWE	C	48	4320	6400	white	595	595	30	1/6	A++A
99XPANEL021W	99XPANEL021WE	C	48	4320	4000	white	295	1195	30	1/6	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.



Panel frame for 595/595 mm ceiling mounting white
Catalogue number: **92FRAME020W**



Panel frame for 295/1195 mm ceiling mounting white
Catalogue number: **92FRAME021W**

*Suitable for surface and ceiling mounting. | **Body:** Iron+PS | 1YEAR WARRANTY

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings)

Body: aluminium | **Light source:** SMD 4014 | **Starting time:** < 0.5s | **Power factor:** 0.9 | Recessed mounted luminaire | **Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL IP44
WHITE FRAME COLOUR



LED PANEL IP44
ALUMINIUM FRAME COLOUR



LED PANEL IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Dimmable	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
92PANEL012WIP44	92PANEL012WIP44E	C	-	24	2400	4000	white	295	295	11	1/12	A++A
92PANEL013WIP44	92PANEL013WIP44E	C	-	36	3600	4000	white	595	295	11	1/6	A++A
92PANEL020WIP44	92PANEL020WIP44E	C	-	48	4800	4000	white	595	595	30	1/6	A++A
92PANEL020CWIP44	92PANEL020CWIP44E	C	-	48	4800	6400	white	595	595	30	1/6	A++A
92PANEL018WIP44	92PANEL018WIP44E	C	Yes	45	4500	4000	white	595	595	9	1/5	A++A
92PANEL014IP44	92PANEL014IP44E	C	-	48	4800	4000	aluminium	595	595	11	1/5	A++A
92PANEL021WIP44	92PANEL021WIP44E	C	-	48	4800	4000	white	1195	295	30	1/6	A++A



INSTALLATION ACCESSORIES FOR LED PANELS

Suspension wire for suspended mounting

Catalogue number: **99ACC18**

Clips for mounting on plasterboard

Catalogue number: **99ACC21**

Fasteners for surface mounting

Catalogue number: **99ACC22**



Emergency kit with a possibility for work in an emergency regime more than two hours.

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings)

Body: aluminium | **Light source:** Epistar SMD4014 | **Starting time:** <0.5s | **Power factor:** λ>0.9

LED panels can be dimmed using a suitable dimmable driver and remote control.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL
WHITE FRAME COLOUR



LED PANEL
ALUMINIUM FRAME COLOUR



NEUTRAL
WHITE
4000K

COOL
WHITE
6400K

IP40



LED PANEL

Catalogue number	Catalogue number with Emergency kit	Product category	Dimmable	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/ Box (pcs)	Energy class
92PANEL012W	92PANEL012WE	C	-	24	2400	4000	white	295	295	11	1/12	A++A
92PANEL012	-	F	-	24*	2400	4000	aluminium	295	295	11	1/12	A++A
92PANEL013W	92PANEL013WE	C	-	36	3600	4000	white	595	295	11	1/6	A++A
92PANEL013	-	F	-	36*	3600	4000	aluminium	595	295	11	1/6	A++A
92PANEL020W	92PANEL020WE	C	-	48	4800	4000	white	595	595	30	1/6	A++A
92PANEL014N	-	F	-	45*	4500	4000	aluminium	595	595	11	1/5	A++A
92PANEL018W	92PANEL018WE	C	Yes	45	4500	4000	white	595	595	9	1/5	A++A
92PANEL018	-	F	Yes	45*	4500	4000	aluminium	595	595	9	1/5	A++A
92PANEL014	92PANEL014E	C	-	48	4800	4000	aluminium	595	595	11	1/5	A++A
92PANEL020CW	92PANEL020CWE	C	-	48	4800	6400	white	595	595	30	1/6	A++A
92PANEL021W	92PANEL021WE	C	-	48	4800	4000	white	1195	295	30	1/6	A++A



INSTALLATION ACCESSORIES FOR LED PANELS

Suspension wire for suspended mounting


Catalogue number: **99ACC18**

Clips for mounting on plasterboard

Catalogue number: **99ACC21**

Fasteners for surface mounting

Catalogue number: **99ACC22**



Panel frame for 595/595 mm ceiling mounting white
Catalogue number: **92FRAME020W**

Panel frame for 295/1195 mm ceiling mounting white
Catalogue number: **92FRAME021W**

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings). 99ACC21 and 99ACC22 are suitable only for LED panels with height 9-11mm

Body: aluminium | **Light source:** Epistar SMD4014 | **Starting time:** <0.5s | **Power factor:** λ>0.9 | *Until Supply Last | LED panels can be dimmed using a suitable dimmable driver and remote control.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND

99XLED621
99XLED620
99XLED620CW



LED PANEL ROUND

99XLED615
99XLED614
99XLED614CW



LED PANEL ROUND

99XLED612
99XLED611
99XLED611CW



LED PANEL ROUND

99XLED610
99XLED609
99XLED609CW



LED PANELS ROUND STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
99XLED610	99XLED610E	C	6	330	2700	white	120	18	103	1/30	A++A
99XLED609	99XLED609E	C	6	330	4000	white	120	18	103	1/30	A++A
99XLED609CW	99XLED609CWE	C	6	330	6500	white	120	18	103	1/30	A++A
99XLED612	99XLED612E	C	12	840	2700	white	170	18	152	1/24	A++A
99XLED611	99XLED611E	C	12	840	4000	white	170	18	152	1/24	A++A
99XLED611CW	99XLED611CWE	C	12	840	6500	white	170	18	152	1/24	A++A
99XLED615	99XLED615E	C	18	1350	2700	white	225	18	205	1/20	A++A
99XLED614	99XLED614E	C	18	1350	4000	white	225	18	205	1/20	A++A
99XLED614CW	99XLED614CWE	C	18	1350	6500	white	225	18	205	1/20	A++A
99XLED621	99XLED621E	C	24	1800	2700	white	295	18	268	1/24	A++A
99XLED620	99XLED620E	C	24	1800	4000	white	295	18	268	1/24	A++A
99XLED620CW	99XLED620CWE	C	24	1800	6500	white	295	18	268	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | Body: aluminium | Light source: SMD 2835 | Starting time: < 0.5s | Power factor: 0.55 | Recessed mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND

LED PANEL ROUND
DIMMABLEWARM
WHITE
2700KNEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP40



LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Dimmable	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
99LED971	99LED971E	C		6	350	4000	white	118	17	103	1/50	A++A
99LED971WW	99LED971WWE	C		6	350	2700	white	118	17	103	1/50	A++A
99LED971CW	99LED971CWE	C		6	350	6400	white	118	17	103	1/50	A++A
99LED972	99LED972E	C		12	890	4000	white	166	18	151	1/30	A++A
99LED972WW	99LED972WWE	C		12	890	2700	white	166	18	151	1/30	A++A
99LED972CW	99LED972CWE	C		12	890	6400	white	166	18	151	1/30	A++A
99LED973	99LED973E	C		18	1420	4000	white	225	18	205	1/20	A++A
99LED973WW	99LED973WWE	C		18	1420	2700	white	225	18	205	1/20	A++A
99LED973CW	99LED973CWE	C		18	1420	6400	white	225	18	205	1/20	A++A
99LED617D	99LED617DE	C	Yes	21	1680	4000	white	225	21	205	1/20	A++A
99LED974	99LED974E	C		24	1900	4000	white	296	13	275	1/20	A++A
99LED974WW	99LED974WWE	C		24	1900	2700	white	296	13	275	1/20	A++A
99LED974CW	99LED974CWE	C		24	1900	6400	white	296	13	275	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | Body: aluminium | Reflector: polycarbonate (pc) | Light source: Epistar SMD2835 | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND

99LED621T
99LED620TCW
99LED618T



LED PANEL ROUND

99LED612T

LED PANEL ROUND

704

LED PANELS



IP40



UNTIL SUPPLY
LAST

LED PANEL ROUND

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED612T	F	9	720	2700-3000	white	142	24	132	1/50	A++A
99LED618T	F	18	1440	2700-3000	white	225	24	207	1/20	A++A
99LED621T	F	24	1920	2700-3000	white	297	24	277	1/20	A++A
99LED620TCW	F	24	1920	6000-6400	white	297	24	277	1/20	A++A

Body: aluminium | Reflector: polycarbonate (pc) | Light source: Epistar SMD2835 | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



3+0
standard
+extended

3

YEAR TOTAL
WARRANTY



LED PANEL ECO

99LED962CW
99LED962
99LED962WW
99LED963CW
99LED963
99LED963WW
99LED964CW
99LED964
99LED964WW



LED PANEL ECO

99LED960CW
99LED960
99LED960WW
99LED961CW
99LED961
99LED961WW



IP40



LED PANEL ROUND ECO SERIES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED960CW	C	6	510	6000-6400	white	100	25	77	1/100	A++A
99LED960	C	6	510	4000-4300	white	100	25	77	1/100	A++A
99LED960WW	C	6	510	2700-3000	white	100	25	77	1/100	A++A
99LED961CW	C	12	1020	6000-6400	white	141	25	117	1/60	A++A
99LED961	C	12	1020	4000-4300	white	141	25	117	1/60	A++A
99LED961WW	C	12	1020	2700-3000	white	141	25	117	1/60	A++A
99LED962CW	C	18	1530	6000-6400	white	168	25	143	1/60	A++A
99LED962	C	18	1530	4000-4300	white	168	25	143	1/60	A++A
99LED962WW	C	18	1530	2700-3000	white	168	25	143	1/60	A++A
99LED963CW	C	24	2040	6000-6400	white	200	25	168	1/30	A++A
99LED963	C	24	2040	4000-4300	white	200	25	168	1/30	A++A
99LED963WW	C	24	2040	2700-3000	white	200	25	168	1/30	A++A
99LED964CW	C	28	2500	6000-6400	white	220	25	190	1/20	A++A
99LED964	C	28	2500	4000-4300	white	220	25	190	1/20	A++A
99LED964WW	C	28	2500	2700-3000	white	220	25	190	1/20	A++A

Body: PC | Reflector: polycarbonate (pc) | Light source: Epistar SMD2835 | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND IP44

99LED609IP44
99LED609IP44CW



LED PANEL ROUND IP44

99LED611IP44
99LED611IP44CW



LED PANEL ROUND IP44

99LED617IP44
99LED617IP44CW



LED PANEL ROUND IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP44	99LED609IP44E	C	5	400	4000	white	90	21	40	A++A
99LED609IP44CW	99LED609IP44CWE	C	5	400	6500	white	90	21	40	A++A
99LED611IP44	99LED611IP44E	C	12	960	4000	white	175	21	20	A++A
99LED611IP44CW	99LED611IP44CWE	C	12	960	6500	white	175	21	20	A++A
99LED617IP44	99LED617IP44E	C	18	1440	4000	white	225	21	20	A++A
99LED617IP44CW	99LED617IP44CWE	C	18	1440	6500	white	225	21	20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | Light source: SMD 2835 | Recessed mounted luminaire | Beam angle: 120° | Driver: Isolated
Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WATERPROOF LED PANEL ROUND

99LED609IP65
99LED609IP65CW



WATERPROOF LED PANEL ROUND

99LED611IP65
99LED611IP65CW



WATERPROOF LED PANEL ROUND

99LED617IP65
99LED617IP65CW



NEUTRAL
WHITE
4000K

COOL
WHITE
6400K

IP65



WATERPROOF LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP65	99LED609IP65E	C	5	400	4000	white	88	30	1/40	A++A
99LED609IP65CW	99LED609IP65CWE	C	5	400	6500	white	88	30	1/40	A++A
99LED611IP65	99LED611IP65E	C	10	800	4000	white	150	27	1/40	A++A
99LED611IP65CW	99LED611IP65CWE	C	10	800	6500	white	150	27	1/40	A++A
99LED617IP65	99LED617IP65E	C	18	1440	4000	white	225	27	1/20	A++A
99LED617IP65CW	99LED617IP65CWE	C	18	1440	6500	white	225	27	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: polycarbonate (pc) | Reflector: polycarbonate (pc) | Light source: Epistar | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SUPER SLIM LED PANELS
WITH SLIDABLE FIXING CLIPS



SUPER SLIM LED PANELS
WITH SLIDABLE FIXING CLIPS

SUPER SLIM LED PANELS WITH SLIDABLE FIXING CLIPS



NEUTRAL
WHITE
4000K

IP40

SUPER SLIM LED PANELS WITH SLIDABLE FIXING CLIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter/ Length (mm)	Width (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99LED934/W	C	15	1000	4000	white	173		11	50-160	1/40	A++A
99LED935/W	C	15	1000	4000	white	175	175	20	50-160	1/40	A++A

Body: aluminium | Light source: San'an 2835SMD | 175-264V AC | Can be mounted in cut sizes from 50 to 160mm



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND OM

99xLED628
99xLED627
99xLED627CW



LED PANEL ROUND OM

99XLED623
99XLED622
99XLED622CW



LED PANEL ROUND OM

99XLED626
99XLED625
99XLED625CW



IP40



LED PANELS ROUND OM STELLAR

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99XLED626	-	C	12	840	2700	white	165	32	1/30	A++A
99XLED625	-	C	12	840	4000	white	165	32	1/30	A++A
99XLED625CW	-	C	12	840	6500	white	165	32	1/30	A++A
99XLED623	99XLED623E	C	18	1350	2700	white	219	32	1/20	A++A
99XLED622	99XLED622E	C	18	1350	4000	white	219	32	1/20	A++A
99XLED622CW	99XLED622CWE	C	18	1350	6500	white	219	32	1/20	A++A
99XLED628	99XLED628E	C	24	1800	2700	white	295	32	1/20	A++A
99XLED627	99XLED627E	C	24	1800	4000	white	295	32	1/20	A++A
99XLED627CW	99XLED627CWE	C	24	1800	6500	white	295	32	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Voltage: 185-240V | Body: aluminium | Starting time: <0.5s | Power factor: λ>0.8

OM - surface mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL ROUND OM
99LED623T



LED PANEL ROUND OM
99LED625T



LED PANEL ROUND OM
99LED627



LED PANEL ROUND OM
99LED625

LED PANEL ROUND OM

710

LED PANELS



LED PANEL ROUND OM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED625T	F	12	960	2700-3000	white	170	38	1/24	A++A
99LED623T	F	18	1440	2700-3000	white	225	38	1/24	A++A
99LED625	F	13	1040	2700-3000	satın nickel	170	38	1/40	A++A
99LED627	F	21	1680	2700-3000	satın nickel	220	38	1/20	A++A

Body: aluminium | Light source: Epistar SMD 2835 | Starting time: <0.5s | Power factor: $\lambda > 0.8$ | OM - surface mounted luminaire





LED PANEL ROUND OM

99LED966CW

99LED966

99LED966WW



LED PANEL ROUND OM

99LED965CW

99LED965

99LED965WW



IP40



LED PANEL ROUND OM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED965CW	C	18	1530	6300-6500	white	175	33	1/60	A++A
99LED965	C	18	1530	4000-4300	white	175	33	1/60	A++A
99LED965WW	C	18	1530	2700-3000	white	175	33	1/60	A++A
99LED966CW	C	28	2500	6300-6500	white	225	33	1/20	A++A
99LED966	C	28	2500	4000-4300	white	225	33	1/20	A++A
99LED966WW	C	28	2500	2700-3000	white	225	33	1/20	A++A

Voltage: 185-240V | Body: Polycarbonate (PC) | Starting time: <0.5s | Power factor: λ>0.8

OM - surface mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED FIXTURES WITH
ADJUSTABLE COLOUR TEMPERATURE
99DS406



LED FIXTURES WITH
ADJUSTABLE COLOUR TEMPERATURE AND SENSOR
99DS407

LED FIXTURES WITH ADJUSTABLE COLOUR TEMPERATURE / SENSOR

712

LED PANELS



LED FIXTURES WITH ADJUSTABLE COLOUR TEMPERATURE / SENSOR

Catalogue number	Product category	Sensor	Watt (W)	Whole fixture lumens (lm)	Colour body	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99DS406	F	No	18	1440	white	3000 / 4000 / 6000	220	18.8	1/40	A++A
99DS407	F	Yes	18	1440	white	3000 / 4000 / 6000	220	18.8	1/40	A++A

Input Voltage: 110-240 VAC | Body: Alluminium | Light source: Sanan SMD2835 | Starting Time: <0.5s | Power factor: λ>0.9



3 options of colour temperature:
1. Cool White 6000K
2. Neutral White 4000K
3. Warm White 3000K





92DL840/WH



92DL1240/WH



INDIRECT LED DOWNLIGHTS

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
92DL840/WH	92DL840/WHE	C	8	320	4000K	white	111	35	92	1/1	A++A
92DL1240/WH	92DL1240/WHE	C	12	480	4000K	white	149	45	130	1/1	A++A

Body: aluminium



FRONT



BACK



Emergency kit with a possibility for work in an emergency regime more than two hours.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL STELLAR SQUARE

99XLED637
99XLED636
99XLED636CW



LED PANEL STELLAR SQUARE

99XLED635
99XLED634
99XLED634CW



LED PANEL STELLAR SQUARE

99XLED633
99XLED632
99XLED632CW



LED PANEL STELLAR SQUARE OM

99XLED969
99XLED970



LED PANELS STELLAR SQUARE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99XLED633	99XLED633E	C	12	840	2700	white	167	167	18	150	150	1/24	A++A
99XLED632	99XLED632E	C	12	840	4000	white	167	167	18	150	150	1/24	A++A
99XLED632CW	99XLED632CWE	C	12	840	6500	white	167	167	18	150	150	1/24	A++A
99XLED635	99XLED635E	C	18	1350	2700	white	221	221	18	200	200	1/20	A++A
99XLED634	99XLED634E	C	18	1350	4000	white	221	221	18	200	200	1/20	A++A
99XLED634CW	99XLED634CWE	C	18	1350	6500	white	221	221	18	200	200	1/20	A++A
99XLED637	99XLED637E	C	24	1800	2700	white	296	296	18	275	275	1/20	A++A
99XLED636	99XLED636E	C	24	1800	4000	white	296	296	18	275	275	1/20	A++A
99XLED636CW	99XLED636CWE	C	24	1800	6500	white	296	296	18	275	275	1/20	A++A
99XLED969	99XLED969E	C	18	1350	4000	white	220	220	32	-	-	1/20	A++A
99XLED970	99XLED970E	C	24	1800	4000	white	300	300	32	-	-	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | Light source: SMD 2835 | Starting time: <0.5s | Power factor: 0.55 | Recessed mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL SQUARE

99LED968CW

99LED968

99LED968WW



LED PANEL SQUARE

99LED967CW

99LED967

99LED967WW



LED PANEL SQUARE OM

99LED969CW

99LED969

99LED969WW



IP40



LED PANEL SQUARE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99LED967CW	99LED967CWE	C	12	890	6400	white	175	175	13	155	155	1/20	A++A
99LED967	99LED967E	C	12	890	4000	white	175	175	13	155	155	1/20	A++A
99LED967WW	99LED967WWE	C	12	890	2700	white	175	175	13	155	155	1/20	A++A
99LED968CW	99LED968CWE	C	18	1420	6400	white	225	225	13	205	205	1/20	A++A
99LED968	99LED968E	C	18	1420	4000	white	225	225	13	205	205	1/20	A++A
99LED968WW	99LED968WWE	C	18	1420	2700	white	225	225	13	205	205	1/20	A++A
99LED969CW	99LED969CWE	C	18	1420	6400	white	220	220	32			1/20	A++A
99LED969	99LED969E	C	18	1420	4000	white	220	220	32			1/20	A++A
99LED969WW	99LED969WWE	C	18	1420	2700	white	220	220	32			1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | Light source: Epistar SMD | Starting time: <0.5s | Power factor: λ>0.8

OM - surface mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED PANEL SQUARE
99LED635T



LED PANEL SQUARE
99LED633T
99LED633



LED PANEL SQUARE OM
99LED637T

LED PANEL SQUARE

716

LED PANELS



UNTIL SUPPLY
LAST

LED PANEL SQUARE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Length1 (mm)	Width1 (mm)	Packing/Box (pcs)	Energy class
99LED633T	F	9	720	2700-3000	white	148	148	21	130	130	1/40	A++A
99LED633	F	12	960	2700-3000	white	145	145	21	130	130	1/40	A++A
99LED635T	F	18	1440	2700-3000	white	218	218	21	200	200	1/20	A++A
99LED637T	F	18	1440	2700-3000	white	225	-	21	-	-	1/24	A++A

Body: aluminium | Light source: Epistar SMD | Starting time: <0.5s | Power factor: λ>0.8

OM - surface mounted luminaire





LED GLASS PANEL ROUND

99LED640

99LED641



LED GLASS PANEL ROUND

99LED638

99LED639



LED GLASS PANEL SQUARE

99LED644

99LED645



LED GLASS PANEL SQUARE

99LED642

99LED643



IP40



LED GLASS PANELS ROUND / SQUARE

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter/Length (mm)	Height (mm)	Diameter1/Length1 (mm)	Packing/Box (pcs)	Energy class
99LED638	99LED638E	C	6	480	4000	white	100	35	60	1/100	A++A
99LED639	99LED639E	C	6	480	2700	white	100	35	60	1/100	A++A
99LED640	99LED640E	C	18	1440	4000	white	200	35	148	1/20	A++A
99LED641	99LED641E	C	18	1440	2700	white	200	35	148	1/20	A++A
99LED642	99LED642E	C	6	480	4000	white	97	40	77	1/100	A++A
99LED643	99LED643E	C	6	480	2700	white	97	40	77	1/100	A++A
99LED644	99LED644E	C	18	1440	4000	white	200	40	180	1/20	A++A
99LED645	99LED645E	C	18	1440	2700	white	200	40	180	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | Light source: Epistar SMD2835 | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



3+2
standard
+extended



5 YEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECESSED LED FIXTURE GLOSS
95GLOSS24



RECESSED LED FIXTURE BRILLIANCE
95BRILLIANCE24

RECESSED LED FIXTURE GLOSS / BRILLIANCE

718

LED FIXTURES



RECESSED LED FIXTURE GLOSS / BRILLIANCE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter 1 (mm)	Packing/Box (pcs)	Energy class
95GLOSS24	F	24	1800	6500	White	220	20	205	1/20	A++A
95BRILLIANCE24	F	24	1800	6500	White	220	20	205	1/20	A++A



Gloss



Brilliance



Clips

Body: Aluminium | Reflector: polycarbonate (pc) | Light source: Sanan SMD2835 | Starting time: <0.5s

Easy installation due to handy clips | Recessed mounted luminaire.





IVOR
95IVOR22LED



ASIA
95ASIA24LED



NEUTRAL
WHITE
4000K

IP40



CEILING LAMPS IVOR/ ASIA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95IVOR22LED	C	22	1800	4000	Black+gold	400	100	1/1	A++A
95ASIA24LED	C	24	2200	4000	Chrome	350	55	1/1	A++A

Body: Metal | Surface mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NEOS
95NEOS18LED



REGO
95REGO18LED

NEOS

LED FIXTURES



CEILING LAMPS REGO / NEOS WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95REGO18LED	C	18	1260	CCT - adjustable	White	410	90	1/5	A++A
95NEOS18LED	C	18	2160	CCT - adjustable	White & Chrome	380	50	1/5	A++A

Body: Metal and plastic | Surface mounted luminaire | Beam angle: Rego- 130°; Neos- 120° | LED chip: Rego- SANAN 5730; Neos- SANAN 2835 with LENS



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LUCE

95LUCE24LED
95LUCE36LED

SELENA

95SELENA18LED

NEUTRAL
WHITE
4000K

IP40



CEILING LAMPS SELENA / LUCE WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95SELENA18LED	C	18	1170	CCT - adjustable	Chrome	400	60	1/5	A++A
95LUCE24LED	C	24	1480	CCT - adjustable	Chrome	410	70	1/5	A++A
95LUCE36LED	C	36	2150	CCT - adjustable	Chrome	510	80	1/5	A++A

Body: Metal | Surface mounted luminaire | Beam angle: Luce- 130°; Selena- 120° | LED chip: Luce- SANAN 2835 with LENS; Selena- SANAN 5730



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SHELLY
95SHELLY18LED/WH



SHELLY
95SHELLY18LED/GR

SHELLY

722

LED FIXTURES



CEILING LAMPS SHELLY WITH REMOTE CONTROL

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95SHELLY18LED/WH	C	18	2160	CCT - adjustable	White	400	60	1/5	A++→A
95SHELLY18LED/GR	C	18	2160	CCT - adjustable	Black	400	60	1/5	A++→A

Body: Metal | Surface mounted luminaire | Beam angle: 120° | LED chip: SANAN 2835 with LENS



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ASTRA
95ASTRA24LED



NEUTRAL
WHITE
4000K

IP40



CEILING LAMPS ASTRA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ASTRA24LED	C	24	1440	4000	Chrome	410	90	1/1	A++A

Body: Metal | Surface mounted luminaire



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NEIL
95NEIL14LED/WH



MALIA
95MALIA12LED/WH



MALIA
95MALIA24LED/BL




IP20



LED FIXTURES NEIL/ MALIA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95NEIL14LED/WH	C	14	770	4200	white	240		60	1/30	A++A
95MALIA12LED/WH	C	12	660	4200	white	120	130		1/30	A++A
95MALIA12LED/BL	C	12	660	4200	black	120	130		1/30	A++A
95MALIA24LED/WH	C	24	1320	4200	white	265	130	100	1/20	A++A
95MALIA24LED/BL	C	24	1320	4200	black	265	130	100	1/20	A++A

Body: Aluminium & acrylic | Light source: SANAN SMD2835 | Flicker free | Driver: isolated IC



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DONUT
95DONUT20LED



DONUT
95DONUT32LED



NEUTRAL
WHITE
4000K

IP20



ROUND CEILING LAMP DONUT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95DONUT20LED	C	20	1300	4000	white	285	80	1	A++A
95DONUT32LED	C	32	2000	4000	white	385	95	1	A++A

Body: Metal+ MS | Light source: Nationstar SMD 2835 | Surface mounted luminaire | Beam angle: 120°



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TRACY SUPER SLIM
95TRACYLED20
95TRACYLED32



TRACY SUPER SLIM
95TRACYLED20
95TRACYLED32
95TRACYLED42



TRACY SUPER SLIM
95TRACYLED80



TRACY SUPER SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length/Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95TRACYLED20	C	20	1400	4000	white	20	290	-	65	1/10	A++A
95TRACYLED32	C	32	2400	4000	white	20	390	-	65	1/10	A++A
95TRACYLED42	C	42	2950	4000	white	20	480	-	65	1/10	A++A
95TRACYLED20	C	20	1400	4000	white	20	280	280	60	1/10	A++A
95TRACYLED32	C	32	2400	4000	white	20	330	330	65	1/10	A++A
95TRACYLED80	C	80	6000	4000	white	20	790	-	108	1/1	A++A

Material: Metal bottom and MS cover | LED driver: mounted in the body | Light source: 2835 SMD



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

**LITE**

95LITE12LED

95LITE24LED

**SENSOR LIGHT**

99DS401

**SHINE**

95SHINE16LED

**SHINE**

95SHINE36LED

NEUTRAL
WHITE
4000K**IP40****LITE / SHINE**

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LITE12LED	C	12	960	4000	white	40	250	250	100	1/20	A++A
95LITE24LED	C	24	1920	4000	white	40	350	350	100	1/10	A++A
99DS401	C	12	800	4000	white	40	290	290	80	1/10	A++A
95SHINE16LED	C	16	1040	4000	white	40	330	330	107	1/10	A++A
95SHINE36LED	C	36	2340	4000	white	40	480	480	115	1/5	A++A



detail SHINE 16W / 36W

Body: polycarbonate | LED driver: mounted in the body | Light source: EPISTAR

95DS401 - Detection Distance: max. 6m (<24°), Time Delay: 10 sec ± 3 sec to 3 min ± 30 sec (adjustable), Ambient Light: < 3-2000LUX



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
95LIGHTS6




LED WALL LIGHT
95LIGHTB6
95LIGHTB12



LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIGHTS6	C	6W	480	4000	white	140	70	1/20	A++A
95LIGHTB6	C	6W	480	4000	white	135	45	1/36	A++A
95LIGHTB12	C	12W	960	4000	white	180	45	1/24	A++A



Body material: Aluminium | Light source 95lights6: Epistar COB | Light source 95lightb6/9: Epistar SMD2835



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
ROUND IP54
White / Black / Grey



LED WALL LIGHT
SQUARE IP54
White / Black / Grey



LED WALL LIGHT
ROUNDED IP65
White / Black / Grey



NEUTRAL
WHITE
4000K


IP54

IP65



LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
969LED100R/WH	C	2X5W	Round	900	4000	white	130	110	100	1/12	A++A
969LED100R/BL	C	2X5W	Round	900	4000	black	130	110	100	1/12	A++A
969LED100R/GR	C	2X5W	Round	900	4000	grey	130	110	100	1/12	A++A
969LED100S/WH	C	2X5W	Square	900	4000	white	100	100	100	1/10	A++A
969LED100S/BL	C	2X5W	Square	900	4000	black	100	100	100	1/10	A++A
969LED100S/GR	C	2X5W	Square	900	4000	grey	100	100	100	1/10	A++A
969LEDW12/WH	C	2X6W	Rounded	1080	4000	white	175	28	90	1/40	A++A
969LEDW12/BL	C	2X6W	Rounded	1080	4000	black	175	28	90	1/40	A++A
969LEDW12/GR	C	2X6W	Rounded	1080	4000	grey	175	28	90	1/40	A++A

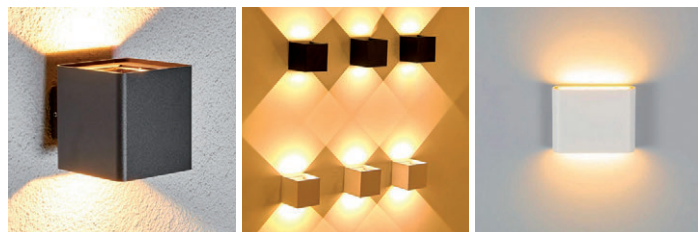

Body material: Aluminium | Diffuser: Glass | Light source 969led100: Epistar LED COB Light source 969LEDW12: Epistar SMD2835



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



CABINET LAMP WITH SENSOR
99DS408



LED NIGHT LAMP WITH USB
99USB2




CABINET HINGE LED LIGHT
9HINGE2



CABINET LAMP WITH SENSOR / LED NIGHT LAMP WITH USB

Catalogue number	Product category	Watt (W)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99DS408	C	1.5	4000	white	88	26	1/50	A++A
99USB2	C	0.5	4000	white	90	61	1/64	A++A
9HINGE2	C	2	-	grey	20	48	1/300	A++A



High-quality ABS material, environmental-friendly, sturdy and durable to use. Easy to install and convenient to use| Operated by 12V 23A battery (Not included) | When opening the cabinet, lamp will turn on automatically. When closing the cabinet, the light turns off

CABINET LAMP WITH SENSOR - Mode: ON/OFF & auto | Battery: 3 X AAA | Sensor distance: max. 4m | Duration: 30s | Sensors: PIR sensor- workt when light intensity is less than 10lx

LED NIGHT LAMP with USB - Mode: ON/OFF & auto | Sensors: PIR sensor- workt when light intensity is less than 10lx



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DOWNLIGHT



ELR627
92627/W



ELR627
92627/SN



ELR627
92627/CH



ELR627
92627/AB

ELR627 - BATHROOM, IP44

732

DOWNLIGHT

IP44



ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/W	C	ELR627	90	33	60	white	1/100	A ⁺⁺ →E
92627/SN	C	ELR627	90	33	60	satin nickel	1/100	A ⁺⁺ →E
92627/CH	C	ELR627	90	33	60	chrome	1/100	A ⁺⁺ →E
92627/AB	C	ELR627	90	33	60	antique brass	1/100	A ⁺⁺ →E

Body: steel | Diffuser: glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-144
92144/CH



SA-044
92044/G



SA-144
92144/RAB

IP44



UNTIL SUPPLY
LAST

SA

Catalogue number	Product category	Model	Diameter (mm)	Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92044/G	F	SA-044	80	-	37	71	gold	1/50	A⁺⁺→E
92144/CH	F	SA-144	-	85	48	72	chrome	1/50	A⁺⁺→F
92144/RAB	F	SA-144	-	85	48	72	red antique brass	1/50	A⁺⁺→E

Body: steel | Diffuser: glass | Ring: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.





CR-776
925776R/GD



CR-776
925776S/GD

CR-776

734

DOWNLIGHT



UNTIL SUPPLY
LAST

IP20

CR-776

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
925776R/GD	F	Spotlight	Chrome and gold	90	-	25	60	1/50	A++→E
925776S/GD	F	Spotlight	Chrome and gold	90	90	25	60	1/50	A++→E

Material: Aluminium with glass and crystal, Lamps Not Included
*Until Supply Last

12V

MR-16

GU5.3

max. 50W

RoHS

CE

3+2 standard+extended

5 YEAR TOTAL WARRANTY



CR-773
925773R/CL



CR-773
925773S/CL

IP20



CR-773

Catalogue number	Product category	Width/ Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/ Box (pcs)	Energy class
925773R/CL	C	100	-	50	60	1/50	A++→E
925773S/CL	C	105	105	50	60	1/50	A++→E

Material: Stainless steel with crystal, Lamps Not Included





CR-771
925P771R/CL



CR-772
925772S/CL



CR-772
925772S/CF

IP20



CR-771 / CR-772

Catalogue number	Product category	Watt (W)	Diameter (mm)	Height (mm)	Cutting hole (mm)	Colour temp. (K)	Packing/ Box (pcs)	Energy class
925P771R/CL	C	3	95	22	60	4000K	1/50	A++A
925772S/CL	C	3	100	22	60	4000K	1/50	A++A
925772S/CF	C	3	100	22	60	4000K	1/50	A++A

Material: Aluminium & polyester with decorative LED lighting 150lm, Lamps Not Included, 3W Driver for LED ring included





CR-774
925774S/CL



CR-775
925775S/CL


IP20



CR-774 / CR-775

Catalogue number	Product category	Watt (W)	Diameter (mm)	Height (mm)	Cutting hole (mm)	Colour temp. (K)	Packing/ Box (pcs)	Energy class
925774S/CL	C	3	100	22	60	4000	1/50	A++A
925775S/CL	C	3	100	22	60	4000	1/50	A++A

Material: Aluminium & polyester with decorative LED lighting 150lm, Lamps Not Included, 3W Driver for LED ring included

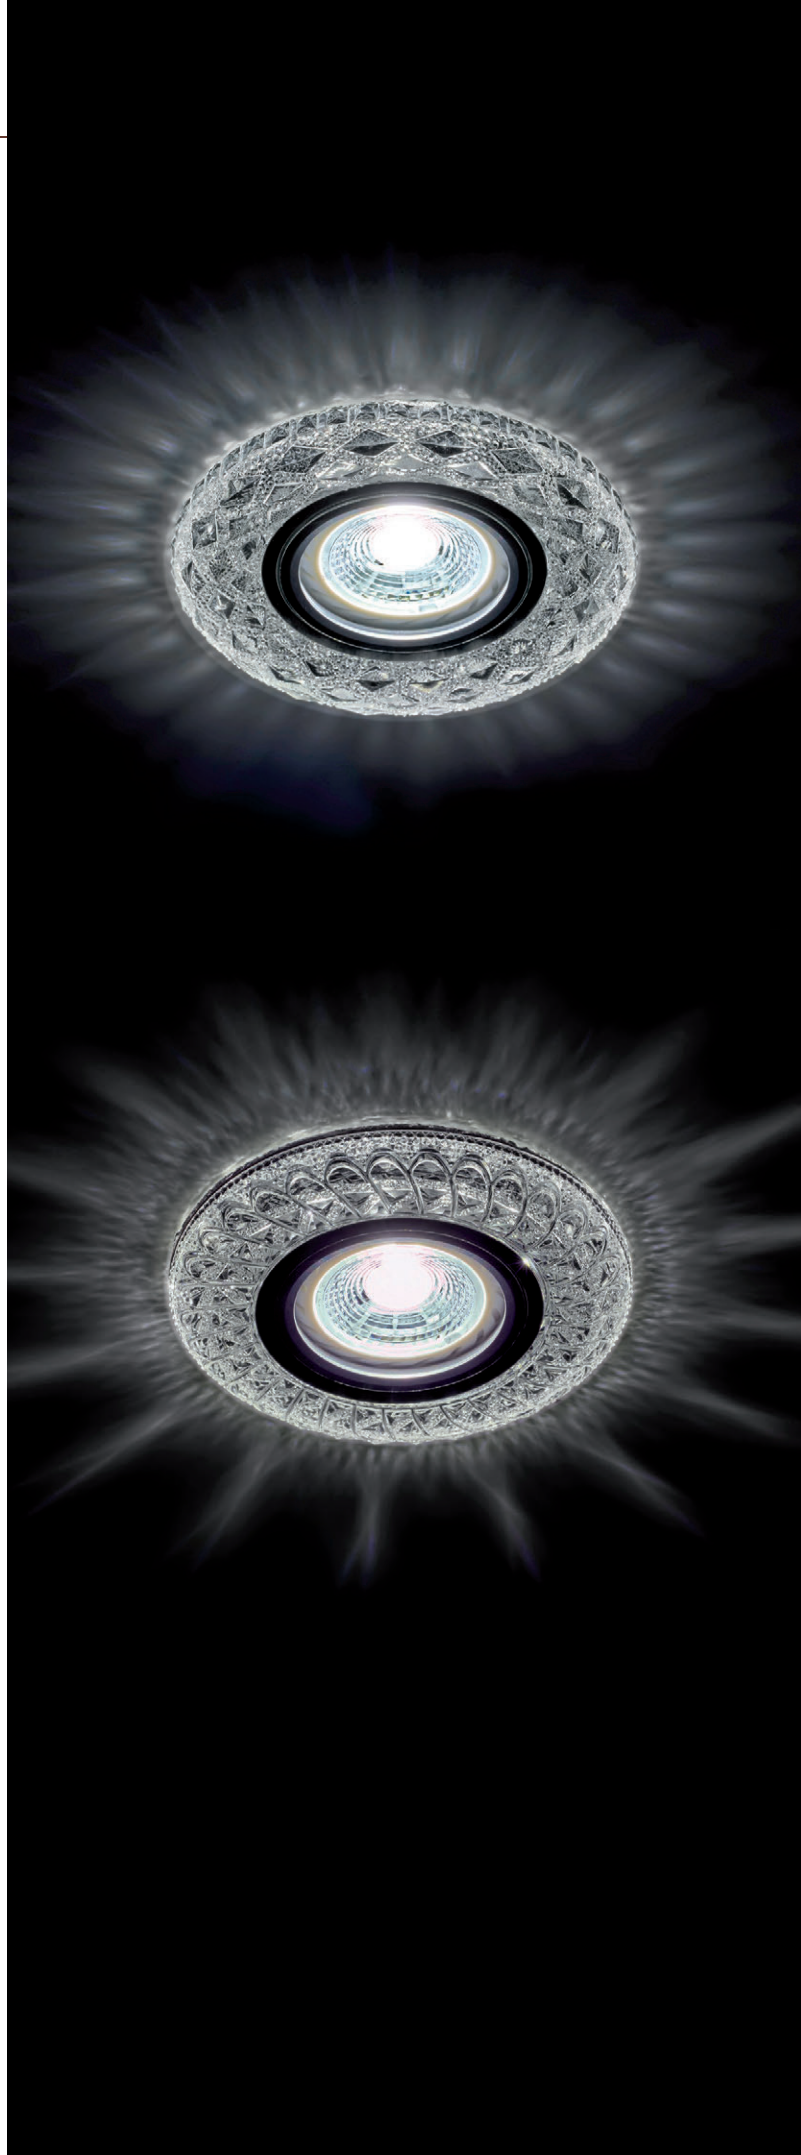



CR-777
925777R/BK



CR-777
925777S/BK



CR-778
925778R/CL



CR-778
925778S/CL

CR-777 / CR-778

738

DOWNLIGHT

IP20



CR-777 / CR-778

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
925777R/BK	C	Spotlight	Chrome and black	90	-	22	60	1/50	A++E
925777S/BK	C	Spotlight	Chrome and black	90	90	22	60	1/50	A++E
925778R/CL	C	Spotlight	Chrome and clear	90	-	32	60	1/50	A++E
925778S/CL	C	Spotlight	Chrome and clear	90	90	32	60	1/50	A++E

Material: Aluminium with glass, Lamps Not Included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045R1/WHFR



SA-045
92045S1/WHFR



SA-045
92045R1/BLFR



SA-045
92045S1/BLFR

IP20



SA-045

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045R1/WHFR	C	Downlight	white	98		45	70	1/50	A++E
92045R1/BLFR	C	Downlight	black	98		45	70	1/50	A++E
92045S1/WHFR	C	Downlight	white	92	92	45	70	1/50	A++E
92045S1/BLFR	C	Downlight	black	92	92	45	70	1/50	A++E

Material: Aluminium with acrylic, Lamps Not Included. LED bulb only



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045S2/WHFR



SA-045
92045S3/WHFR



SA-045
92045S4/WHFR



IP20

SA-045

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045S2/WHFR	C	Downlight	white	92	182	45	165x70	1/50	A++E
92045S3/WHFR	C	Downlight	white	95	275	45	240x70	1/20	A++E
92045S4/WHFR	C	Downlight	white	180	180	45	150x150	1/20	A++E

Material: Aluminium with acrylic, Lamps Not Included. LED bulb only



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-045
92045S2/BLFR



SA-045
92045S3/BLFR



SA-045
92045S4/BLFR



IP20

SA-045

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Cutting hole (mm)	Packing/Box (pcs)	Energy class
92045S2/BLFR	C	Downlight	black	92	182	45	165x70	1/50	A++E
92045S3/BLFR	C	Downlight	black	95	275	45	240x70	1/20	A++E
92045S4/BLFR	C	Downlight	black	180	180	45	150x150	1/20	A++E

Material: Aluminium with acrylic, Lamps Not Included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



92GDL05R
92GDL09R



92GDL11R



92GDL06S
92GDL10S



92GDL06SGL



92GDL13S



92GDL14LED5



IP20

GYPSUM DOWNLIGHTS

Catalogue number	Product category	Model	Lamp holder	Diameter/ Length (mm)	Diameter 1 (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92GDL05R	C	round	GU10	100	90	-	40	white	1/20	A++E
92GDL09R	C	round	GU10	128	108	-	43	white	1/20	A++E
92GDL11R	C	round	GU10	131	116	-	72	white	1/20	A++E
92GDL06S	C	square	GU10	122	107/107	122	57	white	1/20	A++E
92GDL10S	C	square	GU10	122	107/107	122	60	white	1/20	A++E
92GDL06SGL	C	square with diffuser	GU10	120	100/100	120	56	white	1/20	A++E
92GDL13S	C	square	GU10	120	100/100	120	58	white	1/20	A++E
92GDL14LED5	C	square	LED CREE 1W	142	-	170	50	white	1/20	A++E



92GDL06S

92GDL14LED5: 70 lm/4000K/Beam angle 30°

Material: Plaster | Lamp not included


With the purchase of additional lampholder GU10/G9, spotlights can be used with 230V GU10/G9 lamps.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



92GDL08W



92GDL07W



92GDL12W




92GDL15W

IP20



GYPSUM WALL FIXTURES

Catalogue number	Product category	Model	Lamp holder	Diameter/ Length (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92GDL07W	C	square	G9	75	100	100	white	1/20	A++→E
92GDL08W	C	round	G9	70	100	100	white	1/20	A++→E
92GDL12W	C	round	G9	100	180	90	white	1/20	A++→E
92GDL15W	C	round	E27	300	165	120	white	1/12	A++→E



92GDL07W


92GDL08W

92GDL12W

Material: Plaster | Lamp not included

With the purchase of additional lampholder GU10/G9, spotlights can be used with 230V GU10/G9 lamps.

*In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.*



**BOUTIQUES
MINI LED
DOWNLIGHTS**

99JR1201WW/SN


99JR1201CW/SN



**BOUTIQUES
MINI LED
DOWNLIGHTS**

99JR1202WW/GL

99JR1202CW/GL



**BOUTIQUES
MINI LED
DOWNLIGHTS**


99JR1203WW/WH

99JR1203CW/WH



BOUTIQUES MINI LED DOWNLIGHTS

Catalogue number	Product category	Wattage (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Body material	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
99JR1201WW/SN	C	3	150	2700-3000	30°	satın nickel	aluminium	48	22	32	1/100	A⁺
99JR1201CW/SN	C	3	150	6000-6400	30°	satın nickel	aluminium	48	22	32	1/100	A⁺
99JR1202WW/GL	C	3	150	2700-3000	30°	transparent	PMMA+ aluminium	45	41	32	1/100	A⁺
99JR1202CW/GL	C	3	150	6000-6400	30°	transparent	PMMA+ aluminium	45	41	32	1/100	A⁺
99JR1203WW/WH	C	3	150	2700-3000	30°	white	aluminium	50	43	32	1/100	A⁺
99JR1203CW/WH	C	3	150	6000-6400	30°	white	aluminium	50	43	32	1/100	A⁺



Residences, Jewelry, Showrooms, Hotels & Boutiques etc.

Light source: LED COB

Easy installation due to handy clips.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-71
9271/SN-CH



SA-71
9271/PCH-CH



SA-71
9271/GR-CH



SA-91
9291/SN-CH



SA-91
9291/GR-CH



SA-91
9291/PCH-CH



IP20

SA

Catalogue number	Product category	Model category	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9271/SN-CH	C	SA-71	Fixed	78	25	58	satin nickel/chrome	1/100	A++→E
9271/PCH-CH	C	SA-71	Fixed	78	25	58	pearl chrome/chrome	1/100	A++→E
9271/GR-CH	C	SA-71	Fixed	78	25	58	graphite/chrome	1/100	A++→E
9291/SN-CH	C	SA-91	Movable	80	25	72	satin nickel/chrome	1/100	A++→E
9291/PCH-CH	C	SA-91	Movable	80	25	72	pearl chrome/chrome	1/100	A++→E
9291/GR-CH	C	SA-91	Movable	80	25	72	graphite/chrome	1/100	A++→E

Body: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



IP20

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9270/W	C	SA-70	Fixed	78	25	58	white	1/100	A++→E
9270/CH	C	SA-70	Fixed	78	25	58	chrome	1/100	A++→E
9270/SN	C	SA-70	Fixed	78	25	58	satin nickel	1/100	A++→E
9270/AB	C	SA-70	Fixed	78	25	58	antique brass	1/100	A++→E
9290/W	C	SA-90	Movable	85	25	70	white	1/100	A++→E
9290/CH	C	SA-90	Movable	85	25	70	chrome	1/100	A++→E
9290/SN	C	SA-90	Movable	85	25	70	satin nickel	1/100	A++→E
9290/AB	C	SA-90	Movable	85	25	70	antique brass	1/100	A++→E

Body: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-702
92702/CH



SA-702H
92702H/G



SA-702H
92702H/SN

IP20



UNTIL SUPPLY
LAST

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92702/CH	F	SA-702	Fixed	78	40	58	chrome	1/50	A++→E
92702H/SN	F	SA-702H	Movable	78	40	58	satin nickel	1/50	A++→E
92702H/G	F	SA-702H	Movable	78	40	58	gold	1/50	A++→E

Body: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.






SA-712
92712/CH



SA-712H
92712/SN



SA-712
92712/G



SA-712H
92712H/CH



SA-712H
92712H/SN



SA-712H
92712H/G



IP20

UNTIL SUPPLY
LAST

SA

Catalogue number	Product category	Model	Fitting	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92712/CH	F	SA-712	Fixed	78	40	56	chrome	1/50	A++→E
92712/SN	F	SA-712	Fixed	78	40	56	satin nickel	1/50	A++→E
92712/G	F	SA-712	Fixed	78	40	56	gold	1/50	A++→E
92712H/CH	F	SA-712H	Movable	78	40	56	chrome	1/50	A++→E
92712H/SN	F	SA-712H	Movable	78	40	56	satin nickel	1/50	A++→E
92712H/G	F	SA-712H	Movable	78	40	56	gold	1/50	A++→E

Body: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.





SA-710
9271/G



SA-910
9291/G



SIM-5
9205/G



SIM-55
9255/G



IP20

UNTIL SUPPLY
LAST

SIM / SA

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9205/G	F	SIM-5	70	20	56	gold	1/100	A++→E
9255/G	F	SIM-55	70	23	-	gold	1/100	A++→E
9271/G	F	SA-710	78	30	60	gold	1/100	A++→E
9291/G	F	SA-910	84	23	66	gold	1/100	A++→E

Body: aluminium alloy





89144



89147



89151



89152

IP20



UNTIL SUPPLY
LAST

PLASTIC DOWNLIGHTS

Catalogue number	Product category	Model	Diameter -Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
89151	F	PLM- 92W	90	32	70	white	1/1	A ⁺ →E
89152	F	PLS- 92W	90	30	70	white	1/1	A ⁺ →E
89147	F	PSQ- 92W	92/92	25	74	white	1/1	A ⁺ →E
89144	F	PLW- 92W	92/172	27	2X73	white	1/1	A ⁺ →E

Body: Plastic | Lamp not included



89153



89145



89154



89156



89155

IP20UNTIL SUPPLY
LAST**DOWNLIGHTS**

Catalogue number	Product category	Material	Model	Diameter -Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
89145	F	Plastic	PLQQ- 92W	93/93	30	70	white	1/1	A++→E
89153	F	Metal	MS- 92CH	85/85	26	70	chrome	1/1	
89155	F	Metal	MR- 92CH	79	33	69	chrome	1/1	
89154	F	Metal	MS- 92SN	85/85	27	70	satin nickel	1/1	
89156	F	Metal	MR- 92SN	80	30	70	satin nickel	1/1	

Lamp not included





SAS-11
9211/G



SAS-12
9212/G



SAS-12
9212/AB

SAS

752

DOWNLIGHT



UNTIL SUPPLY
LAST

IP20

SAS

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
9211/G	F	SAS-11	32	33	25	gold	1/1	A ⁺⁺ →E
9212/G	F	SAS-12	27	27	24	gold	1/1	A ⁺⁺ →E
9212/AB	F	SAS-12	27	27	24	antique brass	1/1	A ⁺⁺ →E

Body: aluminium alloy






SA-914
92914WW/SN

SA-914
92914WH/G
92914WW/G

SA-914
92914WH/GR
92914WW/GR

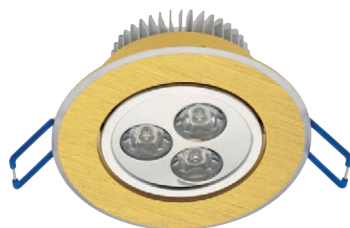

SA-913
92913WH/G
92913WW/G



SAS-14
9214WH/G
9214WW/G



IP40



UNTIL SUPPLY
LAST

SAS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
9214WH/G	F	1	80	4000-4300	gold	60	21	50	1/100	A++A
9214WW/G	F	1	80	2700-3000	gold	60	21	50	1/100	A++A
92913WH/G	F	3	240	4000-4300	gold	88	40	65	1/100	A++A
92913WW/G	F	3	240	2700-3000	gold	88	40	65	1/100	A++A
92914WW/SN	F	3	240	2700-3000	satın nickel	90	41	70	1/100	A++A
92914WH/G	F	3	240	4000-4300	gold	90	41	70	1/100	A++A
92914WW/G	F	3	240	2700-3000	gold	90	41	70	1/100	A++A
92914WH/GR	F	3	240	4000-4300	graphite	90	41	70	1/100	A++A
92914WW/GR	F	3	240	2700-3000	graphite	90	41	70	1/100	A++A

Body: aluminium alloy | Light source: Epistar
LED recessed round spotlight. Easy installation due to handy clips.



2+0
standard
+extended
2 YEAR TOTAL
WARRANTY



92DL840/WH



92DL1240/WH



INDIRECT LED DOWNLIGHTS

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/Box (pcs)	Energy class
92DL840/WH	92DL840/WHE	C	8	320	4000K	white	111	35	92	1/1	A++A
92DL1240/WH	92DL1240/WHE	C	12	480	4000K	white	149	45	130	1/1	A++A

Body: aluminium



FRONT



BACK



Emergency kit with a possibility for work in an emergency regime more than two hours.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



92FLD1530/WH
92FLD1540/WH
92FLD1565/WH



92FLD2530/WH
92FLD2540/WH
92FLD2565/WH



92FLD3530/WH
92FLD3540/WH
92FLD3565/WH



IP44



DEEP RECESSED LED DOWNLIGHT, IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92FLD1530/WH	92FLD1530/WHE	C	15	1350	3000	white	128	70	108	1/40	A++A
92FLD1540/WH	92FLD1540/WHE	C	15	1350	4000	white	128	70	108	1/40	A++A
92FLD1565/WH	92FLD1565/WHE	C	15	1350	6500	white	128	70	108	1/40	A++A
92FLD2530/WH	92FLD2530/WHE	C	25	2250	3000	white	183	97	165	1/20	A++A
92FLD2540/WH	92FLD2540/WHE	C	25	2250	4000	white	183	97	165	1/20	A++A
92FLD2565/WH	92FLD2565/WHE	C	25	2250	6500	white	183	97	165	1/20	A++A
92FLD3530/WH	92FLD3530/WHE	C	35	3150	3000	white	220	100	195	1/20	A++A
92FLD3540/WH	92FLD3540/WHE	C	35	3150	4000	white	220	100	195	1/20	A++A
92FLD3565/WH	92FLD3565/WHE	C	35	3150	6500	white	220	100	195	1/20	A++A

Body: aluminium | Reflector: plastic



FRONT



BACK



Emergency kit with a possibility for work in an emergency regime more than two hours.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SIM-1552



SIM-155



SIM-1553



SIM-255



IP20

UNTIL SUPPLY
LAST

SIM

Catalogue number	Product category	Model	Length (mm)	Width (mm)	Height (mm)	Colour body	Packing/Box (pcs)	Energy class
92255/CH	F	SIM-255	130	130	40	chrome	1/50	A ⁺⁺ →E
92255/AB	F	SIM-255	130	130	40	antique brass	1/50	A ⁺⁺ →E
92255/G	F	SIM-255	130	130	40	gold	1/50	A ⁺⁺ →E
92255K/G	F	SIM-255 with key	130	130	40	gold	1/50	A ⁺⁺ →E
92155/CH	F	SIM-155	82	132	85	chrome	1/50	A ⁺⁺ →E
92155/SN	F	SIM-155	82	132	85	satin nickel	1/50	A ⁺⁺ →E
92155/AB	F	SIM-155	82	132	85	antique brass	1/50	A ⁺⁺ →E
92155/G	F	SIM-155	82	132	85	gold	1/50	A ⁺⁺ →E
92155K/SN	F	SIM-155 with key	82	132	85	satin nickel	1/50	A ⁺⁺ →E
921552K/SN	F	SIM-1552 with key	450	130	80	satin nickel	1/50	A ⁺⁺ →E
921553K/SN	F	SIM-1553 with key	600	130	80	satin nickel	1/50	A ⁺⁺ →E



SIM-255 with key



SIM-155 with key

Body: stainless steel | Model SIM-255K - with switch





GL 222



GL 221



GL FILM



RDL60COB



GL

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92LED221WW	F	GL 221	12X1W	960	2700-3000	aluminium	135	66	120	1/20	A++A
92LED222WH	F	GL 222	18X1W	1260	4000-4300	aluminium	160	95	145	1/12	A++A
92LED222WW	F	GL 222	18X1W	1260	2700-3000	aluminium	160	95	145	1/12	A++A
92LED215WH	F	GL FILM	5	375	4000-5000	white	125	70	110	1/20	A++A
92LED215WW	F	GL FILM	5	375	2700-3000	white	125	70	110	1/20	A++A
92LED216WH	F	GL FILM	10	750	4000-5000	white	165	70	140	1/20	A++A
92DL62040	F	RDL 60 COB	20	1800	4000-4300	white	140	97	120	1/12	A++A

Body: aluminium | Diffuser: glass | Light source: Epistar

Power factor: $\lambda > 0.9$ | Starting time: $< 0.5s$ | LED recessed round downlight COB. Easy installation due to handy clips.



GL 201E
satin nickel / white



GL 202E
satin nickel / white



GL 203E
satin nickel / white



GL205E
satin nickel / white



GL 204E
satin nickel / white



GL103E
satin nickel / white



IP44



UNTIL SUPPLY
LAST

DOWNLIGHT SET WITH LED STICK LAMPS

Catalogue number 4000K	Catalogue number 2700K	Product category	Type	Watt (W)	LED lamp lumens (lm)	Socket type	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class	
92201LEDW/SN	92201LEDWW/SN	F	GL201E	2X9	2x750	E27	satin nickel	226	110	210	1/12	A ⁺	A ⁺⁺ A
92201LEDW/W	92201LEDWW/W	F	GL201E	2X9	2x750	E27	white	226	110	210	1/12	A ⁺	A ⁺⁺ A
92202LEDW/SN	92202LEDWW/SN	F	GL202E	2X9	2x750	E27	satin nickel	226	110	210	1/12	A ⁺	A ⁺⁺ A
92202LEDW/W	92202LEDWW/W	F	GL202E	2X9	2x750	E27	white	226	110	210	1/12	A ⁺	A ⁺⁺ A
92203LEDW/SN	92203LEDWW/SN	F	GL203E	2X9	2x750	E27	satin nickel	235	110	210	1/12	A ⁺	A ⁺⁺ A
92203LEDW/W	92203LEDWW/W	F	GL203E	2X9	2x750	E27	white	235	110	210	1/12	A ⁺	A ⁺⁺ A
92204LEDW/SN	92204LEDWW/SN	F	GL204E	2X9	2x750	E27	satin nickel	230	110	210	1/12	A ⁺	A ⁺⁺ A
92204LEDW/W	92204LEDWW/W	F	GL204E	2X9	2x750	E27	white	230	110	210	1/12	A ⁺	A ⁺⁺ A
92205LEDW/SN	92205LEDWW/SN	F	GL205E	2X9	2x750	E27	satin nickel	225	110	210	1/12	A ⁺	A ⁺⁺ A
92205LEDW/W	92205LEDWW/W	F	GL205E	2X9	2x750	E27	white	225	110	210	1/12	A ⁺	A ⁺⁺ A
92103LEDW/TCH	92103LEDWW/TCH	F	GL103E	2X9	2x750	E27	satin nickel	190	100	170	1/12	A ⁺	A ⁺⁺ A
92103LEDW/W	92103LEDWW/W	F	GL103E	2X9	2x750	E27	white	190	100	170	1/12	A ⁺	A ⁺⁺ A



Downlight



LED STICKS LAMP



LED STICKS LAMP



White



Satin nickel





GL 206E
satin nickel / white



GL 210E
satin nickel / white



GL 213E
satin nickel / white



GL 214E
satin nickel / white



GL 211E
satin nickel / white



GL 120E
satin nickel / white



DOWNLIGHT SET WITH LED STICK LAMPS

Catalogue number 4000K	Catalogue number 2700K	Product category	Type	Watt (W)	LED lamp lumens (lm)	Socket type	Colour body	Diameter (mm)	Height (mm)	Diameter1 (mm)	Packing/ Box (pcs)	Energy class
92206LEDW/GH	92206LEDWW/GH	F	GL206E	2X9	2x750	E27	graphite/chrome	225	110	210	1/12	A+ A++A
92206LEDW/SH	92206LEDWW/SH	F	GL206E	2X9	2x750	E27	satin nickel/chrome	225	110	210	1/12	A+ A++A
92210LEDW/SN	92210LEDWW/SN	F	GL210E	2X9	2x750	E27	satin nickel	228	110	210	1/12	A+ A++A
92210LEDW/W	92210LEDWW/W	F	GL210E	2X9	2x750	E27	white	228	110	210	1/12	A+ A++A
92211LEDW/SN	92211LEDWW/SN	F	GL211E	2X9	2x750	E27	white	230	110	210	1/12	A+ A++A
92211LEDW/W	92211LEDWW/W	F	GL211E	2X9	2x750	E27	satin nickel	230	110	210	1/12	A+ A++A
92213LEDW/SN	92213LEDWW/SN	F	GL213E*	2X9	2x750	E27	satin nickel	266	65	-	1/12	A+ A++A
92213LEDW/W	92213LEDWW/W	F	GL213E*	2X9	2x750	E27	white	266	65	-	1/12	A+ A++A
92214LEDW/SN	92214LEDWW/SN	F	GL214E*	2X9	2x750	E27	satin nickel	240	60	-	1/12	A+ A++A
92214LEDW/W	92214LEDWW/W	F	GL214E*	2X9	2x750	E27	white	240	60	-	1/12	A+ A++A
92120LED6W/TCH	92120LED6WW/TCH	F	GL120E	1X9	750	E27	satin nickel	190	200	170	1/12	A+ A++A
92120LED6W/W	92120LED6WW/W	F	GL120E	1X9	750	E27	white	190	200	170	1/12	A+ A++A
92120LED4W/TCH	92120LED4WW/TCH	F	GL120E	1X9	750	E27	satin nickel	140	160	120	1/12	A+ A++A
92120LED4W/W	92120LED4WW/W	F	GL120E	1X9	750	E27	white	140	160	120	1/12	A+ A++A



Downlight



LED STICKS LAMP



LED STICKS LAMP



White



Satin nickel

*surface mounting





QUAD612

92Q61240WH
92Q61227WH
92Q61240DGR
92Q61227DGR



QUAD312

92Q31240WH
92Q31227WH



QUAD412

92Q41240WH
92Q41227WH
92Q41240DGR
92Q41227DGR



IP20



UNTIL SUPPLY
LAST

QUAD

Catalogue number	Product category	Watt	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92Q31240WH	F	3X15W	3825	4000K	white	490	192	143		A ⁺ A ⁺⁺ A
92Q31227WH	F	3X15W	3825	2700K	white	490	192	143		A ⁺ A ⁺⁺ A
92Q41240WH	F	4X15W	5100	4000K	white	342	342	160		A ⁺ A ⁺⁺ A
92Q41227WH	F	4X15W	5100	2700K	white	342	342	160		A ⁺ A ⁺⁺ A
92Q41240DGR	F	4X15W	5100	4000K	dark grey	342	342	160		A ⁺ A ⁺⁺ A
92Q41227DGR	F	4X15W	5100	2700K	dark grey	342	342	160		A ⁺ A ⁺⁺ A
92Q61240WH	F	6X15W	7650	4000K	white	490	340	140		A ⁺ A ⁺⁺ A
92Q61227WH	F	6X15W	7650	2700K	white	490	340	140		A ⁺ A ⁺⁺ A
92Q61240DGR	F	6X15W	7650	4000K	dark grey	490	340	140		A ⁺ A ⁺⁺ A
92Q61227DGR	F	6X15W	7650	2700K	dark grey	490	340	140		A ⁺ A ⁺⁺ A



white

dark grey

Body: aluminium | Light source: LED lamp PAR30 LED recessed downlight. Easy installation due to handy clips.





SKY TLOM

WARM
WHITE
2700KNEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP40

UNTIL SUPPLY
LAST

SKY TLR / SKY TLOM

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
	93TLOM180W/BL	93TLOM180W/GR	F	20	1800	4000	aluminium	130	98	24°	1/24	A++A
93TLOM180WW/WH		93TLOM180WW/GR	F	20	1800	2700	aluminium	130	98	24°	1/24	A++A
93TLOM180CW/WH	93TLOM180CW/BL	93TLOM180CW/GR	F	20	1800	6400	aluminium	130	98	24°	1/24	A++A
93TLOM190W/WH	93TLOM190W/BL	93TLOM190W/GR	F	30	2700	4000	aluminium	163	145	24°	1/12	A++A
93TLOM190WW/WH		93TLOM190WW/GR	F	30	2700	2700	aluminium	163	145	24°	1/12	A++A
93TLOM190CW/WH	93TLOM190CW/BL	93TLOM190CW/GR	F	30	2700	6400	aluminium	163	145	24°	1/12	A++A



SKY TLOM



SKY TLOM



white colour



black colour



grey colour





DL-044 SQUARE
92DL044S1/BL



DL-044 SQUARE
92DL044S1/BLWH



DL-044 SQUARE
92DL044S1/GDWH



DL-044 SQUARE
92DL044S1/GDBL

DL-044 SQUARE

DOWNLIGHT

IP20



DL-044 SQUARE

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044S1/BL	C	Downlight	black	108	108	100	1/30	A++→E
92DL044S1/BLWH	C	Downlight	black & white	108	108	100	1/30	A++→E
92DL044S1/GDWH	C	Downlight	gold & white	108	108	100	1/30	A++→E
92DL044S1/GDBL	C	Downlight	gold & black	108	108	100	1/30	A++→E

Body: Aluminium | Lamps Not Included | Lamp holder: GU10



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




DL-044 SQUARE
92DL044S2/BL



DL-044 SQUARE
92DL044S2/BLWH



DL-044 SQUARE
92DL044S2/GDWH

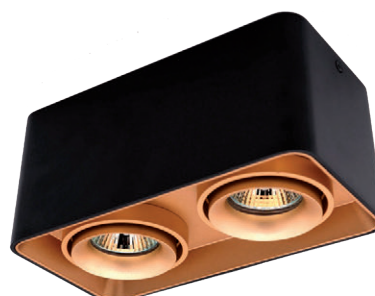

DL-044 SQUARE
92DL044S2/GDBL

IP20



DL-044 SQUARE

Catalogue number	Product category	Description	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044S2/BL	C	Downlight	black	205	205	100	1/10	A++→E
92DL044S2/BLWH	C	Downlight	black & white	205	205	100	1/10	A++→E
92DL044S2/GDWH	C	Downlight	gold & white	205	205	100	1/10	A++→E
92DL044S2/GDBL	C	Downlight	gold & black	205	205	100	1/10	A++→E

Body: Aluminium | Lamps Not Included | Lamp holder: GU10



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SKY TLR

SKY TLR / SKY TLOM



UNTIL SUPPLY
LAST

SKY TLR / SKY TLOM

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TLR503W/WH	93TLR503W/BL		F	10	900	4000	aluminium	142	105	24°	1/12	A++A
	93TLR503WW/BL	93TLR503WW/GR	F	10	900	2700	aluminium	142	105	24°	1/12	A++A
93TLR503CW/WH	93TLR503CW/BL	93TLR503CW/GR	F	10	900	6400	aluminium	142	105	24°	1/12	A++A
93TLR504W/WH	93TLR504W/BL	93TLR504W/GR	F	15	1350	4000	aluminium	142	105	24°	1/12	A++A
93TLR504WW/WH		93TLR504WW/GR	F	15	1350	2700	aluminium	142	105	24°	1/12	A++A
93TLR504CW/WH	93TLR504CW/BL	93TLR504CW/GR	F	15	1350	6400	aluminium	142	105	24°	1/12	A++A



SKY TLR



SKY TLR



white colour



black colour



grey colour



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



DL-044 ROUND
92DL044R1/WH



DL-044 ROUND
92DL044R1/BL

DL-044 ROUND

765

DOWNLIGHT

IP20



DL-044 ROUND

Catalogue number	Product category	Description	Colour	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92DL044R1/WH	C	Downlight	white	100	125	1/20	A++→E
92DL044R1/BL	C	Downlight	black	100	125	1/20	A++→E

Body: Aluminium | Lamps Not Included | Lamp holder: GU10



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FLCOM COB
White



FLCOM COB
Black

FLCOM COB

DOWNLIGHT

766



NEUTRAL
WHITE
4000K

IP44



FLCOM COB

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92FLCOM1040/WH	92FLCOM1040/BL	C	10	800	4000	90	90	1/8	A++→A
92FLCOM2040/WH	92FLCOM2040/BL	C	20	1600	4000	110	125	1/8	A++→A
92FLCOM3040/WH	92FLCOM3040/BL	C	30	2400	4000	130	155	1/8	A++→A
92FLCOM4040/WH	92FLCOM4040/BL	C	40	3200	4000	170	185	1/8	A++→A

Voltage: 85-265V AC | Body: Aluminium | Beam angle: 60° | Mounting: surface



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RDLOMCOB

92DLOM1040/S

92DLOM1027/S



RDLOMCOB

92DLOM2040/S

92DLOM2027/S





IP40

UNTIL SUPPLY
LAST

RDLOMCOB

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
92DLOM1040/S	F	10	800	4000-4300	silver	95	70	1/24	A++>A
92DLOM1027/S	F	10	800	2700-3000	silver	95	70	1/24	A++>A
92DLOM2040/S	F	20	1600	4000-4300	silver	95	110	1/12	A++>A
92DLOM2027/S	F	20	1600	2700-3000	silver	95	110	1/12	A++>A



Body: aluminium | Light source: Epistar | Power factor: $\lambda > 0.9$ | Starting time: $< 0.5s$
LED surface round downlight COB.





FRANCA 90
96FRANCA90/GR



FRANCA 90
96FRANCA90/BL



IP55

Resin



FRANCA

Catalogue number BLACK body	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96FRANCA90/BL	C	Ceiling fixtures	black	3.5	400	4000	95	115	1xGU10	1/30	A+ A++ A
96FRANCA90/GR	C	Ceiling fixtures	gray	3.5	400	4000	95	115	1xGU10	1/30	A+ A++ A

Body material: Resin | UV resistant | Lamp included



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | 99XLED728 GU10 LED SMD 3.5W 2700K | 99XLED731 GU10 LED SMD 3.5W 6400K
99LED729 GU10 LED SMD 6.5W 4000K | 99LED730 GU10 LED SMD 6.5W 2700K | 99LED796 GU10 LED SMD 6.5W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 60 days.



RECESSED FIXTURES GLOM 222

92GLOM222WH

92GLOM222WW



RECESSED FIXTURES GLOM 223

92GLOM223WW



IP40

UNTIL SUPPLY
LAST

RECESSED FIXTURES GLOM

Catalogue number	Product category	Watt (W)	Whole fixtures lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92GLOM222WH	F	18X1	1260	4000-4300K	165	115	1/1	A++A
92GLOM222WW	F	18X1	1260	2700-3000K	165	115	1/1	A++A

Body: Aluminium | Light source: Epistar | Mounting: surface





TRACK LIGHTING



NOT FOLDING LED FLOODLIGHT, MINI SERIES

93MFL2230/BL

93MFL2240/BL



FOUR POLES MAGNETIC LED FLOODLIGHT, MINI SERIES

Catalogue number	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MFFL1230/BL	C	Folding	12	856	3000	120°	200	118	1	A++A
93MFFL1240/BL	C	Folding	12	856	4000	120°	200	118	1	A++A

Input Voltage: 48V | PF≥ 0.9 | LED Source: OSRAM | Body material: Aluminium | Diffuser material: PC | Body colour: Black



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOLDING LED FLOODLIGHT,
MINI SERIES

93MFFL1230/BL
93MFFL1240/BL
93MFFL1830/BL
93MFFL1840/BL



FOUR POLES MAGNETIC LED FLOODLIGHT, MINI SERIES

Catalogue number	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MFFL1830/BL	C	Folding	18	1317	3000	120°	305	118	1	A++A
93MFFL1840/BL	C	Folding	18	1317	4000	120°	305	118	1	A++A
93MFL2230/BL	C	Not folding	22	1672	3000	120°	585	118	1	A++A
93MFL2240/BL	C	Not folding	22	1672	4000	120°	585	118	1	A++A

Input Voltage: 48V | PF≥ 0.9 | LED Source: OSRAM | Body material: Aluminium | Diffuser material: PC | Body colour: Black



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

93MFGL1230/BL

93MFGL1240/BL



FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

93MFGL1830/BL

93MFGL1840/BL



FOUR POLES MAGNETIC LED GRILL LIGHT, MINI SERIES

Catalogue number	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
WHITE										
93MFGL1230/BL	C	Folding	12	835	3000	30°	200	118	1	A++A
93MFGL1240/BL	C	Folding	12	835	4000	30°	200	118	1	A++A
93MFGL1830/BL	C	Folding	18	1507	3000	30°	305	118	1	A++A
93MFGL1840/BL	C	Folding	18	1507	4000	30°	305	118	1	A++A

Input Voltage: 48V | LED Source: OSRAM | Body material: Aluminium | Body colour: Black



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC
LED LIGHT,
MINI SERIES

93MTL0530/BL
93MTL0540/BL



FOUR POLES
MAGNETIC LED LIGHT,
MINI SERIES

93MTL1030/BL
93MTL1040/BL



FOUR POLES MAGNETIC
LED LIGHT,
MINI SERIES

93MTL1530/BL
93MTL1540/BL



FOUR POLES MAGNETIC LED LIGHT, MINI SERIES

Catalogue number WHITE	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MTL0530/BL	C	Folding	5	286	3000	38°	125	26	1	A++A
93MTL0540/BL	C	Folding	5	286	4000	38°	125	26	1	A++A
93MTL1030/BL	C	Folding	10	1230	3000	38°	160	55	1	A++A
93MTL1040/BL	C	Folding	10	1230	4000	38°	160	55	1	A++A
93MTL1530/BL	C	Folding	15	1692	3000	38°	200	45	1	A++A
93MTL1540/BL	C	Folding	15	1692	4000	38°	200	45	1	A++A

Input Voltage: 48V | PF≥ 0.9 | LED Source: CREE | Body material: Aluminium | Body colour: Black



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FOUR POLES MAGNETIC LED HANGING LIGHT, MINI SERIES

93MPL1530/BL

93MPL1540/BL



FOUR POLES MAGNETIC LED HANGING LIGHT, MINI SERIES

Catalogue number	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
93MPL1530/BL	C	Hanging	15	1894	3000	38°	200	45	1	A++A
93MPL1540/BL	C	Hanging	15	1894	4000	38°	200	45	1	A++A

Input Voltage: 48V | PF≥ 0.9 | LED Source: CREE | Body material: Aluminium | Body colour: Black



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



93MRBM1/BL



93MROM1/BL

93MA015
93MA011

93MA001



93MA002



93MA003



FOUR POLES 48V TRACK RAILS AND ACCESSORIES FOR MAGNETIC LIGHTS MINI SERIES

Catalogue number WHITE	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
93MROM1/BL	C	track rail OM	1000	30	53	1
93MRBM1/BL	C	track rail BM	1000	30	53	1
93MA015	C	end cap for MRBM				1
93MA011	C	end cap for MROM				1
93MA001	C	L ceiling corner BM				1
93MA002	C	L wall ceiling corner BM				1
93MA003	C	L ceiling corner OM				1
93MA004	C	L wall ceiling corner OM				1
93MA013	C	T ceiling connector BM				1
93MA014	C	T ceiling connector OM				1



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



93MA006



93MA007



93MA008



93MA005



93MA010



93MA012



93MA009



FOUR POLES ACCESSORIES FOR MAGNETIC LIGHTS MINI SERIES

Catalogue number WHITE	Product category	Type	Packing/Box (pcs)
93MA005	C	I-flexible connector	1
93MA007	C	I-connector	1
93MA006	C	Input adapter	1
93MA008	C	fixture adaptor	1
93MA009	C	Inside connector	1
93MA010	C	mounting plate	1
93MA012	C	hanging wire	1



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES TRACK LIGHTS SKY TLR



IP40

UNTIL SUPPLY
LAST

TWO & FOUR LINES TRACK LIGHTS SKY TLR

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box (pcs)	Energy class
93TLS503W/WH	93TLS503W/BL		F	2 LINES	10	900	4000	aluminium	142	105	24°	1/12	A++A
	93TLS503WW/BL	93TLS503WW/GR	F	2 LINES	10	900	2700	aluminium	142	105	24°	1/12	A++A
93TLS503CW/WH	93TLS503CW/BL	93TLS503CW/GR	F	2 LINES	10	900	6400	aluminium	142	105	24°	1/12	A++A
93TLS504W/WH	93TLS504W/BL	93TLS504W/GR	F	2 LINES	15	1350	4000	aluminium	142	105	24°	1/12	A++A
93TLS504WW/WH		93TLS504WW/GR	F	2 LINES	15	1350	2700	aluminium	142	105	24°	1/12	A++A
93TLS504CW/WH	93TLS504CW/BL	93TLS504CW/GR	F	2 LINES	15	1350	6400	aluminium	142	105	24°	1/12	A++A
934TLS503W/WH	934TLS503W/BL		F	4 LINES	10	900	4000	aluminium	142	105	24°	1/12	A++A
	934TLS503WW/BL		F	4 LINES	10	900	2700	aluminium	142	105	24°	1/12	A++A
934TLS503CW/WH	934TLS503CW/BL		F	4 LINES	10	900	6400	aluminium	142	105	24°	1/12	A++A
934TLS504W/WH	934TLS504W/BL		F	4 LINES	15	1350	4000	aluminium	142	105	24°	1/12	A++A
934TLS504WW/WH			F	4 LINES	15	1350	2700	aluminium	142	105	24°	1/12	A++A
934TLS504CW/WH	934TLS504CW/BL		F	4 LINES	15	1350	6400	aluminium	142	105	24°	1/12	A++A



SKY TLR



SKY TLR





TWO & FOUR LINES SKY TL5
White / Black



TWO & FOUR LINES SKY TL5

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TL5LEDW/WH	93TL5LEDW/BL	C	2 LINES	6,5	500	4000	57	147	40°	1/100	A ⁺ A ⁺⁺ →E
93TL5LEDWW/WH	93TL5LEDWW/BL	C	2 LINES	6,5	500	2700	57	147	40°	1/100	A ⁺ A ⁺⁺ →E
93TL5	93TL5LEDBL	C	Empty				57	147		1/100	A ⁺⁺ →E
94TL5LEDW/WH	94TL5LEDW/BL	C	4 LINES	6,5	500	4000	57	147	40°	1/100	A ⁺ A ⁺⁺ →E
94TL5LEDWW/WH	94TL5LEDWW/BL	C	4 LINES	6,5	500	2700	57	147	40°	1/100	A ⁺ A ⁺⁺ →E
94TL5	94TL5LEDBL	C	Empty				57	147		1/100	A ⁺⁺ →E

Body: aluminium



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO LINES SKY TL5016
White / Black / Grey

TWO LINES SKY TL5016

780

TRACK LIGHTING



TWO LINES SKY TL5016

Catalogue number	Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
WHITE	BLACK									
93TL5016CW/WH	93TL5016CW/BL	F	30	2400	6400	120	140	36°	1/34	A++A

Body: aluminium



TWO & FOUR LINES SKY FTL
blackTWO & FOUR LINES SKY FTL
whiteWARM
WHITE
2700KNEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP40



TWO AND FOUR LINES SKY FTL

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Length (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93FTL25WW/WH	93FTL25WW/BL	C	2 LINES	25	2250	3000K	100	140	235	38°	1/20	A++A
93FTL25W/WH	93FTL25W/BL	C	2 LINES	25	2250	4000K	100	140	235	38°	1/20	A++A
93FTL25CW/WH	93FTL25CW/BL	C	2 LINES	25	2250	6000K	100	140	235	38°	1/20	A++A
93FTL35WW/WH	93FTL35WW/BL	C	2 LINES	35	3150	3000K	100	140	235	38°	1/20	A++A
93FTL35W/WH	93FTL35W/BL	C	2 LINES	35	3150	4000K	100	140	235	38°	1/20	A++A
93FTL35CW/WH	93FTL35CW/BL	C	2 LINES	35	3150	6000K	100	140	235	38°	1/20	A++A
934FTL25WW/WH	934FTL25WW/BL	C	4 LINES	25	2250	3000K	100	140	235	38°	1/20	A++A
934FTL25W/WH	934FTL25W/BL	C	4 LINES	25	2250	4000K	100	140	235	38°	1/20	A++A
934FTL25CW/WH	934FTL25CW/BL	C	4 LINES	25	2250	6000K	100	140	235	38°	1/20	A++A
934FTL35WW/WH	934FTL35WW/BL	C	4 LINES	35	3150	3000K	100	140	235	38°	1/20	A++A
934FTL35W/WH	934FTL35W/BL	C	4 LINES	35	3150	4000K	100	140	235	38°	1/20	A++A
934FTL35CW/WH	934FTL35CW/BL	C	4 LINES	35	3150	6000K	100	140	235	38°	1/20	A++A

Body: aluminium



side view black



back view black



side view white



back view white



93SKY01/W

CONNECTOR
TWO LINES RAILS
White: 93SKY01/W
Black: 93SKY01/BL
Grey: 93SKY01/G

93SKY03/W

CONNECTOR
FOUR LINES RAILS
White: 93SKY03/W
Black: 93SKY03/BL

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO LINES SKY TL5030

White / Black / Grey



TWO LINES SKY TL5020

White / Black / Grey



IP40



TWO LINES SKY TL 20W

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY*	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box (pcs)	Energy class
93TL5020W/WH	93TL5020W/BL		C	20	1800	4000	93	125	36°	1/20	A++A
93TL5020WW/WH	93TL5020WW/BL	93TL5020WW/GR	C	20	1800	2700	93	125	36°	1/20	A++A
93TL5020CW/WH	93TL5020CW/BL	93TL5020CW/GR	C	20	1800	6400	93	125	36°	1/20	A++A



IP40

UNTIL SUPPLY
LAST

TWO LINES SKY TL 30W

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box (pcs)	Energy class
93TL5030W/WH	93TL5030W/BL	93TL5030W/GR	F	30	2700	4000	93	125	36°	1/20	A++A
93TL5030WW/WH	93TL5030WW/BL	93TL5030WW/GR	F	30	2700	2700	93	125	36°	1/20	A++A
93TL5030CW/WH	93TL5030CW/BL	93TL5030CW/GR	F	30	2700	6400	93	125	36°	1/20	A++A

Body: aluminium | * Until Supply Last- Product Category F



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SKY TL809
White / Black / Grey



SKY TL808
White / Black / Grey



IP40



TWO AND FOUR LINES SKY TL

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93SKY164*	93SKY264*	F	2L TL809	12	1080	6400	130	95	180	38°	1/1	A+ A+→E
93TL809/WH	93TL809/BL	C	2L TL809			empty fixture	130	95	180		1/1	A+→E
93SKY364*	93SKY464*	F	2L TL808	12	1080	6400	150	100	210	38°	1/1	A+ A+→E
93SKY1540		C	2L TL809	15	1275	4000	130	95	180	90°	1/1	A+ A+→E
93SKY1527		C	2L TL809	15	1275	2700	130	95	180	90°	1/1	A+ A+→E
93SKY1564		C	2L TL809	15	1275	6400	130	95	180	90°	1/1	A+ A+→E
93SKY3540	93SKY4540	C	2L TL808	15	1275	4000	150	100	210	90°	1/1	A+ A+→E
93SKY3527	93SKY4527	C	2L TL808	15	1275	2700	150	100	210	90°	1/1	A+ A+→E
93SKY3564	93SKY4564	C	2L TL808	15	1275	6400	150	100	210	90°	1/1	A+ A+→E
94SKY1540		C	4L TL809	15	1275	4000	130	95	180	90°	1/1	A+ A+→E
94SKY1527		C	4L TL809	15	1275	2700	130	95	180	90°	1/1	A+ A+→E
94SKY1564		C	4L TL809	15	1275	6400	130	95	180	90°	1/1	A+ A+→E
94SKY3540	94SKY4540	C	4L TL808	15	1275	4000	150	100	210	90°	1/1	A+ A+→E
94SKY3527	94SKY4527	C	4L TL808	15	1275	2700	150	100	210	90°	1/1	A+ A+→E
94SKY3564	94SKY4564	C	4L TL808	15	1275	6400	150	100	210	90°	1/1	A+ A+→E



15 W Lamp



white colour



12 W Lamp



black colour



12 W Lamp

Body: aluminium | Light source: LED lamp PAR30 | Power factor: $\lambda > 0.9$ | Starting time: $< 1s$

* Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES CINEMA SKY

White / Black / Grey



TWO & FOUR LINES CINEMA SKY

White / Black / Grey



IP40



TWO AND FOUR LINES CINEMA SKY

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box	Energy class
955CINEMACW/WH	955CINEMACW/BL	955CINEMACW/GR	F	2L extendible*	12	1080	6400	145	220	38°	1/6	A+ A++ E
955CINEMA1CW/WH	955CINEMA1CW/BL	955CINEMA1CW/GR	F	2L fixed*	12	1080	6400	145	220	38°	1/6	A+ A++ E
955CINEMA15W/WH	955CINEMA15W/BL	955CINEMA15W/GR	C	2L extendible	15	1275	4000	145	220	90°	1/6	A+ A++ E
955CINEMA15WW/WH	955CINEMA15WW/BL	955CINEMA15WW/GR	C	2L extendible	15	1275	2700	145	220	90°	1/6	A+ A++ E
955CINEMA15CW/WH	955CINEMA15CW/BL	955CINEMA15CW/GR	C	2L extendible	15	1275	6400	145	220	90°	1/6	A+ A++ E
955CINEMA115W/WH	955CINEMA115W/BL	955CINEMA115W/GR	C	2L fixed	15	1275	4000	145	220	90°	1/6	A+ A++ E
955CINEMA115WW/WH	955CINEMA115WW/BL	955CINEMA115WW/GR	C	2L fixed	15	1275	2700	145	220	90°	1/6	A+ A++ E
955CINEMA115CW/WH	955CINEMA115CW/BL	955CINEMA115CW/GR	C	2L fixed	15	1275	6400	145	220	90°	1/6	A+ A++ E
94CINEMA15W/WH	94CINEMA15W/BL		C	4L extendible	15	1275	4000	145	220	90°	1/6	A+ A++ E
94CINEMA15WW/WH	94CINEMA15WW/BL		C	4L extendible	15	1275	2700	145	220	90°	1/6	A+ A++ E
94CINEMA15CW/WH	94CINEMA15CW/BL		C	4L extendible	15	1275	6400	145	220	90°	1/6	A+ A++ E
94CINEMA115W/WH	94CINEMA115W/BL		C	4L fixed	15	1275	4000	145	220	90°	1/6	A+ A++ E
94CINEMA115WW/WH	94CINEMA115WW/BL		C	4L fixed	15	1275	2700	145	220	90°	1/6	A+ A++ E
94CINEMA115CW/WH	94CINEMA115CW/BL		C	4L fixed	15	1275	6400	145	220	90°	1/6	A+ A++ E



15 W Lamp



white colour



12 W Lamp



grey colour



12 W Lamp



black colour



12 W Lamp

Body: aluminium | Light source: LED lamp PAR30 | Power factor: $\lambda > 0.9$ | Starting time: <1s | * Until Supply Last

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TWO & FOUR LINES SKY
TL 2211
White / Black



TWO & FOUR LINES SKY
TL 2211
White / Black



WARM
WHITE
2700K

NEUTRAL
WHITE
4000K

COOL
WHITE
6400K

IP40



TWO AND FOUR LINES SKY TL 2211

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Diameter (mm)	Height (mm)	Beam angle	Packing/ Box	Energy class
93SKY2211CW/WH	93SKY2211CW/BL	F	2 LINES*	12	1080	6400	235	100	160	38°	1/6	A+ A++ E
93SKY2215WW/WH	93SKY2215WW/BL	C	2 LINES	15	1275	2700	235	100	160	90°	1/6	A+ A++ E
93SKY2215W/WH	93SKY2215W/BL	C	2 LINES	15	1275	4000	235	100	160	90°	1/6	A+ A++ E
93SKY2215CW/WH	93SKY2215CW/BL	C	2 LINES	15	1275	6400	235	100	160	90°	1/6	A+ A++ E
94SKY2215WW/WH	94SKY2215WW/BL	C	4 LINES	15	1275	2700	230	100	160	90°	1/1	A+ A++ E
94SKY2215W/WH	94SKY2215W/BL	C	4 LINES	15	1275	4000	230	100	160	90°	1/1	A+ A++ E
94SKY2215CW/WH	94SKY2215CW/BL	C	4 LINES	15	1275	6400	230	100	160	90°	1/1	A+ A++ E



15 W Lamp



12 W Lamp



12 W Lamp



93SKY01/W

CONNECTOR
TWO LINES RAILS
White: 93SKY01/W
Black: 93SKY01/BL
Grey: 93SKY01/G



93SKY03/W

CONNECTOR
FOUR LINES RAILS
White: 93SKY03/W
Black: 93SKY03/BL

Body: aluminium | Light source: LED lamp PAR30 | Power factor: $\lambda > 0.9$ | Starting time: <1s | *Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SKY FIXTURES TLOM
White / Black



SKY FIXTURES TLBM
White / Black

SKY FIXTURES TLOM / TLBM

786

TRACK LIGHTING



SKY FIXTURES TLOM / TLBM

Catalogue number WHITE	Catalogue number BLACK	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Body material	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
93TLOM1540/WH	93TLOM1540/BL	C	15	1350	4000K	Aluminum	55	145	24°	1/24	A++A
93TLOM3040/WH	93TLOM3040/BL	C	30	2700	4000K	Aluminum	90	240	24°	1/15	A++A
93TLBM1540/WH	93TLBM1540/BL	C	15	1350	4000K	Aluminum	73	118	30°	1/50	A++A



TLBM

TLOM



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MH 2000
982000150



MH 2001
98200170
98200170FSCH

IP21




UNTIL SUPPLY
LAST

MH 2000/2001

Catalogue number	Product category	Model	Watt (W)	Lamp	Colour body	Length (mm)	Width (mm)	Diameter/Height (mm)	Energy class
982000150	F	MH 2000	-	-	white	370	185	190	A++→C
98200170	F	MH 2001	-	-	white	190	215	240	A++→C
98200170FSCH	F	MH 2001	70	MHL	white	190	215	240	A++→C


Body: aluminium casting | Ambient Temperature: -30°C ÷ +65°C | Diffuser: Tempered glass | Lamp not included



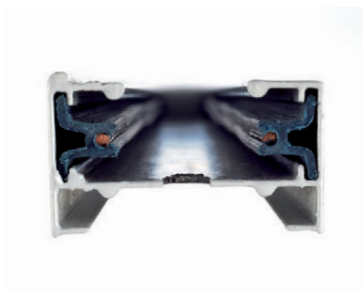

SINGLE-PHASE RAILS

ADAPTER POWER SUPPLY

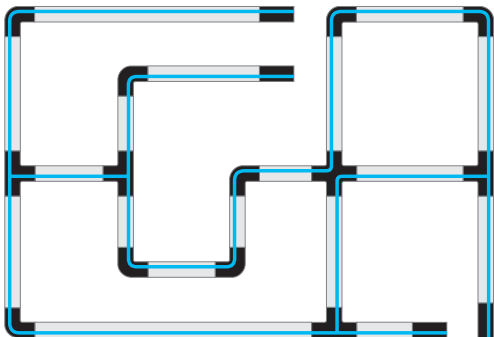

I - TYPE



L - TYPE



T - TYPE



X - TYPE



IP20

TWO LINES TRACK RAILS AND ADAPTERS

Catalogue number WHITE	Catalogue number BLACK	Catalogue number GREY*	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
93101	93301	93501	C	SKYWAY 101 track rails	1000	40	20	1/20
93102	93302		C	SKYWAY 102 track rails	2000	40	20	1/20
93110	93310	93510	C	SKYWAY 110 I-type adapter	80	40	20	1/100
93120	93320	93520	C	SKYWAY 120 L-type adapter	70	40	20	1/100
93130	93330	93530	C	SKYWAY 130 T-type adapter	106	40	20	1/100
93140	93340	93540	C	SKYWAY 140 X-type adapter	106	40	20	1/100

Body material: aluminium
* Until Supply Last: Product category F



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




POWER SUPPLY



I - TYPE




L - TYPE

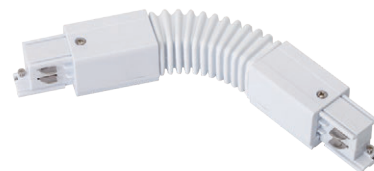

SOFT L - TYPE



FOUR LINES TRACK RAILS



T - TYPE



X - TYPE

IP20



FOUR LINES TRACK RAILS AND ADAPTERS

Catalogue number WHITE	Catalogue number BLACK	Product category	Type	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)
94101	94301	C	four lines track rails*	1000	33.5	42	1/10
94102	94302	C	four lines track rails*	2000	33.5	42	1/10
94110	94310	C	four line I-type connector	160	30	42	1/50
94120	94320	C	four line L-type connector	100	30	100	1/70
94120M	94320M	C	four line soft L-type connector	100	30	100	1/70
94130	94330	C	four line T-type connector	160	30	100	1/50
94140	94340	C	four line X-type connector	160	30	160	1/25
94150	94350	C	four line power supply	160	30	42	1/100
94160	94360	C	end cap				1/100

Material: track rails- aluminium | Accessories: ABS antflaming + cooper sheet

*four lines track rails come without power supply



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.





COMERCIAL LED FIXTURES TRITON

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99TR602640/GR	C	26	3120	4000	90°	grey	600	90	57,6	1/1	A++A
99TR903840/GR	C	38	4560	4000	90°	grey	900	90	57,6	1/1	A++A
99TR1205040/GR	C	50	6000	4000	90°	grey	1200	90	57,6	1/1	A++A
99TR1506440/GR	C	64	7680	4000	90°	grey	1500	90	57,6	1/1	A++A




INSTALLATION ACCESSORIES FOR LED PROFILES

Suspension wire


Catalogue number: 99ACC54

As per personal request, COMERCIAL LED FIXTURES TRITON can be produced with beam angle of 30°, 60°, 25°/25°.




Sharp distribution apply to focusing on objects with tight gap.

Mount up to 20 meters




Narrow distribution apply to narrow passageway.

Mount up to 10 meters




Wide distribution apply to wider passageway.

Mount up to 6 meters



Double asymmetric distribution apply to large gap between shelves.

Mount up to 3 meters



Body: aluminium | Reflector: polycarbonate (PC)



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



COMMERCIAL LED FIXTURES
95204518



COMMERCIAL LED FIXTURES
95204609
95204650




COMMERCIAL LED FIXTURES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95204609	F	9*	820	4000	aluminium	90°	610	65	40	1/10	A++→A
95204518	F	18*	1640	4000	aluminium	120°	605	100	43	1/10	A++→A
95204550	C	50	4800	4000	aluminium	120°	1200	75	35	1/10	A++→A

Body: Alu+PC | Light source: SMD2835 | Input voltage: 220-240V | Mounting: Surface

* Until Supply Last - 3 year standard + extended warranty




Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
92ACC03

Body: Alu+PC | Light source: SMD2835 | Input voltage: 220-240V | Mounting: Surface



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

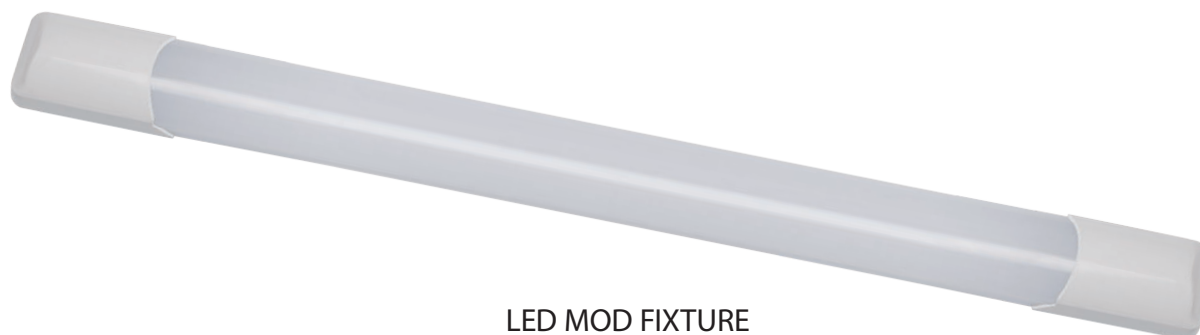

LED MOD FIXTURE

9MOD18W

9MOD36W

CONNECTOR 90°
L-TYPE

9MODL



COUPLING 180° I-TYPE

9MODI



T-JOINT

9MODT

NEUTRAL
WHITE
4000K

IP40



MOD FIXTURE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9MOD18W	C	18	1100	4000	white	615	54	34	1/20	A++A
9MOD36W	C	36	2200	4000	white	1215	54	34	1/20	A++A



Connector 90° L-type

Catalogue number
9MODL
135x135x45mm

Coupling 180° I-type

Catalogue number
9MODI
210x58x45mm


T-joint

Catalogue number
9MODT
210x135x45mm


Body: PC+Iron | Clips: inox | Light source: Sanan 2835 SMD | Starting time: <1s



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

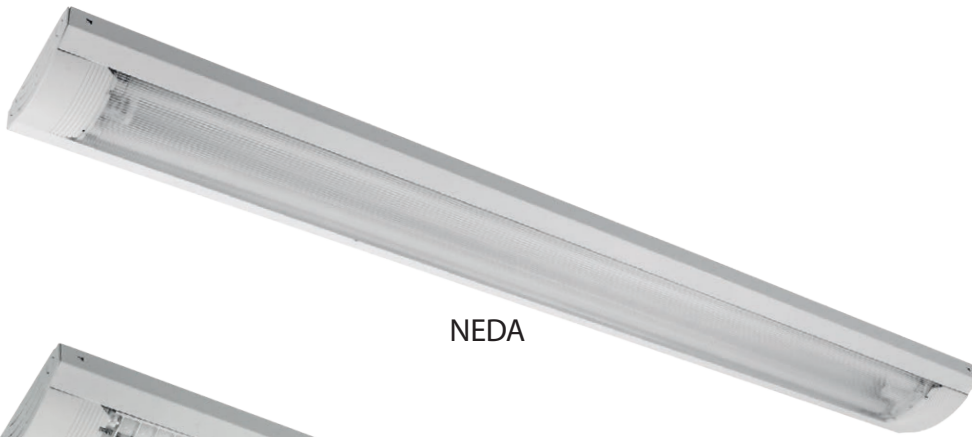

NEDA

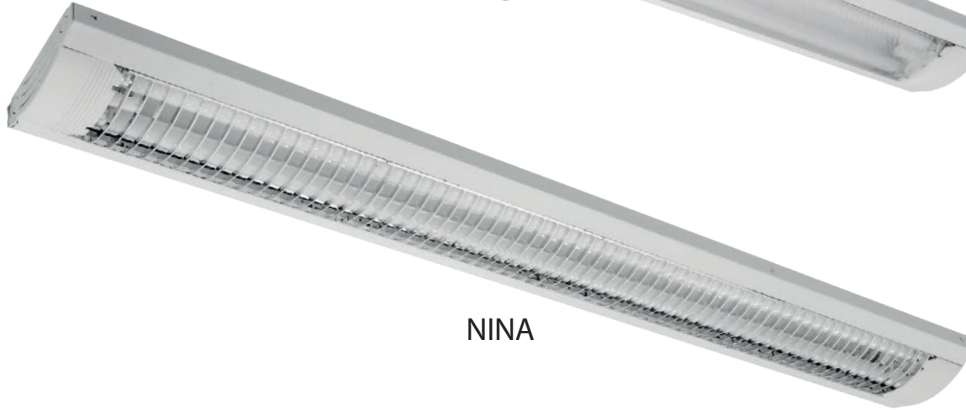

NINA



UNTIL SUPPLY
LAST

NEDA / NINA Luminaire with LED Tubes T8 STELLAR

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LED109CW	F	Neda	1X9	585	6400	white	740	118	48	1/12	A ⁺ A ⁺⁺ →A
95LED109W	F	Neda	1X9	585	4000	white	740	118	48	1/12	A ⁺ A ⁺⁺ →A
95LED209CW	F	Neda	2X9	1170	6400	white	740	160	55	1/6	A ⁺ A ⁺⁺ →A
95LED209W	F	Neda	2X9	1170	4000	white	740	160	55	1/6	A ⁺ A ⁺⁺ →A
920118LED	F	Nina	1X9	585	4000	white	740	118	48	1/12	A ⁺ A ⁺⁺ →A
920118LED CW	F	Nina	1X9	585	6400	white	740	118	48	1/12	A ⁺ A ⁺⁺ →A

with LED tubes STELLAR



Body: white powder painted steel | Reflector: plastic cover (Neda); ABS plastic grid (Nina) | Light source: LED tubes





REMY STELLAR

9XREMY18LED

9XREMY36LED



NEUTRAL
WHITE
4000K

IP40




REMY LUMINAIRE STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XREMY18LED	C	18	1300	4000K	white	600	75	46	1/20	A++A
9XREMY36LED	C	36	2600	4000K	white	1200	75	46	1/20	A++A

Body: PP+PC | LED driver: mounted in the body | Light source: SMD2835 | Input voltage: 220-240V | Beam angle: 115°



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

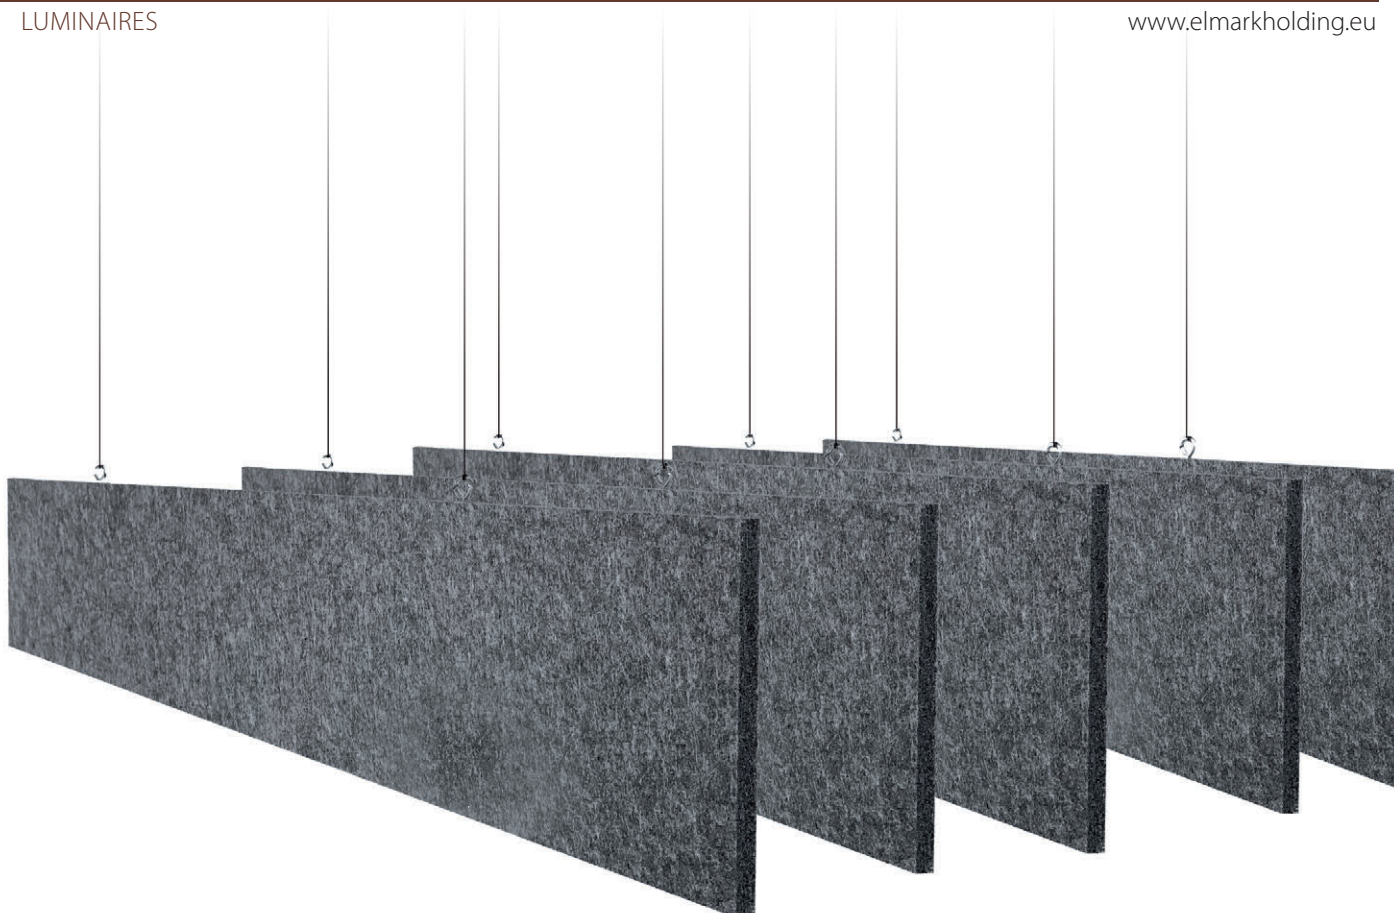

ACOUSTIC BAFFLES

Catalogue number	Product category	Colour	Material	Acoustic rating	Length (mm)	Height (mm)	Depth (mm)
99ACOUSTIC1200/BL	C	Black	Polyester	0.90 NRC	1200	200	9
99ACOUSTIC1200/WH	C	White	Polyester	0.90 NRC	1200	200	9
99ACOUSTIC1200/GR	C	Grey	Polyester	0.90 NRC	1200	200	9
99ACOUSTIC2400/BL	C	Black	Polyester	0.90 NRC	2400	200	9
99ACOUSTIC2400/WH	C	White	Polyester	0.90 NRC	2400	200	9
99ACOUSTIC2400/GR	C	Grey	Polyester	0.90 NRC	2400	200	9




Acoustic sound baffle find application in many work and office spaces, conference and presentation halls, meeting rooms, retails, institutional and more. They significantly reduce noise pollution, minimizing reverberation and echo in the room, absorbing any reflect sounds from other surfaces, thereby increasing speech intelligibility and communication. They are mounted on the ceiling in rows or columns.

Features: High quality and easy mounting | Lightweight | Safe and non-toxic | Available in three colours | Possibility to create custom design

Mounting: Hanging. Attach one piece of wire/cord onto each of the 2 eye hooks on the baffle. Then attach the other end of the wire to two equally-spaced hooks in the ceiling



The products are not held on stock and are supplied only by a customer`s request.

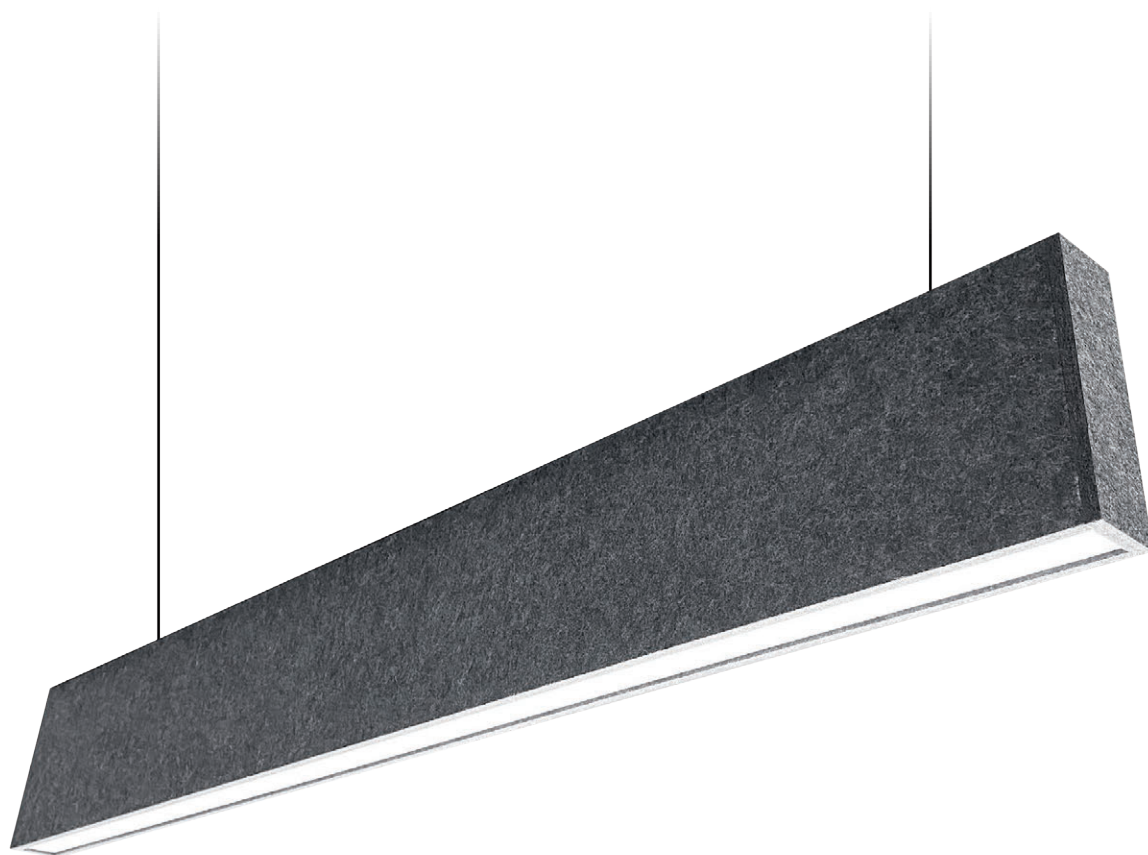


IP40

HIGH POWER

ACOUSTIC HIGH POWER LED PROFILES S36 SERIES FOR HANGING MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM36S4020A/BL	99SM36S4020A/WH	99SM36S4020A/GR	C	20	1600	4000	600	200	55	1/1	A++A
99SM36S4040A/BL	99SM36S4040A/WH	99SM36S4040A/GR	C	40	3200	4000	1200	200	55	1/1	A++A
99SM36S4050A/BL	99SM36S4050A/WH	99SM36S4050A/GR	C	50	4000	4000	1500	200	55	1/1	A++A



INSTALLATION ACCESSORIES FOR LED PROFILES

Suspension wire

Catalogue number: 99ACC51

Suspension wire with console

Catalogue number: 99ACC52

Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver | Light Source: SAMSUNG

3+2
standard
+extended

The products are not held on stock and are supplied only by a customer's request.



ACOUSTIC LED RINGS

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt category (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99RING6004035A/BL	99RING6004035A/WH	99RING6004035A/GR	C	35	3500	4000	600	25	1/1	A++A
99RING8004060A/BL	99RING8004060A/WH	99RING8004060A/GR	C	60	6000	4000	800	25	1/1	A++A
99RING10004075A/BL	99RING10004075A/WH	99RING10004075A/GR	C	75	7500	4000	1000	25	1/1	A++A
99RING11504096A/BL	99RING11504096A/WH	99RING11504096A/GR	C	96	9600	4000	1150	25	1/1	A++A



Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver



The products are not held on stock and are supplied only by a customer's request.

LED RINGS
99RING6004035/BLLED RINGS
99RING8004060/GRNEUTRAL
WHITE
4000K

IP40


LED RINGS

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99RING6004035/BL	99RING6004035/WH	99RING6004035/GR	C	35	3500	4000	600	25	1/1	A++A
99RING8004060/BL	99RING8004060/WH	99RING8004060/GR	C	60	6000	4000	800	25	1/1	A++A
99RING10004075/BL	99RING10004075/WH	99RING10004075/GR	C	75	7500	4000	1000	25	1/1	A++A
99RING11504096/BL	99RING11504096/WH	99RING11504096/GR	C	96	9600	4000	1150	25	1/1	A++A

Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

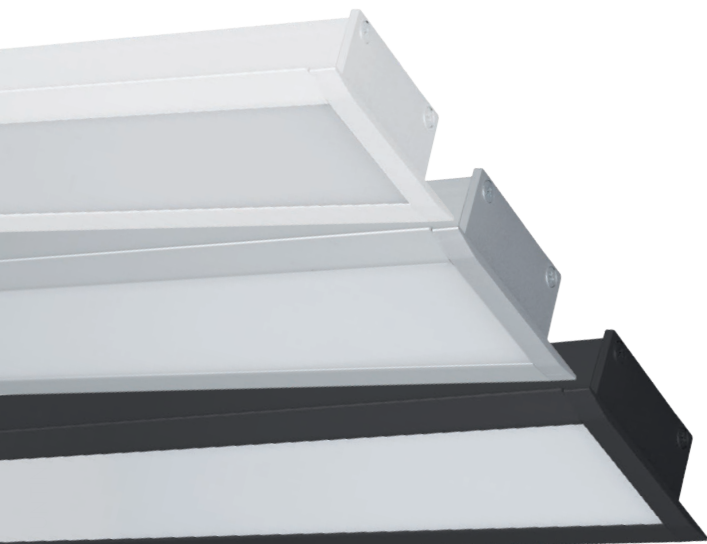

ULTRA THIN LED PROFILES S36 SERIES, RECESSED MOUNTING




NEUTRAL
WHITE
4000K

IP40

ULTRA THIN

ULTRA THIN LED PROFILES S36 SERIES, RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM36S4009/BL	99FM36S4009/WH	99FM36S4009/GR	C	9	630	4000	600	47.74	35.33	13.5	1/1	A++A
99FM36S4018/BL	99FM36S4018/WH	99FM36S4018/GR	C	18	1260	4000	1200	47.74	35.33	13.5	1/1	A++A
99FM36S40225/BL	99FM36S40225/WH	99FM36S40225/GR	C	22.5	1575	4000	1500	47.74	35.33	13.5	1/1	A++A



Body: aluminium | Reflector: polycarbonate (PC) | Clamps: inox | Driver: 24V | Light Source: SAMSUNG




3+2
standard
+extended

5

YEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

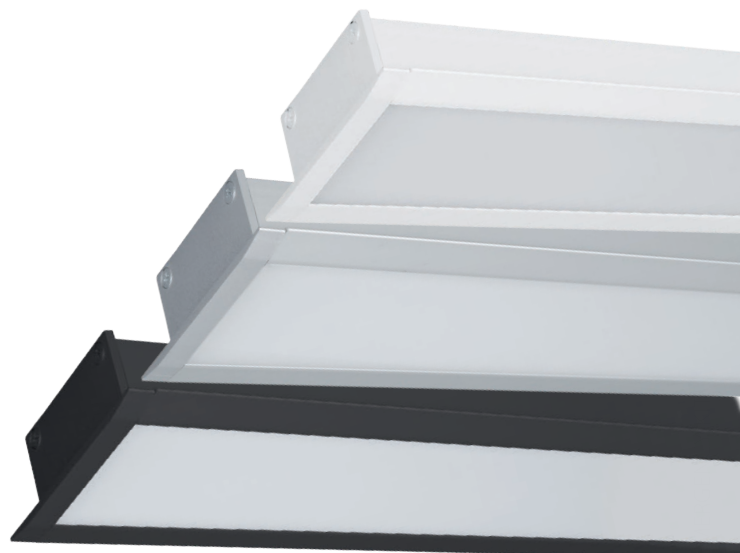NEUTRAL
WHITE
4000K

IP40

LED PROFILES S48 SERIES RECESSED MOUNTING WITH EMERGENCY KIT



Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604012/BLE	99FM604012/WHE	99FM604012/GRE	C	12	1140	4000	600	70	47.8	22.4	1/1	A++A
99FM1204024/BLE	99FM1204024/WHE	99FM1204024/GRE	C	24	2280	4000	1200	70	47.8	22.4	1/1	A++A
99FM1504032/BLE	99FM1504032/WHE	99FM1504032/GRE	C	32	3040	4000	1500	70	47.8	22.4	1/1	A++A

NEUTRAL
WHITE
4000K

IP40

LED PROFILES S48 SERIES RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604012/BL	99FM604012/WH	99FM604012/GR	C	12	1140	4000	600	70	47.8	22.4	1/1	A++A
99FM1204024/BL	99FM1204024/WH	99FM1204024/GR	C	24	2280	4000	1200	70	47.8	22.4	1/1	A++A
99FM1504032/BL	99FM1504032/WH	99FM1504032/GR	C	32	3040	4000	1500	70	47.8	22.4	1/1	A++A



L-corner for LED profiles
S48series recessed
White: 99FML/WH
Black: 99FML/BL
Grey: 99FML/GR
size: 420x420mm




Inside corner for LED profiles
S48 series recessed
White: 99FMI/WH
Black: 99FMI/BL
Grey: 99FMI/GR
size: 420x420mm

Body: aluminium | Reflector: polycarbonate (PC) | Clamps: inox | Driver: 42V SELV driver | Light Source: SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

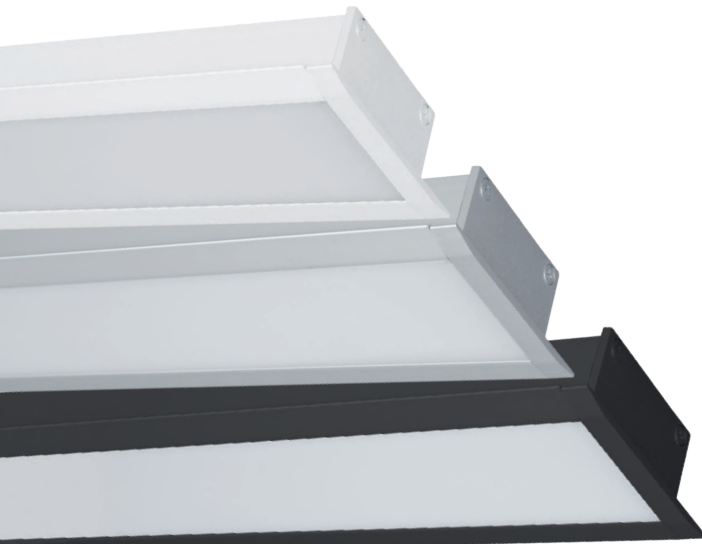

HIGH POWER LED PROFILES S48 SERIES FOR RECESSED MOUNTING



NEUTRAL
WHITE
4000K

IP40

HIGH POWER

HIGH POWER LED PROFILES S48 SERIES FOR RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604020/BLE	99FM604020/WHE	99FM604020/GRE	C	20	1600	4000	600	70	47.8	22.4	1/1	A++A
99FM1204040/BLE	99FM1204040/WHE	99FM1204040/GRE	C	40	3200	4000	1200	70	47.8	22.4	1/1	A++A




NEUTRAL
WHITE
4000K

IP40

HIGH POWER

HIGH POWER LED PROFILES S48 SERIES FOR RECESSED MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99FM604020/BL	99FM604020/WH	99FM604020/GR	C	20	1600	4000	600	70	47.8	22.4	1/1	A++A
99FM1204040/BL	99FM1204040/WH	99FM1204040/GR	C	40	3200	4000	1200	70	47.8	22.4	1/1	A++A
99FM1504050/BL	99FM1504050/WH	99FM1504050/GR	C	50	4000	4000	1500	70	47.8	22.4	1/1	A++A




Body: aluminium | Reflector: polycarbonate (PC) | Clamps: inox | Driver: 42V SELV driver | Light Source: SAMSUNG



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

LUMINAIRES

802

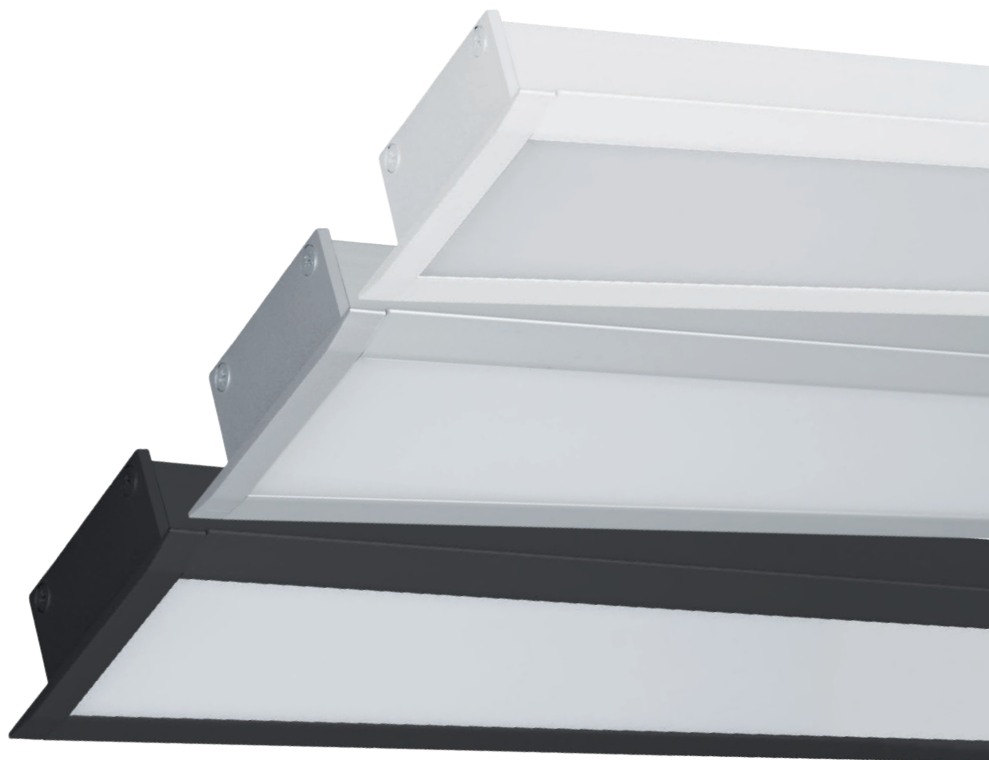NEUTRAL
WHITE
4000K

IP40

LED PROFILES S77 SERIES RECESSED MOUNTING WITH EMERGENCY KIT



Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99BM604024/BLE	99BM604024/WHE	99BM604024/GRE	C	24	2280	4000	600	98.5	77.5	27	1/1	A++A
99BM1204048/BLE	99BM1204048/WHE	99BM1204048/GRE	C	48	4560	4000	1200	98.5	77.5	27	1/1	A++A

NEUTRAL
WHITE
4000K

IP40

LED PROFILES S77 SERIES RECESSED MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Width 1 (mm)	Width 2 (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99BM604024/BL	99BM604024/WH	99BM604024/GR	C	24	2280	4000	600	98.5	77.5	27	1/1	A++A
99BM1204048/BL	99BM1204048/WH	99BM1204048/GR	C	48	4560	4000	1200	98.5	77.5	27	1/1	A++A
99BM1504064/BL	99BM1504064/WH	99BM1504064/GR	C	64	6080	4000	1500	98.5	77.5	27	1/1	A++A



L-corner for LED profiles
S77series recessed
White: 99BML/WH
Black: 99BML/BL
Grey: 99BML/GR
size: 450x450mm



Inside corner for LED profiles
S77 series recessed
White: 99BML/WH
Black: 99BML/BL
Grey: 99BML/GR
size: 450x450mm

Body: aluminium | Reflector: polycarbonate (PC) | Clamps: inox | Driver: 42V SELV driver

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.

3+2
standard
+extended

5

YEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



HIGH POWER LED PROFILES S36 SERIES FOR SURFACE MOUNTING




NEUTRAL
WHITE
4000K

IP40

HIGH POWER

HIGH POWER LED PROFILES S36 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM36S4020/BL	99SM36S4020/WH	99SM36S4020/GR	C	20	1600	4000	600	65.64	35.6	1/1	A++A
99SM36S4040/BL	99SM36S4040/WH	99SM36S4040/GR	C	40	3200	4000	1200	65.64	35.6	1/1	A++A
99SM36S4050/BL	99SM36S4050/WH	99SM36S4050/GR	C	50	4000	4000	1500	65.64	35.6	1/1	A++A



99ACC50

99ACC52

99ACC51

INSTALLATION ACCESSORIES FOR LED PROFILES

Connector

Catalogue number: 99ACC50

Suspension wire

Catalogue number: 99ACC51

Suspension wire with console

Catalogue number: 99ACC52

Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver | Light Source: SAMSUNG



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

~230V 50/60 Hz SMD 90° Ra280 >15000 INSTANT 100% 20000h IP 40 RoHS COMPLIANT EMC 3+2 standard +extended 5 YEAR TOTAL WARRANTY

NEUTRAL
WHITE
4000K

IP40

HIGH POWER

HIGH POWER LED PROFILES S48 SERIES FOR SURFACE MOUNTING


Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM604020/BL	99SM604020/WH	99SM604020/GR	C	20	1600	4000	600	70	47.8	1/1	A++A
99SM1204040/BL	99SM1204040/WH	99SM1204040/GR	C	40	3200	4000	1200	70	47.8	1/1	A++A
99SM1504050/BL	99SM1504050/WH	99SM1504050/GR	C	50	4000	4000	1500	70	47.8	1/1	A++A

NEUTRAL
WHITE
4000K

IP40

LED PROFILES S48 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99SM604012/BL	99SM604012/WH	99SM604012/GR	C	12	1140	4000	600	70	47.8	1/1	A++A
99SM1204024/BL	99SM1204024/WH	99SM1204024/GR	C	24	2280	4000	1200	70	47.8	1/1	A++A
99SM1504032/BL	99SM1504032/WH	99SM1504032/GR	C	32	3040	4000	1500	70	47.8	1/1	A++A



L-corner for LED profiles
S48series surface
White: 99SML/WH
Black: 99SML/BL
Grey: 99SML/GR
size: 420x420mm



99ACC50



99ACC52



99ACC51



INSTALLATION ACCESSORIES FOR LED PROFILES

Connector

Catalogue number: 99ACC50

Suspension wire

Catalogue number: 99ACC51

Suspension wire with console

Catalogue number: 99ACC52


Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver | Light Source: SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



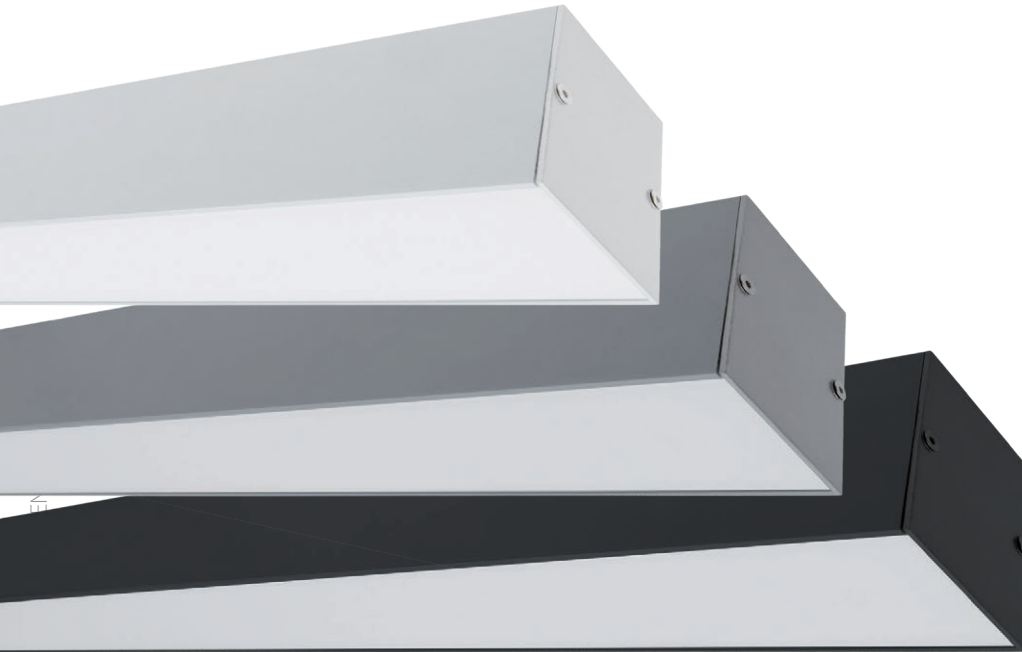


LED PROFILES S77 SERIES FOR SURFACE MOUNTING WITH EMERGENCY KIT

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99OM604024/BLE	99OM604024/WHE	99OM604024/GRE	C	24	2280	4000	600	100	77	1/1	A++A
99OM1204048/BLE	99OM1204048/WHE	99OM1204048/GRE	C	48	4560	4000	1200	100	77	1/1	A++A



LED PROFILES S77 SERIES FOR SURFACE MOUNTING

Catalogue number BLACK	Catalogue number WHITE	Catalogue number GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
99OM604024/BL	99OM604024/WH	99OM604024/GR	C	24	2280	4000	600	100	77	1/1	A++A
99OM1204048/BL	99OM1204048/WH	99OM1204048/GR	C	48	4560	4000	1200	100	77	1/1	A++A
99OM1504064/BL	99OM1504064/WH	99OM1504064/GR	C	64	6080	4000	1500	100	77	1/1	A++A



L-corner for LED profiles
S77series surface
White: 99OML/WH
Black: 99OML/BL
Grey: 99OML/GR
size: 450x450mm



99ACC55



99ACC52



99ACC51



INSTALLATION ACCESSORIES FOR LED PROFILES

Connector

Catalogue number: 99ACC55

Suspension wire

Catalogue number: 99ACC51

Suspension wire with console

Catalogue number: 99ACC52

Body: aluminium | Reflector: polycarbonate (PC) | Driver: 42V SELV driver | Light Source: SAMSUNG

L- corner and Inside corners are ordered within 30 days term, after a preliminary specification of power and colour temperature of LED profiles.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.



IP20



RAINBOW LED SMD

Catalogue number	Product category	Watt (W)	Colour	LED lamp lumens (lm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9RT5300/WH	C	5	White	400	320	22	35	1/25	A++A
9RT5300/WW	C	5	Warm white	400	320	22	35	1/25	A++A
9RT5300/R	F	5	Red*	-	320	22	35	1/25	A++A
9RT5300/G	F	5	Green*	-	320	22	35	1/25	A++A
9RT5300/B	F	5	Blue*	-	320	22	35	1/25	A++A
9RT5600/WH	C	9	White	720	555	22	35	1/25	A++A
9RT5600/WW	C	9	Warm white	720	555	22	35	1/25	A++A
9RT5600/R	F	9	Red*	-	555	22	35	1/25	A++A
9RT5600/G	F	9	Green*	-	555	22	35	1/25	A++A
9RT5900/WH	C	14	White	1120	860	22	35	1/25	A++A
9RT5900/WW	C	14	Warm white	1120	860	22	35	1/25	A++A
9RT5900/R	F	14	Red*	-	860	22	35	1/25	A++A
9RT5900/G	F	14	Green*	-	860	22	35	1/25	A++A
9RT51200/WH	C	18	White	1440	1165	22	35	1/25	A++A
9RT51200/WW	C	18	Warm white	1440	1165	22	35	1/25	A++A
9RT51200/R	F	18	Red*	-	1165	22	35	1/25	A++A
9RT51200/G	F	18	Green*	-	1165	22	35	1/25	A++A



9RT505

Body: PVC | Diffuser: Glass | Light source: SMD 2835 | *Until Supply Last



Light is one of the most important space-shaping elements. Therefore it is worth to consider the quality of the selected lighting fittings.

The SMD LED series of modern fittings is an innovative solution of lighting that is functional and decorative at the same time. The fittings emit high quality light and their compact form, matching contemporary furniture, enables a multitude of arrangements. The fittings can be connected in order to achieve the lighting line of the desired length, and the energy-efficient LED light makes it possible to achieve a spectacular effect in any interior.

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



UNTIL SUPPLY
LAST

IP20

FLUORESCENT LIGHT FIXTURES RAINBOW


Catalogue number	Product category	Type	Watt (W)	Colour body	Ballast	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9RT513/W	F	RAINBOW	13	white	electronic	545	24	35	1/30	B
9RT521/W	F	RAINBOW	21	white	electronic	875	24	35	1/30	B
9RT508/B	F	RAINBOW	8	blue	electronic	315	24	35	1/30	B
9RT513/B	F	RAINBOW	13	blue	electronic	545	24	35	1/30	B
9RT521/B	F	RAINBOW	21	blue	electronic	875	24	35	1/30	B
9RT528/B	F	RAINBOW	28	blue	electronic	1174	24	35	1/30	B
9RT508/G	F	RAINBOW	8	green	electronic	315	24	35	1/30	B
9RT513/G	F	RAINBOW	13	green	electronic	545	24	35	1/30	B
9RT521/G	F	RAINBOW	21	green	electronic	875	24	35	1/30	B
9RT528/G	F	RAINBOW	28	green	electronic	1174	24	35	1/30	B
9RT508/Y	F	RAINBOW	8	yellow	electronic	315	24	35	1/30	B
9RT513/Y	F	RAINBOW	13	yellow	electronic	545	24	35	1/30	B
9RT521/Y	F	RAINBOW	21	yellow	electronic	875	24	35	1/30	B
9RT528/Y	F	RAINBOW	28	yellow	electronic	1174	24	35	1/30	B
9RT508/R	F	RAINBOW	8	red	electronic	315	24	35	1/30	B
9RT513/R	F	RAINBOW	13	red	electronic	545	24	35	1/30	B
9RT521/R	F	RAINBOW	21	red	electronic	875	24	35	1/30	B
9RT528/R	F	RAINBOW	28	red	electronic	1174	24	35	1/30	B



This lighting fixture is compatible with lamps from energy classes: B A A+ A++.

This lighting fixture comes with lamp from energy class: B



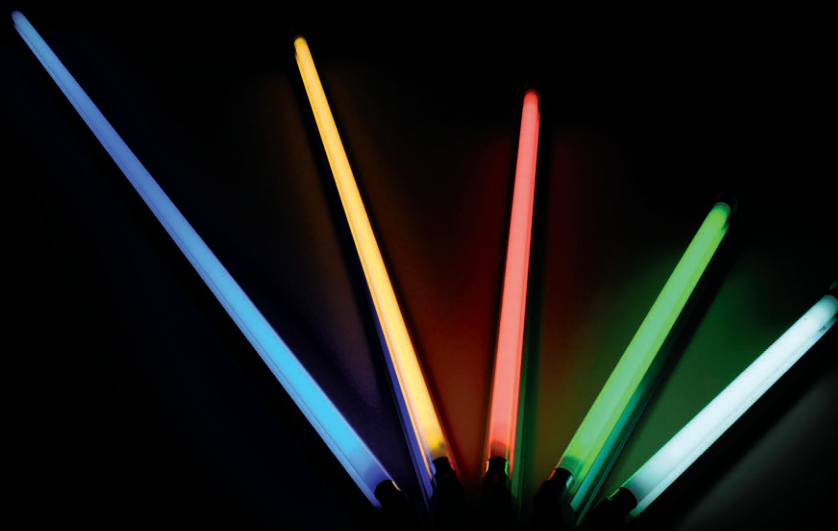

IP20

UNTIL SUPPLY
LAST

COLOUR LIGHTING TUBES T5

Catalogue number	Product category	Type	Watt (W)	Colour	Length (mm)	Packing/Box (pcs)	Energy class
99217177	F	FLUORESCENT TUBE	8	blue	303	1/100	B
99217181	F	FLUORESCENT TUBE	8	green	303	1/100	B
99217182	F	FLUORESCENT TUBE	13	green	531	1/100	B
99217183	F	FLUORESCENT TUBE	21	green	863	1/100	B
99217184	F	FLUORESCENT TUBE	28	green	1160	1/100	B
99217185	F	FLUORESCENT TUBE	8	yellow	303	1/100	B
99217187	F	FLUORESCENT TUBE	21	yellow	863	1/100	B
99217188	F	FLUORESCENT TUBE	28	yellow	1160	1/100	B
99217190	F	FLUORESCENT TUBE	13	red	531	1/100	B
99217191	F	FLUORESCENT TUBE	21	red	863	1/100	B
99217192	F	FLUORESCENT TUBE	28	red	1160	1/100	B





SHINA WITH LED TUBE

SHINA WITH LED TUBES T8 STELLAR



Shina with LED tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
910109LCW	C	9	630	6400	white	612	33	44	1/12	A A++A
910109LW	C	9	630	4000	white	612	33	44	1/12	A A++A
910118LCW	C	18	1260	6400	white	1218	33	44	1/8	A A++A
910118LW	C	18	1260	4000	white	1218	33	44	1/8	A A++A

with LED tubes STELLAR



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

SHINA
910218SHINA EB
910218EB

SHINA

811

LUMINAIRES

IP20

UNTIL SUPPLY
LAST

SHINA

Catalogue number	Product category	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Ballast	Packing/Box (pcs)	Energy class
910218	F	2X18	white	618	89	70	magnetic	1/8	A++B
910218EB	F	2X18	white	690	100	50	electronic	1/8	A++B





LENA-V OM
9LOM260LEDCW
9LOM260LED
9LOM460LEDCW
9LOM460LED
9LOM2120LEDCW
9LOM2120LED



LENA-V BM
9LBM260LEDCW
9LBM260LED
9LBM460LEDCW
9LBM460LED
9LBM2120LEDCW
9LBM2120LED



LENA-V BM/OM with LED Tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9LBM260LEDCW	C	2X9	1170	6400	white	595	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM260LED	C	2X9	1170	4000	white	595	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM460LEDCW	C	4X9	2340	6400	white	595	595	70	1/1	A ⁺ A ⁺⁺ A
9LBM460LED	C	4X9	2340	4000	white	595	595	70	1/1	A ⁺ A ⁺⁺ A
9LBM2120LEDCW	C	2X18	2340	6400	white	1195	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM2120LED	C	2X18	2340	4000	white	1195	295	70	1/1	A ⁺ A ⁺⁺ A
9LOM260LEDCW	C	2X9	1170	6400	white	630	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM260LED	C	2X9	1170	4000	white	630	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM460LEDCW	C	4X9	2340	6400	white	630	630	70	1/1	A ⁺ A ⁺⁺ A
9LOM460LED	C	4X9	2340	4000	white	630	630	70	1/1	A ⁺ A ⁺⁺ A
9LOM2120LEDCW	C	2X18	2340	6400	white	1230	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM2120LED	C	2X18	2340	4000	white	1230	330	70	1/1	A ⁺ A ⁺⁺ A


with LED tubes STELLAR



Body: white powder painted steel | Reflector: aluminium mirror double parabolic grid - type V | BM - recessed mounted luminaire | OM - surface mounted luminaire | Light source: LED tubes



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

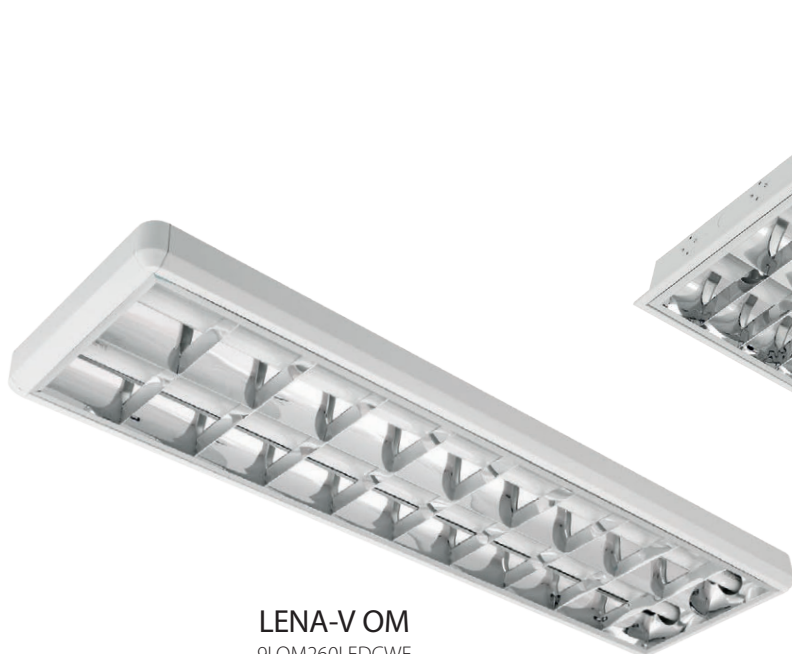

LENA-V OM

9LOM260LEDCWE
9LOM260LEDWE
9LOM460LEDCWE
9LOM460LEDWE
9LOM2120LEDCWE
9LOM2120LEDWE



LENA-V BM

9LBM260LEDCWE
9LBM260LEDWE
9LBM460LEDCWE
9LBM460LEDWE
9LBM2120LEDCWE
9LBM2120LEDWE



IP21

LENA-V BM/OM with LED Tubes T8 and emergency kit

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9LBM260LEDCWE	C	2X9	1170	6400K	white	595	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM260LEDWE	C	2X9	1170	4000K	white	595	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM460LEDCWE	C	4X9	2340	6400K	white	595	595	70	1/1	A ⁺ A ⁺⁺ A
9LBM460LEDWE	C	4X9	2340	4000K	white	595	595	70	1/1	A ⁺ A ⁺⁺ A
9LBM2120LEDCWE	C	2X18	2340	6400K	white	1195	295	70	1/1	A ⁺ A ⁺⁺ A
9LBM2120LEDWE	C	2X18	2340	4000K	white	1195	295	70	1/1	A ⁺ A ⁺⁺ A
9LOM260LEDCWE	C	2X9	1170	6400K	white	630	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM260LEDWE	C	2X9	1170	4000K	white	630	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM460LEDCWE	C	4X9	2340	6400K	white	630	630	70	1/1	A ⁺ A ⁺⁺ A
9LOM460LEDWE	C	4X9	2340	4000K	white	630	630	70	1/1	A ⁺ A ⁺⁺ A
9LOM2120LEDCWE	C	2X18	2340	6400K	white	1230	330	70	1/1	A ⁺ A ⁺⁺ A
9LOM2120LEDWE	C	2X18	2340	4000K	white	1230	330	70	1/1	A ⁺ A ⁺⁺ A

with LED tubes STELLAR



We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime up to three hours.

Body: white powder painted steel | Reflector: aluminium mirror double parabolic grid - type V | BM - recessed mounted luminaire | OM - surface mounted luminaire | Light source: LED tubes



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VIKI
9VBM214LEDW
9VOM214LEDW



UNTIL SUPPLY
LAST



NEUTRAL
WHITE
4000K

IP21

VIKI luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9VBM214LEDW	F	2X10	recessed	1800	4000	white	595	295	55	1/1	A++A
9VOM214LEDW	F	2X10	surface	1800	4000	white	600	300	55	1/1	A++A

Body: white powder painted steel | Reflector: prismatic lens | Ballast: fixed inside the body | BM - recessed fixture for mounting in suspended ceiling Armstrong type | OM - surface mounted fixture

with LED tubes ELMARK





POLA
9PMBME255LEDCW



POLA
9PMBME255LEDCW

POLA LUMINAIRE WITH LED PLL ELMARK

815

COOL
WHITE
6400K**IP21**UNTIL SUPPLY
LAST

POLA luminaire with LED PLL ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PMBME255LEDCW	F	recessed	2x20	3600	5500	white	595	595	80	1/1	A++A
9PBME255LEDCW	F	recessed	2x20	3700	5500	white	595	595	80	1/1	A++A

with LED PLL ELMARK



LUMINAIRES



PRISMATIC T5

PRISMATIC T5

816

LUMINAIRES

IP21



UNTIL SUPPLY
LAST

PRISMATIC T5

Catalogue number	Product category	Watt (W)	Colour body	Ballast	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PROM235	F	2X35	white	electronic	1500	300	70	1/1	A++B
9PROM249	F	2X49	white	electronic	1500	300	70	1/1	A++B

Body: white powder painted steel | Reflector: prismatic lens | Ballast: fixed inside the body | BM - recessed fixture for mounting in suspended ceiling Armstrong type | OM - surface mounted fixture





PRISMATIC
9PROM214LEDW
9PROM414LEDW



PRISMATIC
9PRBME214LEDW



UNTIL SUPPLY
LAST

PRISMATIC luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Mounting type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PRBME214LEDW	F	2X10	recessed	1700	4000	white	595	295	70	1/1	A++A
9PROM214LEDW	F	2X10	surface	1700	4000	white	608	308	70	1/1	A++A
9PROM414LEDW	F	4X10	surface	3400	4000	white	595	595	70	1/1	A++A

with LED tubes ELMARK





PRISMATIC
9PROME209LEDW
9PROME209LEDCW

PRISMATIC
9PRBME209LEDW
9PRBME209LEDCW
9PRBME218LEDW
9PRBME218LEDCW



UNTIL SUPPLY
LAST

PRISMATIC luminaire with LED tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9PRBME209LEDW	F	2X9	1080	4000K	white	595	295	70	1/1	A ⁺ A ⁺⁺ →A
9PRBME209LEDCW	F	2X9	1080	6400K	white	595	295	70	1/1	A ⁺ A ⁺⁺ →A
9PRBME218LEDW	F	2X18	2160	4000K	white	1195	295	70	1/1	A ⁺ A ⁺⁺ →A
9PRBME218LEDCW	F	2X18	2160	6400K	white	1195	295	70	1/1	A ⁺ A ⁺⁺ →A
9PROME209LEDW	F	2X9	1080	4000K	white	608	308	70	1/1	A ⁺ A ⁺⁺ →A
9PROME209LEDCW	F	2X9	1080	6400K	white	608	308	70	1/1	A ⁺ A ⁺⁺ →A


with LED tubes STELLAR



**CAB-20**

920LED011

920LED111

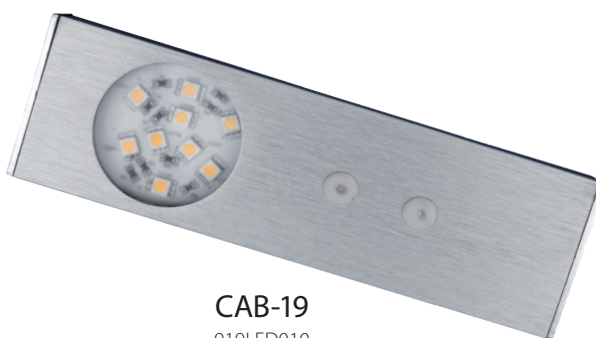**CAB-19**

919LED010

919LED110

**IP20**UNTIL SUPPLY
LAST**CAB**

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
920LED011	F	12	1050	4000	grey	500	42	15	1/60	A++A
920LED111	F	12	1050	2700	grey	500	42	15	1/60	A++A
919LED010	F	2,8	185	4000	grey	160	50	9	1/10	A++A
919LED110	F	2,8	185	2700	grey	160	50	9	1/10	A++A


Body: Aluminium | Diffuser: PMMA | Sensor: NO | w/o driver | Light source: Epistar | Assemble: Surface Mounted

Starting time: <0.01s | With integrated door sensor(CAB-19) - The lamp will switch on when the door is open and switch off when the door is closed. Reaction distance is 50mm - 100mm. | w/o driver

3+0
standard
+extended
3 YEAR TOTAL
WARRANTY



CAB-11
911LED04
911LED14

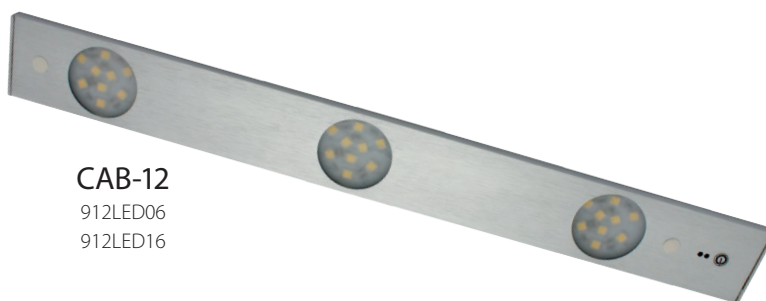

CAB-12
912LED06
912LED16

CAB

820

LUMINAIRES



IP20




UNTIL SUPPLY
LAST

CAB

Catalogue number	Product category	Watt (W)	Lumen (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
911LED04	F	3,5	270	4000	grey	450	23	7	1/10	A++A
911LED14	F	3,5	270	2700	grey	450	23	7	1/10	A++A
912LED06	F	7	480	4000	grey	450	50	9	1/10	A++A
912LED16	F	7	480	2700	grey	450	50	9	1/10	A++A

Body: Aluminium | **Diffuser:** PMMA | **With integrated motion sensor** - The lamp will switch on when you move your hand in front of the sensor, and switch off when you move your hands again. | w/o driver | **Light source:** Epistar | **Assemble:** Surface Mounted | **Starting time:** <0.01s





CAB-13
913LED11



CAB-14
914LED02
914LED12



CAB-15
915LED03
915LED13



CAB-16
916LED05
916LED15



IP20



UNTIL SUPPLY
LAST

CAB

Catalogue number	Product category	Watt (W)	Voltage (V)	Lumen (lm)	Colour temp. (K)	Colour body	Beam angle	Length (mm)	Width (mm)	Height (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
914LED12	F	2,4	12 DC	210	2700	silver	120°	57	57	10	-	1/100	A++A
915LED03	F	1,8	12 DC	160	4000	silver	120°	57	57	10	-	1/100	A++A
915LED13	F	1,8	12 DC	160	2700	silver	120°	57	57	10	-	1/100	A++A
916LED05	F	1	12 DC	90	4000	chrome	120°	52	52	10	-	1/100	A++A
916LED15	F	1	12 DC	90	2700	chrome	120°	52	52	10	-	1/100	A++A



JUNCTION BOX FOR CAB-18

3 mouths with 10 cm wire - **99LED456**

6 mouths with 10 cm wire - **99LED457**

12 mouths with 10 cm wire - **99LED458**

Body: ABS | Diffuser: PC | Sensor: NO | w/o driver | Light source: Epistar | Assemble: Surface Mounted | Starting time: <0.01s





CAB-08
908508
908521



CAB-01A
902521
902506

CAB

822

LUMINAIRES

IP21



UNTIL SUPPLY
LAST

CAB

Catalogue number	Product category	Model	Watt (W)	Colour body	Body	Length (mm)	Width (mm)	Height (mm)	Ballast	Packing/Box (pcs)	Energy class
9A01506	F	CAB-01A	6	white	PVC	268	23	44	electronic	1/40	B A++→B
9A01508	F	CAB-01A	8	white	PVC	345	23	44	electronic	1/40	B A++→B
908508	F	CAB-08	8	grey	Aluminium	365	58	70	electronic	1/16	B A++→B
908521	F	CAB-08	21	grey	Aluminium	935	58	70	electronic	1/12	B A++→B

CAB-07
907521CAB-03
903508
903513
903521

IP21

UNTIL SUPPLY
LAST

CAB

Catalogue number	Product category	Model	Watt (W)	Colour body	Body	Length (mm)	Width (mm)	Height (mm)	Ballast	Packing/Box (pcs)	Energy class
903508	F	CAB-03	8	grey	Aluminium	363	88	45	electronic	1/20	B A++→B
903513	F	CAB-03	13	grey	Aluminium	592	88	45	electronic	1/20	B A++→B
903521	F	CAB-03	21	grey	Aluminium	925	88	45	electronic	1/20	B A++→B
903528	F	CAB-03	28	grey	Aluminium	1225	88	45	electronic	1/20	B A++→B
907521	F	CAB-07	21	grey	Aluminium	895	70	135	electronic	1/12	B A++→B





EL3LED
92EL3LED



XL102
9XL102LED



COOL
WHITE
6400K

IP21



EMERGENCY FIXTURE XL102 / EL3LED

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Discharge time (h)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
92EL3LED	C	EL3LED	5 W	150	6000	3	white	140	140	20	1/1	A++A
9XL102LED	C	XL102LED	30X0,067W	100	6000	5	white	200	54	32	1/60	A++A

XL102LED - Voltage: 127-220V/50HZ | Battery: Lithium 3.7V/1000mAh | Charging: 220V- 12h; 120V- 24h | Light source: SMD 2835 | Two files dimming | Over charge protection | Body: PVC



In case of insufficient quantity in stock for EL3LED, the delivery time after order confirmation will be 45 days, and for XL102 will be 90 days.



XL101
9XL101BLED
9XL101CLED

XL101

826

EMERGENCY LIGHTS



XL101

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL101BLED	C	XL101BLED	18X0,1W	60	6200-6500	white	246	76	41	1/10	A++A
9XL101CLED	C	XL101CLED	24X0,1W	75	6200-6500	white	327	76	43	1/10	A++A



Body: PVC | Diffuser: PVC | Duration time approx 4 hours | Battery: 3,6V / 800mAh Ni-Cd

Note: with stickers



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



XL88
9XL88 LED



XL88
9XL88A LED



IP21



XL88

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Lamp	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL88LED	C	XL88 LED / DOUBLE FACE	3	35	LED	360	150	25	1/10	A++A
9XL88A LED	C	XL88A LED / ONE FACE ONLY	3	35	LED	360	150	25	1/10	A++A

Frame: aluminium | Diffuser: glass | Duration time approx 3 hours | battery: 2,4V / 800mAh Ni-Cd



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



9XL3114



9XL5113



9XL3115



9XL5114

9AL3116
Plasterboard Mounting9AL3117
Plasterboard Mounting

IP21

XL/AL EMERGENCY LIGHT

Catalogue number	Product category	Model	LED Type	Discharge time (h)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XL5113	C	XL5113	6 super bright SMD LED	3	220	260	22	1/20	A++A
9XL5114	C	XL5114	6 super bright SMD LED	3	220	260	22	1/20	A++A
9XL3114	C	XL3114	6 super bright SMD LED	3	220	260	22	1/20	A++A
9XL3115	C	XL3115	6 super bright SMD LED	3	220	260	22	1/20	A++A
9AL3116	C	AL3116 Plasterboard	6 pieces D5 LED	3	380	210	50	1/20	A++A
9AL3117	C	AL3117 Plasterboard	6 pieces D5 LED	3	380	210	50	1/20	A++A

XL Models

Frame: PVC | Diffuser: PVC | Battery: 3,6V/300mAh | Charge time: 8-12h | Conversion time: <0.2sek | Ambient temperature: -10+40°C | With test button

AL Model

Frame: Aluminium alloy | Power: 1,5W | Battery: 1,2V/800mAh | Conversion time: <0.2sek | Ambient temperature: -10+40°C | Mounting: Plasterboard



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BATHROOM



POSEIDON

955POSEIDON12
955POSEIDON18
955POSEIDON24



TRITON

955TRITON7

POSEIDON / TRITON

830

BATHROOM



NEUTRAL
WHITE
4000K

IP44

POSEIDON / TRITON

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Width/Diameter (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955TRITON7	C	7	576	4000	Chrome	60	480	125	1/20	A++>A
955POSEIDON12	C	12	960	4000	Chrome	60	420	40	1/10	A++>A
955POSEIDON18	C	18	1440	4000	Chrome	60	655	40	1/10	A++>A
955POSEIDON24	C	24	1920	4000	Chrome	60	965	40	1/10	A++>A

Body: aluminium alloy | LED Bath Light.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MIRROR LIGHT

95IP4411/2
over cabinet

MIRROR LIGHT

95IP4411
95IP4414

MIRROR LIGHT

95IP4413



MIRROR LIGHT

95IP4412



IP44



LED MIRROR LIGHT

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95IP4411	C	8	504	4000	120°	400	121	42	1/20	A++A
95IP4414	C	8	504	2700	120°	400	121	42	1/20	A++A
95IP4411/2	C	8	504	4000	120°	400	121	42	1/20	A++A
95IP4412	C	15	1200	4000	133°	600	65	53	1/12	A++A
95IP4413	C	20	1600	4000	133°	900	65	53	1/12	A++A

Body: Aluminium + PC | Light source: SMD 2835



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEXA
955ALEXA10/AB



ALEXA
955ALEXA10/CH

ALEXA

BATHROOM



ALEXA

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
955ALEXA10/AB	C	10	600	4000	Antique brass	400	50	1/1	A++A
955ALEXA10/CH	C	10	600	4000	Chrome	400	50	1/1	A++A

Body: Metal



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RODA
95IP4403



NILOS
95IP4405



OCEAN
95IP4409



OCEAN
95IP4410

IP44



UNTIL SUPPLY
LAST

MIRROR LIGHT

Catalogue number	Product category	Description	Body	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95IP4403	F	Wall lamp	Metal and glass	Satin nickel	275	70	120	1 x E14	1/1	A++A
95IP4405	F	Wall lamp	Metal and glass	Chrome	310	80	80	1 x E14	1/1	A++A
95IP4409	F	Wall lamp	Metal and glass	Chrome	55	421	67	1 x T5 / 8W	1/1	A++A
95IP4410	F	Wall lamp	Metal and glass	Chrome	55	650	67	1 x T5 / 14W	1/1	A++A



2+0
standard
+extended
2 YEAR TOTAL
WARRANTY



LED PANEL ROUND IP44

99LED609IP44
99LED609IP44CW

LED PANEL ROUND IP44

99LED611IP44
99LED611IP44CW

LED PANEL ROUND IP44

99LED617IP44
99LED617IP44CW

LED PANEL ROUND IP44

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP44	99LED609IP44E	C	5	400	4000	white	90	21	40	A++A
99LED609IP44CW	99LED609IP44CWE	C	5	400	6500	white	90	21	40	A++A
99LED611IP44	99LED611IP44E	C	12	960	4000	white	175	21	20	A++A
99LED611IP44CW	99LED611IP44CWE	C	12	960	6500	white	175	21	20	A++A
99LED617IP44	99LED617IP44E	C	18	1440	4000	white	225	21	20	A++A
99LED617IP44CW	99LED617IP44CWE	C	18	1440	6500	white	225	21	20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: aluminium | Light source: SMD 2835 | Recessed mounted luminaire | Beam angle: 120° | Driver: Isolated

Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WATERPROOF LED PANEL ROUND

99LED609IP65
99LED609IP65CW



WATERPROOF LED PANEL ROUND

99LED611IP65
99LED611IP65CW



WATERPROOF LED PANEL ROUND

99LED617IP65
99LED617IP65CW



IP65



WATERPROOF LED PANEL ROUND

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
99LED609IP65	99LED609IP65E	C	5	400	4000	white	90	27	1/40	A++A
99LED609IP65CW	99LED609IP65CWE	C	5	400	6500	white	90	27	1/40	A++A
99LED611IP65	99LED611IP65E	C	10	800	4000	white	150	27	1/40	A++A
99LED611IP65CW	99LED611IP65CWE	C	10	800	6500	white	150	27	1/40	A++A
99LED617IP65	99LED617IP65E	C	18	1440	4000	white	225	27	1/20	A++A
99LED617IP65CW	99LED617IP65CWE	C	18	1440	6500	white	225	27	1/20	A++A



Emergency kit with a possibility for work in an emergency regime more than two hours.

Body: polycarbonate (pc) | Reflector: polycarbonate (pc) | Light source: Epistar | Starting time: <0.5s | Power factor: λ>0.8

Easy installation due to handy clips | Recessed mounted luminaire.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ELR627
92627/W



ELR627
92627/SN



ELR627
92627/CH



ELR627
92627/AB



IP44

ELR627 - BATHROOM, IP44

Catalogue number	Product category	Model	Diameter (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92627/W	C	ELR627	90	33	60	white	1/100	A++ E
92627/SN	C	ELR627	90	33	60	satin nickel	1/100	A++ E
92627/CH	C	ELR627	90	33	60	chrome	1/100	A++ E
92627/AB	C	ELR627	90	33	60	antique brass	1/100	A++ E

Body: steel | Diffuser: glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SA-044
92044/G



SA-144
92144/CH



SA-144
92144/RAB

IP44



UNTIL SUPPLY
LAST

SA

Catalogue number	Product category	Model	Diameter (mm)	Length (mm)	Height (mm)	Diameter1 (mm)	Colour body	Packing/Box (pcs)	Energy class
92144/CH	F	SA-144	-	85	48	72	chrome	1/50	A ⁺ →E
92144/RAB	F	SA-144	-	85	48	72	red antique brass	1/50	A ⁺ →E
92044/G	F	SA-044	80	-	37	71	gold	1/50	A ⁺ →E

Body: steel | Diffuser: glass | Ring: aluminium alloy

With the purchase of additional lampholder GU10, spotlights can be used with 230V GU10 lamps.

