

ELMARK HOLDING SE United Kingdom



CATALOGUE 2020



ELMARK[®]
The Brand of Electricity



ACOUSTIC LED RINGS
LUMINAIRES
PAGE 798



LED RINGS
LUMINAIRES
PAGE 799



LED PROFILES S48
LUMINAIRES
PAGE 801



LED PROFILES S77
LUMINAIRES
PAGE 806



RAINBOW LED SMD
LUMINAIRES
PAGE 807



LENA-V BM/
LUMINAIRES
PAGE 812



XL101
EMERGENCY LIGHTS
PAGE 826



XL3114
EMERGENCY LIGHTS
PAGE 828



TRITON
BATHROOM
PAGE 830



LED MIRROR LIGHT
BATHROOM
PAGE 831



LED PANEL ROUND IP44
BATHROOM
PAGE 834



WATERPROOF LED PANEL
BATHROOM
PAGE 835



ELR627
BATHROOM
PAGE 836

OUTDOOR LIGHTING



BELT LIGHT
GARDEN
PAGE 839



JOSH
GARDEN
PAGE 841



ERIK
GARDEN
PAGE 844




GOLIA
GARDEN
PAGE 849



ANNA
GARDEN
PAGE 850



GLOBE 250
GARDEN
PAGE 852



GRF506 LED
GARDEN
PAGE 856



GABRI
GARDEN
PAGE 858



CARLO DECO
GARDEN
PAGE 859



CARLO
GARDEN
PAGE 860



SAURO
GARDEN
PAGE 862



GRF965
GARDEN
PAGE 865



PMMA OPAL
GARDEN
PAGE 868



NINA 150
GARDEN
PAGE 869



LETI 100GR
GARDEN
PAGE 870



LED WALL FIXTURES
GARDEN
PAGE 872



LORENZA 190
GARDEN
PAGE 873



GRF9617 LED
GARDEN
PAGE 876



WALL LAMP
GARDEN
PAGE 877



STUCCHI
GARDEN
PAGE 880



BRICE
GARDEN
PAGE 883



LED BULKHEAD LAMP
GARDEN
PAGE 884



MARTA 90-2
FACADE AND GROUND
PAGE 888



LIVIA 160
FACADE AND GROUND
PAGE 890



LINEAR
FACADE AND GROUND
PAGE 893



SOLAR LED WALL LIGHTS
FACADE AND GROUND
PAGE 895



SOLAR FIXTURE & SENSOR
FACADE AND GROUND
PAGE 896




MINI TOMMY EL
FACADE AND GROUND
PAGE 900



SOLAR TORCH LIGHT
FACADE AND GROUND
PAGE 903



SOLAR GROUND LIGHT
FACADE AND GROUND
PAGE 904



SOLAR WALL
FACADE AND GROUND
PAGE 907



SOLAR WALL
FACADE AND GROUND
PAGE 908



CECI
FACADE AND GROUND
PAGE 910



WADE FIXTURE IP65
LUMINAIRES
PAGE 914



**BELLA SMD2835
LUMINAIRES**
PAGE 916



**BELLA LED T8
LUMINAIRES**
PAGE 918



**HELIOS SMD
FLOODLIGHTS**
PAGE 922



**SIRIUS SMD
FLOODLIGHTS**
PAGE 927



**STADIUM FLOOD LIGHTS
FLOODLIGHTS**
PAGE 929



**LED WORK FLOODLIGHTS
FLOODLIGHTS**
PAGE 931



**STREET SMD
ROAD LIGHTS**
PAGE 937



**SOLAR LED & SENSOR
ROAD LIGHTS**
PAGE 938



**LUCKY SMD
HIGH BAYS**
PAGE 939



**VECA SMD ECO
HIGH BAYS**
PAGE 940

LAMPS AND COMPONENTS



**LED VINTAGE LAMP
LAMPS**
PAGE 949



**LED VINTAGE LAMP
LAMPS**
PAGE 952



**LED VINTAGE LAMP
LAMPS**
PAGE 954



**LED CANDLE C37
LAMPS**
PAGE 957



**LED PEAR A60
LAMPS**
PAGE 960



OUTDOOR



BELT LIGHT

961527



IP44

BELT LIGHT

Catalogue number	Product category	Cable length (m)	Cable specification	Lamp holder	QTY of lamp holder	IP	Packing/Box (pcs)	Energy class
961527	C	5	H05RN-F 2x1.0mm ²	E27	15	44	1/5	A++  E



Length 5m / 15 lamps holders



Voltage: 220-240V AC | Connectors type: 3 pcs male/female | Lamps not included

2+0
standard
+extendedYEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JOSH
96402WD/BK



JOSH
96403P/BK



JOSH
96404MF/BK



JOSH
96405MF/BK

IP44

JOSH

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96402WD/BK	C	Wall lantern	Matt black	185	240	450	1 x E27	1/6	A++ E
96403P/BK	C	Hanging lantern	Matt black	185	-	290	1 x E27	1/6	A++ E
96404MF/BK	C	Lantern floor post	Matt black	185	-	460	1 x E27	1/6	A++ E
96405MF/BK	C	Lantern floor post	Matt black	185	-	2000	1 x E27	1/20	A++ E



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Height: 600 - 93SP60BL
Height: 800 - 93SP80BL
Height: 1000 - 93SP100BL
Height: 1200 - 93SP120BL

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



JOSH
96402WD/AB



JOSH
96403P/AB



JOSH
96404MF/AB



JOSH
96405MF/AB

IP44

JOSH

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96402WD/AB	C	Wall lantern	Antique brass	185	240	450	1 x E27	1/6	A ⁺⁺ →E
96403P/AB	C	Hanging lantern	Antique brass	185	-	290	1 x E27	1/6	A ⁺⁺ →E
96404MF/AB	C	Lantern floor post	Antique brass	185	-	460	1 x E27	1/6	A ⁺⁺ →E
96405MF/AB	C	Lantern floor post	Antique brass	185	-	2000	1 x E27	1/20	A ⁺⁺ →E



SP60 METAL POLE
 Colour: black
 Size (mm):
 Diameter 60 x Base Ø 145
 Height: 600 - 93SP60BL
 Height: 800 - 93SP80BL
 Height: 1000 - 93SP100BL
 Height: 1200 - 93SP120BL

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEK
96301WD/BK



ALEK
96301WU/BK



ALEK
96305F/BK



ALEK
96303P/BK



ALEK
96304MF/BK



IP44

ALEK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96301WD/BK	C	Wall lantern	Matt black	150	175	295	1 x E27	1/6	A++→E
96301WU/BK	C	Wall lantern	Matt black	150	175	365	1 x E27	1/6	A++→E
96303P/BK	C	Hanging lantern	Matt black	150	150	230	1 x E27	1/6	A++→E
96304MF/BK	C	Lantern floor post	Matt black	150	150	370	1 x E27	1/6	A++→E
96305F/BK	C	Lantern floor post	Matt black	150	150	830	1 x E27	1/6	A++→E

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALEK
96301WD/BRB



ALEK
96301WU/BRB



ALEK
96305F/BRB



ALEK
96303P/BRB



ALEK
96304MF/BR

IP44

ALEK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96301WD/BRB	C	Wall lantern	Antique copper	150	175	295	1 x E27	1/6	A++→E
96301WU/BRB	C	Wall lantern	Antique copper	150	175	365	1 x E27	1/6	A++→E
96303P/BRB	C	Hanging lantern	Antique copper	150	150	230	1 x E27	1/6	A++→E
96304MF/BRB	C	Lantern floor post	Antique copper	150	150	370	1 x E27	1/6	A++→E
96305F/BRB	C	Lantern floor post	Antique copper	150	150	830	1 x E27	1/6	A++→E

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ERIK
96101WU/BK



ERIK
96102WD/BK



ERIK
96105F/BK



ERIK
96103P/BK



ERIK
96104MF/BK

IP44

ERIK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96101WU/BK	C	Wall lantern	Matt black	155	170	325	1 x E27	1/6	A++→E
96102WD/BK	C	Wall lantern	Matt black	155	170	285	1 x E27	1/6	A++→E
96103P/BK	C	Hanging lantern	Matt black	155	-	300	1 x E27	1/6	A++→E
96104MF/BK	C	Lantern floor post	Matt black	155	-	370	1 x E27	1/6	A++→E
96105F/BK	C	Lantern floor post	Matt black	155	-	775	1 x E27	1/6	A++→E

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ERIK
96101WU/AB



ERIK
96102WD/AB



ERIK
96105F/AB



ERIK
96103P/AB



ERIK
96104MF/AB

IP44

ERIK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96101WU/AB	C	Wall lantern	Antique brass	155	170	325	1 x E27	1/6	A ⁺⁺ →E
96102WD/AB	C	Wall lantern	Antique brass	155	170	285	1 x E27	1/6	A ⁺⁺ →E
96103P/AB	C	Hanging lantern	Antique brass	155	-	300	1 x E27	1/6	A ⁺⁺ →E
96104MF/AB	C	Lantern floor post	Antique brass	155	-	370	1 x E27	1/6	A ⁺⁺ →E
96105F/AB	C	Lantern floor post	Antique brass	155	-	775	1 x E27	1/6	A ⁺⁺ →E

Body: Aluminium with glass



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NICK
96501WU/BK



NICK
96504MF/BK



NICK
96503P/BK



NICK
96505F/BK



IP44

NICK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96501WU/BK	C	Wall lantern	Matt black	210	175	230	1 x E27	1/12	A++→E
96503P/BK	C	Hanging lantern	Matt black	175	175	220	1 x E27	1/12	A++→E
96504MF/BK	C	Lantern floor post	Matt black	175	175	240	1 x E27	1/12	A++→E
96505F/BK	C	Lantern floor post	Matt black	175	175	720	1 x E27	1/6	A++→E

Body: Aluminium with PVC



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NICK
96501WU/AB



NICK
96504MF/AB



NICK
96503P/AB



NICK
96505F/AB



IP44

NICK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96501WU/AB	C	Wall lantern	Antique brass	210	175	230	1 x E27	1/12	A++→E
96503P/AB	C	Hanging lantern	Antique brass	175	175	220	1 x E27	1/12	A++→E
96504MF/AB	C	Lantern floor post	Antique brass	175	175	240	1 x E27	1/12	A++→E
96505F/AB	C	Lantern floor post	Antique brass	175	175	720	1 x E27	1/6	A++→E

Body: Aluminium with PVC



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MARK
96202WD/BRB



MARK
96201WU/BRB



MARK
96204MF/BRB



MARK
96202WD/BK



MARK
96201WU/BK



UNTIL SUPPLY
LAST

IP44

MARK

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96202WD/BRB	F	Wall lantern	Antique copper	200	230	420	1 x E27	1/6	A++→E
96201WU/BRB	F	Wall lantern	Antique copper	200	230	420	1 x E27	1/6	A++→E
96204MF/BRB	F	Lantern floor post	Antique copper	200	-	490	1 x E27	1/6	A++→E
96202WD/BK	F	Wall lantern	Matt black	200	230	420	1 x E27	1/6	A++→E
96201WU/BK	F	Wall lantern	Matt black	200	230	420	1 x E27	1/6	A++→E

Body: Aluminium with glass | Lamps not included





IESSE
96IESSEWL/BL



GOLIA
96GOLIAP/BL



GOLIA
96GOLIAWL/BL



IP55

Resin

GOLIA/ IESSE

Catalogue number	Product category	Description	Colour	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96GOLIAWL/BL	C	Wall lantern	Black	300	450	1xE27	1/12	A++→E
96GOLIAP/BL	C	Hanging lantern	Black	230	800	1xE27	1/12	A++→E
96IESSEWL/BL	C	Wall half lantern	Black	220	350	1xE27	1/16	A++→E

Lantern body: Resin with clear glass | UV resistant | Lamp not included



Recommended bulbs:

99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K

99LED773D LED Vintage 8W 2700K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ANNA
96120WU/BL



ANNA
96120MF/BL



ANNA
96120P/BL



ANNA 6W
96120F/BL

IP55

Resin



SMALL SIZES GARDEN LANTERN ANNA

Catalogue number	Product category	Model	Lamp included Colour		Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96120WU/BL	C	Wall lantern- UP	no	black	275	450	E27	1/18	A++E
96120P/BL	C	Wall lantern- Hanging	no	black	220	800	E27	1/18	A++E
96120MF/BL	C	Lantern floor post	no	black	130	385	E27	1/18	A++E
96120F/BL	C	Lantern floor post	yes	black	150/50/220	1100	E27	1	A++E

Lantern body: Resin with glass | UV resistant | Lamp not included

96120F/BL: 6W bulb included; 800 lm; 4000K

Post lantern body: steel+resin | Anticorrosion | UV-rays stabilized | Not affected by chemical fertilizers



Recommended bulbs:

99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K

99LED773D LED Vintage 8W 2700K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



50193
9350193AC



50023
9350023AC



50313
9350313AC
9350313WH



50073
9350073WH



50183
9350183WH
9350183AC



IP44

UNTIL SUPPLY
LAST

LANTERN

Catalogue number	Product category	Model	Colour	Width (mm)	Length (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9350023AC	F	50023 HANGING	oxidated copper	255	340	255	1/12	A ⁺⁺ →E
9350183WH	F	50183 HANGING	white	165	340	165	1/12	A ⁺⁺ →E
9350183AC	F	50183 HANGING	oxidated copper	165	340	165	1/12	A ⁺⁺ →E
9350073WH	F	50073 HANGING	white	165	340	200	1/12	A ⁺⁺ →E
9350193AC	F	50193 HANGING	oxidated copper	150	330	150	1/12	A ⁺⁺ →E
9350313AC	F	50313 HANGING	oxidated copper	195	330	195	1/12	A ⁺⁺ →E
9350313WH	F	50313 HANGING	white	195	330	195	1/12	A ⁺⁺ →E

Body: aluminium | Diffuser: glass | Colour: white - 935063WH | Colour: oxidized copper - 935063AC | Lamps not included





GLOBE 250
96G250WL/BL



GLOBE 250
96G250P/BL



GLOBE 250
96G250MF/BL



IP55 Resin

GLOBE 250

Catalogue number	Product category	Description	Colour	Width/ Diameter (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96G250WL/BL	C	Wall lamp	Black	300	360	1xE27	1/36	A++→E
96G250MF/BL	C	Floor lamp	Black	250	350	1xE27	1/36	A++→E
96G250P/BL	C	Hanging lamp	Black	250	700	1xE27	1/36	A++→E

Lantern body: Resin with clear glass | UV resistant | Lamp not included



Recommended bulbs:
99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K
99LED773D LED Vintage 8W 2700K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF157 LED
96LEDW157



GRF157 LED
96LEDP15780



GRF968 LED
968LEDP500



UNTIL SUPPLY
LAST

GRF157 LED / GRF968 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW157	F	10	800	4000	dark gray	250	90	80	1/9	A++A
96LEDP15780	F	10	800	4000	dark gray	800		100	1/9	A++A
968LEDP500	F	6	480	4000-4300	dark grey	500	186	183	1/4	A++A

Material: Alu+PC | Chip: 8 pcs Osram SMD3030





GRF206 LED
96LEDW206
96LEDW206W



GRF206 LED
96LEDP20678
96LEDP20678W

GRF206 LED

GARDEN

854




GRF206 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW206	C	10	800	4000	graphite black	164	80	263	1/16	A++A
96LEDP20678	C	10	800	4000	graphite black	154	110	780	1/6	A++A
96LEDW206WW	C	10	800	3000	graphite black	164	80	263	1/16	A++A
96LEDP20678WW	C	10	800	3000	graphite black	154	110	780	1/6	A++A

Material: Alu+PC | Chip: Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

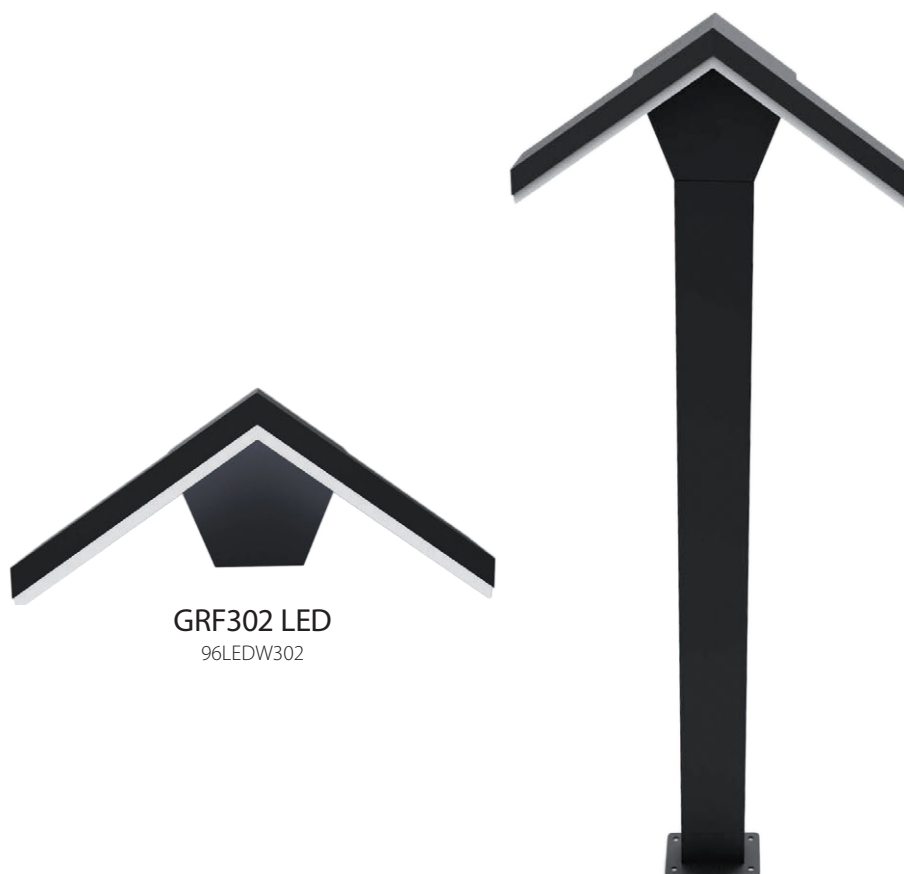

GRF302 LED
96LEDW302

GRF302 LED
96LEDP30278



NEUTRAL
WHITE
4000K

IP54



GRF302 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW302	C	10	800	4000	graphite black	82	284	126	1/12	A++A
96LEDP30278	C	10	800	4000	graphite black	82	284	780	1/6	A++A

Material: Alu+PC | Chip: Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF506 LED
96LEDW506



GRF506 LED
96LEDP50678

GRF506 LED

GARDEN



GRF506 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW506	C	10	800	4000	graphite black	157	92	83	1/16	A++A
96LEDP50678	C	10	800	4000	graphite black	157	92	787	1/6	A++A

Material: Alu+PC | Chip: Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF507 LED
96LEDW507



GRF507 LED
96LEDP50778



NEUTRAL
WHITE
4000K

IP54



UNTIL SUPPLY
LAST

GRF507 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96LEDW507	F	10	800	4000	graphite black	160	112	170	1/12	A++A
96LEDP50778	F	10	800	4000	graphite black	160	82	780	1/6	A++A

Material: Alu+PC | Chip: Epistar 2835 SMD | 45PCS 2835 SMD, 10W, 800lm





LUCIA
95LUCIA/BL



GABRI
96GABRI/BL



BEPPE 50W
96BEPPE40/BL

IP66

IP65

Resin

GABRI / LUCIA / BEPPE 50W

Catalogue number	Product category	Model	Lamp included	Colour body	Body material	IP Rating	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GABRI/BL	C	Bollard	no	black	Resin	IP 66	750		750	1/24	A++C
95LUCIA/BL	C	Bulkhead	no	black	Resin	IP 66	300	175	255	1/16	A++C
96BEPPE40/BL	C	Post	yes	black	Resin	IP 65	3065		3065	1/1	A++C

96GABRI/BL: UV resistant | Lamp not included

96BEPPE40/BL: UV resistant | Lamp included 50 W / 5000 lm / 4000K



Recommended bulbs for 96GABRI/BL and 95LUCIA/BL:

99LED583 LED PEAR A60 8W 2700K | 99LED584 LED PEAR A60 8W 6400K | 99LED794 LED PEAR A60 8W 6400K

99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO DECO
95CARLOWLD/BL



CARLO DECO
95CARLO800D/BL



CARLO DECO
95CARLO400D/BL



NEUTRAL
WHITE
4000K

IP55


Resin



CARLO DECO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800D/BL	C	3.5	400	4000	Black	100	800	1/6	A ⁺ A ⁺⁺ A
95CARLO400D/BL	C	3.5	400	4000	Black	100	400	1/12	A ⁺ A ⁺⁺ A
95CARLOWLD/BL	C	3.5	400	4000	Black	110	260	1/20	A ⁺ A ⁺⁺ A

Body: Resin with clear glass | UV resistant | Lamp holder: G10 | Lamp included



The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | 99XLED730 GU10 LED SMD 7W 2700K | 99XLED796 GU10 LED SMD 7W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO
95CARLOWL/BL



CARLO
95CARLO800/BL



CARLO
95CARLO400/BL



NEUTRAL
WHITE
4000K

IP55

Resin

CARLO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800/BL	C	3.5	400	4000	Black	100	800	1/6	A ⁺ A ⁺⁺ A
95CARLO400/BL	C	3.5	400	4000	Black	100	400	1/12	A ⁺ A ⁺⁺ A
95CARLOWL/BL	C	3.5	400	4000	Black	110	260	1/20	A ⁺ A ⁺⁺ A

Body: Resin with clear glass | UV resistant | Lamp holder: G10 | Lamp included



The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | 99XLED730 GU10 LED SMD 7W 2700K | 99XLED796 GU10 LED SMD 7W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



CARLO
95CARLOWL/GR



CARLO
95CARLO800/GR



CARLO
95CARLO400/GR



NEUTRAL
WHITE
4000K

IP55

Resin



CARLO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95CARLO800/GR	C	3.5	400	4000	Grey	100	800	1/6	A ⁺ A ⁺⁺ A
95CARLO400/GR	C	3.5	400	4000	Grey	100	400	1/12	A ⁺ A ⁺⁺ A
95CARLOWL/GR	C	3.5	400	4000	Grey	110	260	1/20	A ⁺ A ⁺⁺ A

Body: Resin with clear glass | UV resistant | Lamp holder: G10 | Lamp included



The product CARLO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED729 GU10 LED SMD 7W 4000K | **99XLED730** GU10 LED SMD 7W 2700K | **99XLED796** GU10 LED SMD 7W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ESTER
95ESTER800/BL



ESTER
95ESTER500/BL



ESTER
95ESTERWL/BL



SAURO
95SAURO800/BL



NEUTRAL
WHITE
4000K

IP55

Resin



ESTER/ SAURO

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ESTER800/BL	C	10	1200	4000	Black	126	126	800	1/6	A ⁺ A ⁺⁺ A
95ESTER500/BL	C	10	1200	4000	Black	126	126	480	1/12	A ⁺ A ⁺⁺ A
95ESTERWL/BL	C	10	1200	4000	Black	126	165	126	1/18	A ⁺ A ⁺⁺ A
95SAURO800/BL	C	10	1200	4000	Black	150		800	1/6	A ⁺ A ⁺⁺ A

Body: Resin with clear glass | UV resistant | Lamp holder: GX53 | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



ESTER
95ESTER800/GR



ESTER
95ESTER500/GR



ESTER
95ESTERWL/GR



NEUTRAL
WHITE
4000K

IP55

Resin



ESTER

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length/ Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95ESTER800/GR	C	10	1200	4000	Grey	126	126	800	1/6	A ⁺ A ⁺⁺ A
95ESTER500/GR	C	10	1200	4000	Grey	126	126	480	1/12	A ⁺ A ⁺⁺ A
95ESTERWL/GR	C	10	1200	4000	Grey	126	165	126	1/18	A ⁺ A ⁺⁺ A

Body: Resin with clear glass | UV resistant | Lamp holder: GX53 | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



GRF966
966W250



GRF966
966P300



GRF966
966P500



GRF966
966P800



IP65

GRF966

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
966W250	C	GRF966-W	MAX 18W	dark grey	250	72	107	1/16	A++→C
966P300	C	GRF966-30	MAX 18W	dark grey	300	72	72	1/9	A++→C
966P500	C	GRF966-50	MAX 18W	dark grey	500	72	72	1/9	A++→C
966P800	C	GRF966-80	MAX 18W	dark grey	800	72	72	1/9	A++→C

Body: aluminium | Diffuser: polycarbonate (PC) | Operating temperature: -20°C÷+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



IP65



GRF965

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
965W200	C	GRF965	MAX 23W	dark grey	200	175	190	1/8	A++→C
965P300	C	GRF965-30	MAX 23W	dark grey	300	175	-	1/8	A++→C
965P500	C	GRF965-50	MAX 23W	dark grey	500	175	-	1/4	A++→C
965P800	C	GRF965-80	MAX 23W	dark grey	800	175	-	1/4	A++→C

Body: aluminium | Diffuser: polycarbonate (PC) | Operating temperature: -20°C÷+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HECTORW1
96100006



HECTORW2
96100010



UNTIL SUPPLY
LAST

IP44

HECTOR / TARA

Catalogue number	Product category	Model	Watt (W)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96100006	F	Wall	max 11W	satin nickel	377	80	-	1/20	A++A
96100010	F	Wall	max 11W	satin nickel	390	80	145	1/12	A++A

Body: stainless steel | Diffuser: ABS

~230V

50/60 Hz

E27

800 800 2,5mm

→

IP 44

RoHS

⚡

F

CE

2+0 standard +extended

2 YEAR TOTAL WARRANTY



PMMA CLEAR
96400023A60LED



PMMA CLEAR
96400024G95LED
96400025G95LED



PMMA CLEAR
9640002730LED
9640002740LED



NEUTRAL
WHITE
4000K

IP65



PMMA CLEAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96400023A60LED	C	18	1700	4000	clear	200	100	210	1/16	A ⁺ A ⁺⁺ →A
96400024G95LED	C	20	1800	4000	clear	250	125	260	1/12	A ⁺ A ⁺⁺ →A
96400025G95LED	C	20	1800	4000	clear	300	145	310	1/6	A ⁺ A ⁺⁺ →A
9640002730LED	C	30	2700	4000	clear	400	220	410	1/2	A ⁺ A ⁺⁺ →A
9640002740LED	C	40	3600	4000	clear	400	220	410	1/2	A ⁺ A ⁺⁺ →A

Diffuser: PMMA (polymethyl methacrylate) | Lamp holder: E27 | Mounting: Metal pole φ60



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base Ø 145
Height: 600 - 93SP60BL
Height: 800 - 93SP80BL
Height: 1000 - 93SP100BL
Height: 1200 - 93SP120BL



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



PMMA OPAL

96300016
96300017
96300018
96300019



PMMA CLEAR

96400023
96400024
96400025
96400027



IP65

PMMA OPAL / CLEAR

Catalogue number	Product category	Watt (W)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96300016	C	max 11W	opal	200	100	210	1/16	A++B
96300017	C	max 15W	opal	250	125	260	1/12	A++B
96300018	C	max 20W	opal	300	145	310	1/6	A++B
96300019	C	max 40W	opal	400	220	410	1/2	A++B
96400023	C	max 11W	clear	200	100	210	1/16	A++B
96400024	C	max 15W	clear	250	125	260	1/12	A++B
96400025	C	max 20W	clear	300	145	310	1/6	A++B
96400027	C	max 40W	clear	400	220	410	1/2	A++B

Diffuser: PMMA (polymethyl methacrilate) | Lamp holder: E27 | Mounting: Metal pole $\phi 60$ | Lamps not included



SP60 METAL POLE
Colour: black
Size (mm):
Diameter 60 x Base ϕ 145
Height: 600 - 93SP60BL
Height: 800 - 93SP80BL
Height: 1000 - 93SP100BL
Height: 1200 - 93SP120BL



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



NINA 150

96NINA150/BL



NINA 150

96NINA150/GR

NEUTRAL
WHITE
4000K

IP55


Resin



NINA 150

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96NINA150/BL	C	4	400	4000	black	145	50	50	1	A ⁺ A ⁺⁺ A
96NINA150/GR	C	4	400	4000	grey	145	50	50	1	A ⁺ A ⁺⁺ A

Body: Resin | Lamp holder: R7s | Lamp included

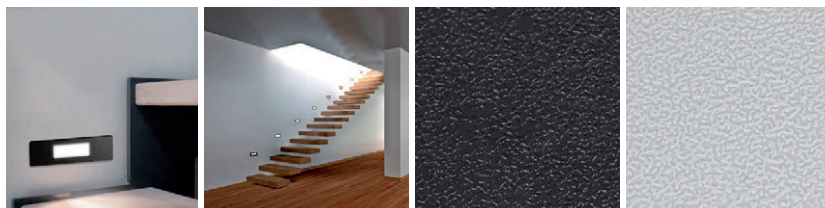

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days..



LETI 100
96LETI100/BL
96LETI100/GR



LETI 100GR
96LETI100GR/BL



LETI 100EL
96LETI100EL/BL
96LETI100EL/GR



IP55

Resin



LETI 100

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96LETI100/BL	C	LETI 100	3	350	4000	Black	134	96	80	1/48	A ⁺ A ⁺⁺ →A
96LETI100/GR	C	LETI 100	3	350	4000	Grey	134	96	80	1/48	A ⁺ A ⁺⁺ →A
96LETI100GR/BL	C	LETI 100GR	3	350	4000	Black	134	96	80	1/48	A ⁺ A ⁺⁺ →A
96LETI100EL/BL	C	LETI 100EL	3	350	4000	Black	134	96	80	1/48	A ⁺ A ⁺⁺ →A
96LETI100EL/GR	C	LETI 100EL	3	350	4000	Grey	134	96	80	1/48	A ⁺ A ⁺⁺ →A

Body: Resin with opal glass | UV resistant | Lamp holder: GX53 | Lamp included




In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days..



LETI 300

96LETI300/BL

96LETI300/GR

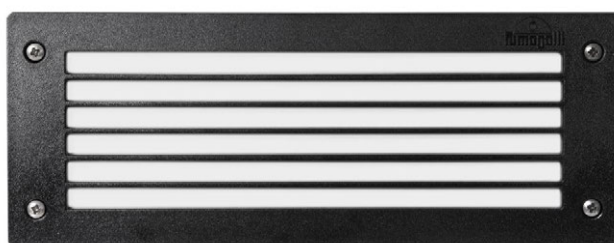

LETI 300GL

96LETI300GL/BL



LETI 300VP

96LETI300VP/BL



IP55

Resin

LETI 300

Catalogue number	Product category	Model	Colour body	Length (mm)	Height (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
96LETI300/BL	C	LETTI 300	Black	293	113	98	1xE27	1/24	A++→E
96LETI300/GR	C	LETTI 300	Grey	293	113	98	1xE27	1/24	A++→E
96LETI300GL/BL	C	LETTI 300GL	Black	293	113	98	1xE27	1/24	A++→E
96LETI300VP/BL	C	LETTI 300VP	Black	113	293	98	1xE27	1/24	A++→E

Body: Resin with opal glass | UV resistant | Lamp not included

3+2
standard
+extendedYEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days..



LED WALL FIXTURE 1.5W
96GRFLED52/DGR



LED WALL FIXTURES 1.8W
96GRFLED02/WH

GRF LED WALL FIXTURES

GARDEN

872



IP65



GRF LED WALL FIXTURES

Catalogue number WHITE	Catalogue number GREY	Catalogue number DARK GREY	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
96GRFLED52/WH	96GRFLED52/GR	96GRFLED52/DGR	C	1.5	60	4000	125	125	20.5	1/40	A++A
96GRFLED02/WH	96GRFLED02/GR	96GRFLED02/DGR	C	1.8	90	4000	230	80	16.5	1/24	A++A

Body material: ABS | Diffuser: PVC | Light source: 2835 SMD

Light source: LED type Ø5mm recessed fixture | Operating temperature: -20°C÷+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LORENZA 150
95LORENZA150/BL



LORENZA 150
95LORENZA150/GR



LORENZA 190
95LORENZA190/BL



LORENZA 190
95LORENZA190/GR



NEUTRAL
WHITE
4000K

IP55


Resin



LORENZA

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95LORENZA150/BL	C	LORENZA 150	4	400	4000	Black	150	150	45	1/24	A ⁺ A ⁺⁺ A
95LORENZA150/GR	C	LORENZA 150	4	400	4000	Grey	150	150	45	1/24	A ⁺ A ⁺⁺ A
95LORENZA190/BL	C	LORENZA 190	8.5	900	4000	Black	190	150	45	1/24	A ⁺ A ⁺⁺ A
95LORENZA190/GR	C	LORENZA 190	8.5	900	4000	Grey	190	150	45	1/24	A ⁺ A ⁺⁺ A

Body material: Resin with clear glass | UV resistant | Lamp holder: R7s | Lamp included

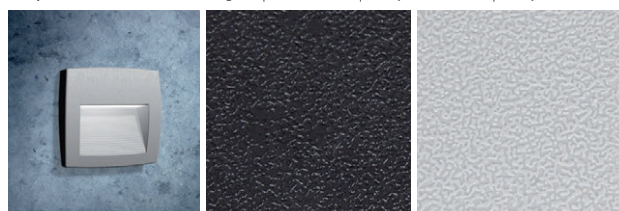

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ABRAM 150
95ABRAM150/BL



ABRAM 150
95ABRAM150/GR



ABRAM 190
95ABRAM190/BL



ABRAM 190
95ABRAM190/GR



NEUTRAL
WHITE
4000K

IP55


Resin



ABRAM

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
95ABRAM150/BL	C	ABRAM 150	4	400	4000	Black	155	60	120	1/30	A ⁺ A ⁺⁺ A
95ABRAM150/GR	C	ABRAM 150	4	400	4000	Grey	155	60	120	1/30	A ⁺ A ⁺⁺ A
95ABRAM190/BL	C	ABRAM 190	8.5	900	4000	Black	195	60	120	1/30	A ⁺ A ⁺⁺ A
95ABRAM190/GR	C	ABRAM 190	8.5	900	4000	Grey	195	60	120	1/30	A ⁺ A ⁺⁺ A

Body material: Resin with clear glass | UV resistant | Lamp holder: R7s | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




GRF
96GRFLED005



GRF
96GRFLED0041
96GRFLED0031



GRF
96GRFLED010



GRF
96GRFLED0091

COOL
WHITE
6400K

IP65



GRF LED RECESSED FIXTURES

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Light angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
96GRFLED0031	C	1,5	55/32	6000-6500	30°	120	53	61	1/50	A++>A
96GRFLED0091	C	1,5	75/42	6000-6500	30°	80	80	61	1/50	A++>A
96GRFLED0041	C	3,5	187/165	6000-6500	30°	205	95	65	1/27	A++>A
96GRFLED005	F	1.5W*	30	6000-6500	110	45	54	1/50	1/27	A++>A
96GRFLED010	F	2W*	35	6000-6500	105	105	57	1/50	1/27	A++>A

Body: Stainless steel +Aluminium | Cable: 3G0.75mm2-10cm | Light source: SMD2835 | LED driver: mounted in the body
Operating temperature: -20°C÷+65°C

*Until Supply Last



Each of the models comes with additional decorative grid, shown in the picture.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF9617 LED
9617LEDW



GRF9617 LED
9619LEDW



GRF9617 LED
9618LEDW



NEUTRAL
WHITE
4000K

IP54

GRF9617 LED

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9617LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++A
9618LEDW	C	3X3W	480	4000-4300	dark grey	44	138	143	1/24	A++A
9619LEDW	C	2X3W	380	4000-4300	dark grey	44	138	143	1/24	A++A



Body: aluminium | Diffuser: tempered glass | LED driver: mounted in the body | Light source: CREE LED
Operating temperature: -20°C÷+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WALL LAMP
95WL001/BL



WALL LAMP
95WL001/WH

IP44



GARDEN WALL LAMP E27

Catalogue number	Product category	Description	Colour	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95WL001/BL	C	Wall lamp	Black	245	180	100	1 x E27	1/10	A ⁺⁺ E
95WL001/WH	C	Wall lamp	White	245	180	100	1 x E27	1/10	A ⁺⁺ E

Voltage: 220-240V AC | Lamps not included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED WALL LIGHT
ROUND IP54
White / Black / Grey



LED WALL LIGHT
SQUARE IP54
White / Black / Grey



LED WALL LIGHT
ROUNDED IP65
White / Black / Grey




IP54

IP65

LED WALL LIGHT

Catalogue number	Product category	Watt (W)	Type	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
969LED100R/WH	C	2X5W	Round	900	4000	white	130	110	100	1/12	A++A
969LED100R/BL	C	2X5W	Round	900	4000	black	130	110	100	1/12	A++A
969LED100R/GR	C	2X5W	Round	900	4000	grey	130	110	100	1/12	A++A
969LED100S/WH	C	2X5W	Square	900	4000	white	100	100	100	1/10	A++A
969LED100S/BL	C	2X5W	Square	900	4000	black	100	100	100	1/10	A++A
969LED100S/GR	C	2X5W	Square	900	4000	grey	100	100	100	1/10	A++A
969LEDW12/WH	C	2X6W	Rounded	1080	4000	white	175	28	90	1/40	A++A
969LEDW12/BL	C	2X6W	Rounded	1080	4000	black	175	28	90	1/40	A++A
969LEDW12/GR	C	2X6W	Rounded	1080	4000	grey	175	28	90	1/40	A++A

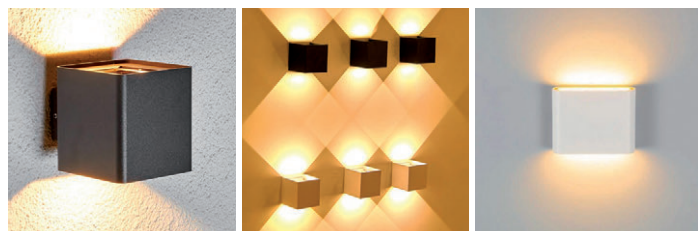

Body material: Aluminium | Diffuser: Glass | Light source 969led100: Epistar LED COB Light source 969LEDW12: Epistar SMD2835



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



TINA IP65

95TINA12/BL



LED WALL FIXTURE 6W IP65

96GRFLED05/GR



FRANCY IP66

95FRANCY/BL

NEUTRAL
WHITE
4000K

IP65

IP66

Resin




FRANCY / GRF LED / TINA

Catalogue number BLACK body	Catalogue number WHITE body	Catalogue number GREY body	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95FRANCY/BL	95FRANCY/WH		C	6	800	4000	300	85	130	1xE27	1/24	A ⁺ A ⁺⁺ A
96GRFLED05/DGR	96GRFLED05/WH	96GRFLED05/GR	C	6	480	4000	220	28	113		1/20	A ⁺⁺ A
95TINA12/BL			C	12	1080	4000	230	72	105		1	A ⁺ A ⁺⁺ A

FANCY, TINA: Body material: Resin | UV resistant

GRF LED: Body material: ABS | Diffuser: PVC | Light source: 2835 SMD

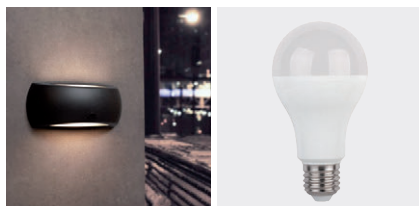

The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED583 LED PEAR A60 8W 2700K | 99LED584 LED PEAR A60 8W 6400K | 99LED794 LED PEAR A60 8W 6400K

99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of FRANCY IP66 the delivery time after order confirmation will be 45 days, and for others products 90 days.



BERTA
95BERTA/BL



STUCCHI
95STUCCHI/BL



LUCIA
95LUCIA/BL



UMBERTA
95UMBERTA/WH

IP66

Resin



BERTA / UMBERTA / LUCIA / STUCCHI

Catalogue number BLACK body	Catalogue number WHITE body	Product category	Description	Length / diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
95BERTA/BL	95BERTA/WH	C	BULKHEAD	275	80	275	1xE27	1/16	A++E
95UMBERTA/BL	95UMBERTA/WH	C	BULKHEAD	350	94	350	2xE27	1/12	A++E
95LUCIA/BL		C	BULKHEAD	300	175	255	1xE27	1/16	A++E
95STUCCHI/BL	95STUCCHI/WH	C	BULKHEAD WITH BACKLIGHT	310	90	338	1xE27+ backlights	1/16	A++E

Body material: Resin | UV resistant | Lamp not included



Recommended bulbs:

99LED583 LED PEAR A60 8W 2700K | 99LED584 LED PEAR A60 8W 6400K | 99LED794 LED PEAR A60 8W 6400K
99LED588 LED PEAR A60 12W 4000K | 99LED587 LED PEAR A60 12W 2700K | 99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LUCIA EL

95LUCIAEL/BL




IP66

Resin

LUCIA EL

Catalogue number	Product category	Colour	Diameter (mm)	Width (mm)	Lampholder	Packing/Box (pcs)	Energy class
95LUCIAEL/BL	C	Black	300	90	1xE27	1/16	A++→E
95LUCIAEL/GR	C	Grey	300	90	1xE27	1/16	A++→E

Body: Resin with opal glass | UV resistant | Lamp not included

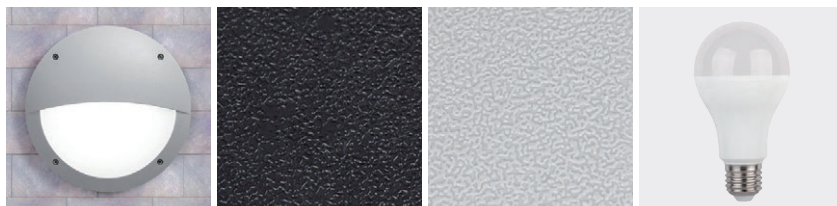

Recommended bulbs:

99LED583 LED PEAR A60 8W 2700K
99LED584 LED PEAR A60 8W 4000K
9LED794 LED PEAR A60 8W 6400K
99LED588 LED PEAR A60 12W 4000K
99LED587 LED PEAR A60 12W 2700K
99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FRANCY OP IP66
95FRANCYOP/WH



BRLED ROUND

95BRLED6WH
95BRLED6BL
95BRLED12WH
95BRLED12BL



BRLED OVAL

95BELED6WH
95BELED6BL
95BELED12WH
95BELED12BL



IP54

IP66



BRLED / FRANCY OP

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRLED6WH	C	6	540	4000	white	54	170	170	100	1/24	A++A
95BRLED6BL	C	6	540	4000	black	54	170	170	100	1/24	A++A
95BRLED12WH	C	12	1080	4000	white	54	220	220	100	1/24	A++A
95BRLED12BL	C	12	1080	4000	black	54	220	220	100	1/24	A++A
95BELED6WH	C	6	540	4000	white	54	187	127	100	1/24	A++A
95BELED6BL	C	6	540	4000	black	54	187	127	100	1/24	A++A
95BELED12WH	C	12	1080	4000	white	54	239	162	100	1/24	A++A
95BELED12BL	C	12	1080	4000	black	54	239	162	100	1/24	A++A
95FRANCYOP/BL	C	empty			black	66	300	85	130	1/24	A++E
95FRANCYOP/WH	C	empty			white	66	300	85	130	1/24	A++E

BRLED: Body: polycarbonate | LED driver: mounted in the body | Light source: EPISTAR

FRANCY OP: Body material: Resin | UV resistant | Lamp not included



Recommended bulbs:

99LED583 LED PEAR A60 8W 2700K
99LED584 LED PEAR A60 8W 4000K
9LED794 LED PEAR A60 8W 6400K
99LED588 LED PEAR A60 12W 4000K
99LED587 LED PEAR A60 12W 2700K
99LED821 LED PEAR A60 12W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BRICE
95BRICE12LED



BRICE
95BRICE24LED



NEUTRAL
WHITE
4000K

IP44



BRICE

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	IP code	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BRICE12LED	C	12	1080	4000	white	44	260	260	90	1/16	A++A
95BRICE24LED	C	24	2160	4000	white	44	380	380	110	1/10	A++A

Body: polycarbonate | LED driver: mounted in the body | Light source: EPISTAR



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LED BULKHEAD LAMP

95BSLED6WH
95BSLED12WH



LED BULKHEAD LAMP

95BLN1540S/WH



LED BULKHEAD LAMP

95BLN1540/WH
95BLN2040/WH



NEUTRAL
WHITE
4000K

IP54


LED BULKHEAD LAMP

Catalogue number	Product category	Watt (W)	Whole fixtures lumens (lm)	Colour temp. (K)	Colour of body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95BSLED6WH	F*	6	540	4500	white	172	71	116	116	A++A
95BSLED12WH	F*	12	1080	4500	white	220	78	143	143	A++A
95BL1540/WH	F*	15	1350	4000	white	190	59.5	190	1/40	A++A
95BL2440/WH	F*	24	2160	4000	white	230	64.5	230	1/20	A++A
95BL1540S/WH	F*	15	1350	4000	white	100	54.5	205	1/40	A++A
95BLN1540/WH	C	15	1350	4000	white	175	52	175	1/40	A++A
95BLN2040/WH	C	20	1800	4000	white	210	52	210	1/20	A++A
95BLN1540S/WH	C	15	1350	4000	white	200	46	98	1/40	A++A

Body: polycarbonate | LED driver: linear | C driver | Light source: 2835SMD | * Until Supply Last



ULTRA THIN

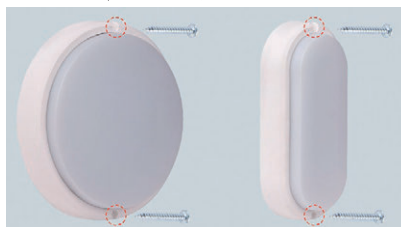


EASY INSTALLATION



BACK HIDDEN CABLE



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

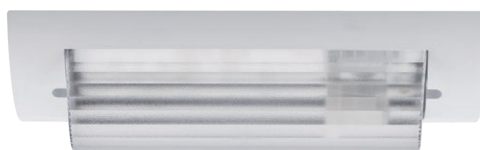

ARIA

91AT5201

91AT5202



LINIA4

91AT6126

91AT6127



LINIA1

91AT6117

91AT6119



SIRIUS

91AT1210

91AT1280

91AT1209

91AT1289



IP54

SIRIUS / ARIA / LINIA


Catalogue number	Product category	Model	Watt (W)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
91AT1210	C	SIRIUS1	MAX 20W	white	230	-	110	1/21	A++C
91AT1280	F	SIRIUS1	MAX 20W	grey*	230	-	110	1/21	A++C
91AT1209	C	SIRIUS2	MAX 20W	white	280	-	115	1/14	A++C
91AT1289	F	SIRIUS2	MAX 20W	grey*	280	-	115	1/14	A++C
91AT5201	C	ARIA	MAX 23W	white	350	120	80	1/12	A++C
91AT5202	F	ARIA	MAX 23W	grey*	350	120	80	1/12	A++C
91AT6117	C	LINIA1	MAX 20W	white	320	137	110	1/26	A++C
91AT6119	F	LINIA1	MAX 20W	grey*	320	137	110	1/26	A++C
91AT6126	C	LINIA4	MAX 20W	white	320	200	110	1/18	A++C
91AT6127	F	LINIA4	MAX 20W	grey*	320	200	110	1/18	A++C

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC)

*Until Supply Last



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 30 days.

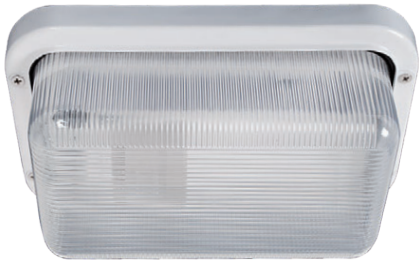

OL4023
914023/W



OL4023
914023/B

IP54



UNTIL SUPPLY
LAST

OL WATERPROOF FIXTURES

Catalogue number	Product category	Model	Watt (W)	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
914023/W	F	OL4023	MAX 20W	white	255	163	90	1/10	A++→C
914023/B	F	OL4023	MAX 20W	black	255	163	90	1/10	A++→C

Body: polycarbonate / metal | Diffuser: polycarbonate / glass





OUTDOOR

FACADE AND GROUND



GRF
96GRF1482

IP65



GRF

Catalogue number	Product category	Width (mm)	Length (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96GRF1482	C	254	498.5	1482.6	1 x E27	1/2	A++ 

Body: aluminium, antique bronze



3+0
standard
+extended

3

YEAR TOTAL
WARRANTY

GRF

887

FACADE AND GROUND



MARTA 90-1
96MARTA901L/BL



MARTA 90-2
96MARTA902L/BL



IP55


Resin



MARTA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96MARTA901L/BL	C	Facade lighting	black	1x3.5	400	4000	92	80	170	1xGU10	1/36	A+ A++A
96MARTA901L/GR	C	Facade lighting	gray	1x3.5	400	4000	92	80	170	1xGU10	1/36	A+ A++A
96MARTA902L/BL	C	Facade lighting	black	2x3.5	800	4000	92	80	170	2xGU10	1/36	A+ A++A
96MARTA902L/GR	C	Facade lighting	gray	2x3.5	800	4000	92	80	170	2xGU10	1/36	A+ A++A

Body material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | 99XLED728 GU10 LED SMD 3.5W 2700K | 99XLED731 GU10 LED SMD 3.5W 6400K

99LED729 GU10 LED SMD 6.5W 4000K | 99LED730 GU10 LED SMD 6.5W 2700K | 99LED796 GU10 LED SMD 6.5W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



FRANCA 90
96FRANCA90/GR



FRANCA 90-1
96FRANCA901L/BL



FRANCA 90-2
96FRANCA902L/GR



LED

IP55

Resin

FRANCA

Catalogue number	Product category	Description	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96FRANCA90/BL	C	Ceiling fixtures	black	3.5	400	4000	95		115	1xGU10	1/30	A ⁺ A ⁺⁺ A
96FRANCA90/GR	C	Ceiling fixtures	gray	3.5	400	4000	95		115	1xGU10	1/30	A ⁺ A ⁺⁺ A
96FRANCA901L/BL	C	Facade lighting	black	3.5	400	4000	95	110	128	1xGU10	1/30	A ⁺ A ⁺⁺ A
96FRANCA901L/GR	C	Facade lighting	gray	3.5	400	4000	95	110	128	1xGU10	1/30	A ⁺ A ⁺⁺ A
96FRANCA902L/BL	C	Facade lighting	black	2x3.5	800	4000	95	110	240	2xGU10	1/20	A ⁺ A ⁺⁺ A
96FRANCA902L/GR	C	Facade lighting	gray	2x3.5	800	4000	95	110	240	2xGU10	1/20	A ⁺ A ⁺⁺ A

Body material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99XLED727 GU10 LED SMD 3.5W 4000K | 99XLED728 GU10 LED SMD 3.5W 2700K | 99XLED731 GU10 LED SMD 3.5W 6400K

99LED729 GU10 LED SMD 6.5W 4000K | 99LED730 GU10 LED SMD 6.5W 2700K | 99LED796 GU10 LED SMD 6.5W 6400K



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



LIVIA 160
95LIVIA160/BL



LIVIA 160
95LIVIA160/GR



LIVIA 160
95LIVIA160/WH



NEUTRAL
WHITE
4000K

IP55

Resin

LIVIA 160

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
95LIVIA160/BL	C	10	1200	4000	Black	160	100	1/18	A ⁺ A ⁺⁺ →A
95LIVIA160/GR	C	10	1200	4000	Grey	160	100	1/18	A ⁺ A ⁺⁺ →A
95LIVIA160/WH	C	10	1200	4000	White	160	100	1/18	A ⁺ A ⁺⁺ →A

Body: Resin with frosted glass | UV resistant | Lamp holder: GX53 | Lamp included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.



OL9612-W1 LED
9612LEDW1



OL9611-W1 LED
9611LEDW1



OL9612-W2 LED
9612LEDW2



OL9611-W2 LED
9611LEDW2


NEUTRAL
WHITE
4000K

IP54



OL9611 / OL9612

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9611LEDW1	C	3	210	4000-4300	dark grey	153	72.6	106.4	1/16	A++A
9611LEDW2	C	2X3W	320	4000-4300	dark grey	231.6	72.6	106.4	1/16	A++A
9612LEDW1	C	3	210	4000-4300	dark grey	170	92	65	1/12	A++A
9612LEDW2	C	2X3W	320	4000-4300	dark grey	200	92	65	1/12	A++A



Body: aluminium | Diffuser: tempered glass | LED driver: mounted in the body | Light source: CREE LED
Operating temperature: -20°C/+65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF98C/AB



GRF
96GRF76-1/AB

GRF98 / GRF76

892

FACADE AND GROUND

IP65



UNTIL SUPPLY
LAST

GRF98 / GRF76


Catalogue number	Product category	Description	Voltage (V)	Colour	Width/Diameter (mm)	Length (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF98C/AB	F	Facade lighting	12	Antique bronze	98	-	41	1 x G4	Brass	1/24	A++E
96GRF76-1/AB	F	Facade lighting	220-240	Antique bronze	76	60	76	1 x GU10	Brass	1/18	A++E

Lamps not included





98LINEAR12

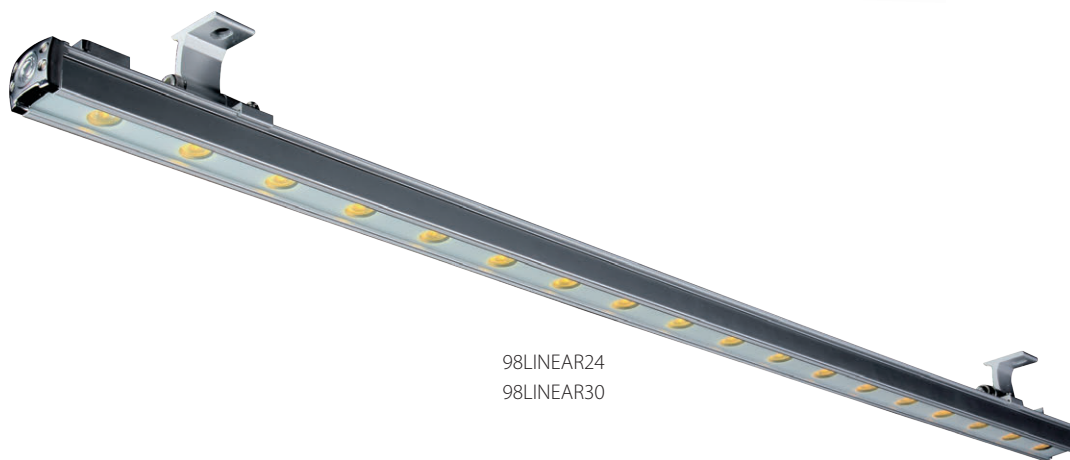98LINEAR24
98LINEAR30

IP67

UNTIL SUPPLY
LAST

LINEAR

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98LINEAR12	F	LINEAR12	12	1080	4000		500	25	33	1/20	A++>A
98LINEAR24	F	LINEAR24	24	2160	4000		1000	25	33	1/15	A++>A
98LINEAR30	F	LINEAR30	30	2700	4000		1000	30	48	1/15	A++>A

Body: aluminium casting | Light source: SMD2835 | Input voltage: LinearRGB DC24V; Linear 4000K: 220-240V | Rubber cable 300mm

3+2
standard
+extended5 YEAR TOTAL
WARRANTY



98STREAM9
98STREAM9RGB

98STREAM36
98STREAM36RGB

STREAM STELLAR

894

FACADE AND GROUND



STREAM STELLAR

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREAM9	C	STREAM9	9	720	5500	grey	300	50	56	1/9	A++A
98STREAM18	C	STREAM18	18	1440	5500	grey	600	50	56	1/9	A++A
98STREAM36	C	STREAM36	36	2880	5500	grey	1000	50	56	1/9	A++A
98STREAM9RGB	C	STREAM9 RGB	9	-	RGB	grey	300	50	56	1/9	A++A
98STREAM18RGB	C	STREAM18 RGB	18	-	RGB	grey	500	55	60	1/9	A++A
98STREAM36RGB	C	STREAM36 RGB	36	-	RGB	grey	1000	50	56	1/9	A++A

Body: aluminium casting | LED driver: mounted in the body | Light source: Epistar | Ambient Temperature: -25°C ÷ +55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED WALL LIGHTS
WITH SENSOR

98SOL200



SOLAR LED WALL LIGHTS
WITH SENSOR

98SOL201



IP54

Solar




SOLAR LED WALL LIGHTS WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixtures lumens (lm)	Solar panel (Wp)	Sensor range (m)	Colour of body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL200	C	14 (FRONT 14+BACK 2PCS)	7	200	0.7- POLY CRISTALLINE	6	white	144.5	96	79	1	A++A
98SOL201	C	17 (FRONT 16+BACK 1PCS)	10	240	0.7- POLY CRISTALLINE	6	white	200	105	90	1	A++A

Material: ABS + PC, anti UV and glossy | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | **Detection angle:** 120° | **Installation height:** ≤ 4meters | **Battery:** 3.7V/ 1200mAh

98SOL200 Auto on at night; Full brightness by motion activated. Weak brightness when no motion | **Time delay:** 10 sek | **Modes:** A- Full brightness+Weak brightness (front and back lights ON); B- Full brightness+Weak brightness (front light OFF; back lights ON) | Auto on at night; Full brightness

98SOL201 Auto on at night; Full brightness by motion activated. Weak brightness when no motion | **Time delay:** 10 sek | **Battery >30%:** Full brightness+Weak brightness (front and back lights ON); **Battery <30%:** Full brightness+Weak brightness (front light OFF; back lights ON) | Auto on at night; Full brightness



98SOL200



98SOL201



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR FIXTURE SOL WITH SENSOR
98SOL300



SOLAR FIXTURE SOL WITH SENSOR
98SOL302



SOLAR FIXTURE SOL WITH SENSOR
98SOL301

LED **IP65** **Solar**



SOLAR LED FLOOD LIGHT WITH SENSOR

Catalogue number	Product category	LED QTY	Power (W)	Whole fixture lumens (lm)	Battery (V/mAh)	Sensor range (m)	Colour body	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL300	C	30	30	500	3.7V/ 2X1500mAh	6	black	217.4	149.3	33.7	1	A++A
98SOL301	C	72	50	1080	3.7V/7200mAh	6	black	300	215	35	1	A++A
98SOL302	C	55	50	1100	3.7V/ 7200mAh	6	black	-	165	35	1	A++A

Material: ABS + PC, anti UV and glossy | 3working mode | 98SOL302: Portable solar panel.Can use as portable power bank



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR FIXTURE SOL WITH SENSOR

98SOL36



SOLAR FIXTURE SOL WITH SENSOR

98SOL20



SOLAR FIXTURE SOL WITH SENSOR

98SOL45



IP44


IP64

Solar




SOLAR FIXTURE SOL WITH SENSOR

Catalogue number	Product category	LED QTY	Whole fixture lumens (lm)	Solar panel (V/mA)	Battery (V/mAh)	Sensor range (m)	Colour body	IP Rating	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL20	C	20	150	4.5V 90mA	3.7V 1200mAh	3-5	black	44	110	150	47	1/60	A++A
98SOL36	C	36	400	5.5V 450mA	3.7V 2200mAh	3-6	black	64	190	110	30	1/40	A++A
98SOL45	C	45	250	5.5V 160mA	3.7V 2200mAh	6-8	black	64	190	183	53	1/60	A++A



98SOL36



98SOL36

Body: ABS | Charging time: 8 hours | Working time: 2000 times



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF190A/AB



GRF
96GRF190B/AB

GRF

898

FACADE AND GROUND



UNTIL SUPPLY
LAST

IP68

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF190A/AB	F	Ground recessed fixtures	Antique bronze	98	190	1 x GU5.3	Composite material	1/12	A++E
96GRF190B/AB	F	Ground recessed fixtures	Antique bronze	98	190	1 x GU5.3	Composite material	1/12	A++E

Lamps not included. The fixtures are with 6m cable.

12V

50/60 Hz

3+0
standard
+extended

3
YEAR TOTAL
WARRANTY



UNDERWATER LED
98LED012SW



UNDERWATER LED
98LED007SW




UNDERWATER LED
98LED003SW



IP68

UNDERWATER LED LIGHTS, IP68

Catalogue number	Product category	Voltage (V)	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Packing/Box (pcs)	Energy class
98LED003SW	C	12V AC	3 X 1	150	4000	silver	1/30	A++A
98LED007SW	C	12V AC	7 X 1	350	4000	silver	1/1	A++A
98LED012SW	C	24V AC	12 X 1	600	4000	silver	1/1	A++A
98LED006RGB	C	12V AC	6 X 1	-	RGB	silver	1/1	A++A

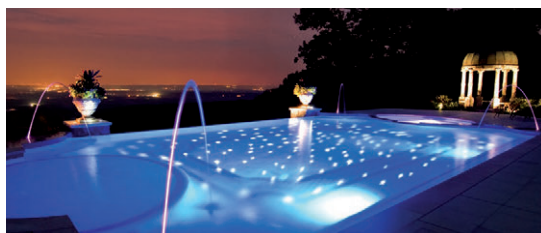

Body: Stainless steel | Light source: Epistar | Beam angle: 90° | without driver



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINI TOMMY ELSP
96TOMMYELSP/BL



MINI TOMMY EL
96TOMMYEL/BL



IP66 Resin

MINI TOMMY EL / MINI TOMMY ELSP

Catalogue number	Product category	Description	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour	Diameter (mm)	Width (mm)	Height (mm)	Lampholder	Packing/Box (pcs)	Energy class
96TOMMYEL/BL	C	GROUND/WALL FIXTURE	3.5	400	4000	black	122	118	127	1xGU10	1/30	A++A
96TOMMYEL/GR	C	GROUND/WALL FIXTURE	3.5	400	4000	gray	122	118	127	1xGU10	1/30	A++A
96TOMMYELSP/BL	C	SPIKE GROUND FIXTURE	3.5	400	4000	black	122	118	310	1xGU10	1/30	A++A
96TOMMYELSP/GR	C	SPIKE GROUND FIXTURE	3.5	400	4000	gray	122	118	310	1xGU10	1/30	A++A

Body material: Resin | UV resistant | Lamp not included | Fully adjustable position | Lamp holder: GU10



The product is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | 99LED730 GU 10 LED SMD 6.5W 2700K | 99LED796 GU 10 LED SMD 6.5W 6400K
99LED733 GU 10 LED SMD RED | 99LED734 GU 10 LED SMD BLUE | 99LED735 GU 10 LED SMD GREEN



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 45 days.

GRF 9615 LED
9615LEDPGRF 9616 LED
9616LEDWGRF 9617 LED
9617LEDPNEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP65

GRF 9615 / 9616 / 9617

Catalogue number	Product category	Watt (W)	Body	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9615LEDP	C	3	aluminium	210	4000-4300	dark grey	279	73	112	1/16	A++A
9616LEDW	C	3	aluminium	210	4000-4300	dark grey		73	110	1/16	A++A
9617LEDP	C	5	PP+PC	360	5500-6000	dark grey	265	25	130	1/16	A++A

Diffuser: tempered glass | LED driver: mounted in the body | Operating temperature: -20°C~+65°C



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection (UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



GRF
96GRF187/CU



GRF
96GRF457LSP/AB



GRF
96GRF76B/AB



GRF
96GRF70B/AB



UNTIL SUPPLY
LAST

IP65

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF187/CU	F	Ground recessed fixtures	Copper	54	187	1 x GU10	Copper	1/12	A++ E



UNTIL SUPPLY
LAST

GRF

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Material	Packing/Box (pcs)
96GRF70B/AB	F	Connector for wall recessed fixtures	Antique bronze	70	28	Brass	1/50
96GRF76B/AB	F	connector for pole D50-70 mm	Antique bronze	76	73	Brass	1/60
96GRF457LSP/AB	F	riser type for ground recessed fixtures	Antique bronze	25	457	Brass	1/30



SOLAR TORCH LIGHT



98SOL96



SOLAR TORCH LIGHT

Catalogue number	Product category	LED qty	Power (W)	Colour temp. (K)	Whole fixture lumens (lm)	Solar panel (V/mA)	Battery (V/mAh)	Colour body	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
98SOL96	C	51	max 1W	1500-1800	20	5.5V/0.66W	3.7V/1200mAh	black	120	770	1/10	A++A

Material: ABS+PC | Charge time (h): 8h | Working Time: 8h | Light source: 2835 | Mode: Dark On>Off | Beam angle: 360° | Battery: Included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL5420



SOLAR GROUND LIGHT
98SOL5520



SOLAR GROUND LIGHT
98SOL9620



SOLAR GROUND LIGHT
98SOL23310



IP44

Solar



SOLAR GROUND LIGHT

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL5420	C	0,06	1	amorphous	Ni-Mh/100mAh AA 1.2V	8h	plastic	black	370	75/75	1/12	A++A
98SOL5520	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	365	85/85	9/8	A++A
98SOL9620	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	plastic	black	380	64	1/24	A++A
98SOL23310	C	0.08	2	amorphous	Ni-Mh AAA 2V	8h	plastic	black	373	57/57	1/24	A++A



1+0
standard
+extended



YEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT

98SOL4320



SOLAR GROUND LIGHT

98SOL8120



SOLAR GROUND LIGHT

98SOL5821



IP44

Solar



SOLAR GROUND LIGHT


Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL4320	C	0,5	15	polycrystal	NI-MH AA 300mAh 1.2V	8h	plastic	black	425	130/110	1/12	A++A
98SOL8120	C	0,06	1	amorphous	Ni-Mh/40mAh button battery 1.2V	8h	plastic	black	340	100	1/16	A++A
98SOL5821	C	0,24	4	amorphous	Ni-Mh/200mAh AA 1.2V	8h	plastic	silver	510	200	1/8	A++A



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR GROUND LIGHT
98SOL9621



SOLAR GROUND LIGHT
98SOL3122



SOLAR GROUND LIGHT
98SOL6721



SOLAR GROUND LIGHT
98SOL6921

LED **IP44** **Solar**



SOLAR GROUND LIGHT


Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Diameter (mm)	Packing/Box (pcs)	Energy class
98SOL9621	C	0,5	6	amorphous	Ni-Mh/300mAh AA 1.2V	8h	stainless steel+glass	silver	430	140	1/12	A++A
98SOL3122	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel+plastic	brass	390	85	4/12	A++A
98SOL6721	C	0,06	1	amorphous	Ni-Mh/200mAh AA 1.2V	8h	stainless steel+plastic	silver	370	128	1/6	A++A
98SOL6921	C	0,06	1	amorphous	Ni-Mh/100mAh AAA 1.2V	8h	stainless steel + plastic	black	355	72	1/12	A++A

RoHS **CE** **1+0** standard +extended **1** YEAR TOTAL WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR WALL
98SOL23423

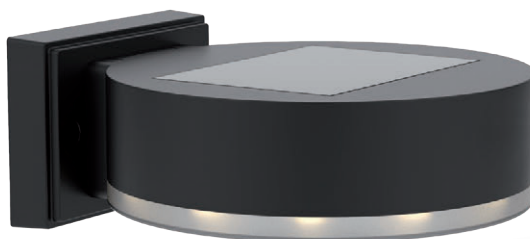

SOLAR WALL
98SOL23428



DRIVEWAY LIGHTS
98SOL41029




IP44

Solar



SOLAR WALL & DRIVEWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL23423	C	0,8	30	mono	LiFePO4/800mAh 18500 4.5V	8h	plastic	black	100	100	100	1/24	A++A
98SOL23428	C	0,3	10	mono	Ni-Mh/ 900mAh 2V	8h	plastic	black	145	145	55	1/24	A++A
98SOL41029	C	0,24	6	poly	Ni-Mh/ 600mAh	8h	aluminium	grey	69	26	100	1/24	A++A

2+0
standard
+extendedYEAR TOTAL
WARRANTY

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR WALL
98SOL11128W



PATHWAY LIGHTS
98SOL11128



IP44

Solar



SOLAR WALL & PATHWAY LIGHTS

Catalogue number	Product category	Power (W)	Whole fixture lumens (lm)	Solar panel	Battery (V/mAh)	Working time	Material	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SOL11128	C	0,32	10	mono	Ni-Mh AA battery	8h	metal & glass	black	127	127	456	1/24	A++→A
98SOL11128W	C	0,32	10	mono	Ni-Mh AA battery	8h	metal & glass	black	108	108	203	1/24	A++→A



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ALDO
96ALDO/BL



ALDO 2L
96ALDO2L/GR



ALDO

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter 1 (mm)	Beam angle	Packing/Box (pcs)	Energy class
96ALDO/BL	C	ALDO	1.7	170	4000	Black	50	47	110	1/50	A++A
96ALDO/GR	C	ALDO	1.7	170	4000	Grey	50	47	110	1/50	A++A
96ALDO2L/BL	C	ALDO 2L	1.7	170	4000	Black	50	47	110	1/50	A++A
96ALDO2L/GR	C	ALDO 2L	1.7	170	4000	Grey	50	47	110	1/50	A++A

Body: Resin with opal glass | UV resistant | Lamp holder: G9 | Lamp included



The product ALDO is accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED933 G9 LED 7W 3000K | 99LED933W G9 LED 7W 4000K | 99LED933CW G9 LED 7W 6400K



In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.




CECI 90 3L
96CECI3L/BL



CECI 90
96CECI90/GR



GRF
96GRFLED068



IP67



GRF067 / CECI RESIN

Catalogue number	Product category	Model	Colour	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Diameter (mm)	Height (mm)	Beam angle	Packing/Box (pcs)	Energy class
96CECI90/BL	C	CECI 90	Black	3.5	400	4000	95	115	45°	1/40	A++→A
96CECI90/GR	C	CECI 90	Gray	3.5	400	4000	95	115	45°	1/40	A++→A
96CECI3L/BL	C	CECI 90 3L	Black	3.5	400	4000	95	115	45°	1/40	A++→A
96CECI3L/GR	C	CECI 90 3L	Gray	3.5	400	4000	95	115	45°	1/40	A++→A
96GRFLED068	C	GRF	Gray	1	60	6000-6500	100	61	45°	1/40	A++→A

GRF067: Material: 304 Stainless steel | Voltage: 100-240V | LED source: Integrated SMD Epistar | IK10 | Corrosion proof

CECI: Material: Resin | UV resistant | Lamp included | Lamp holder: GU10



The product CECI 90 and CECI 90 3L are accomplished with a LED bulb which parameters are noted in the chart. If you need any other color temperature or power, we suggest you to purchase the variants compatible to this fixtures separately as follows:

99LED729 GU 10 LED SMD 6.5W 4000K | 99LED730 GU 10 LED SMD 6.5W 2700K | 99LED796 GU 10 LED SMD 6.5W 6400K

99LED733 GU 10 LED SMD RED | 99LED734 GU 10 LED SMD BLUE | 99LED735 GU 10 LED SMD GREEN



In case of insufficient quantity in stock of 96GRFLED068 the delivery time after order confirmation will be 90 days, and for others products 45 days.



GRF109 IP67



GRF 102 IP67

96GRF102/AB

IP67

UNTIL SUPPLY
LAST

EMPTY FIXTURE GRF, IP67

Catalogue number	Product category	Description	Colour	Width/Diameter (mm)	Height (mm)	Lampholder	Material	Packing/Box (pcs)	Energy class
96GRF102/AB	F	Ground recessed fixtures	Antique bronze	102	137	1 x GU5.3	Casting brass flat over and composite material body with PVC embedded part	1/18	A++E

Load capacity is 3 ton



EMPTY FIXTURE GRF, IP67

911

IP67

UNTIL SUPPLY
LAST

EMPTY FIXTURE GRF 109, IP67

Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp	Colour	Current (A)	Balast	Diameter (mm)	Length (mm)	Height (mm)	Energy class
96GRF109/70	F		230	MHL	satin nickel		empty	260	280	185	A++E
96GRF109/150	F		230	MHL	satin nickel		empty	260	280	185	A++E

Body: PVC | Diffuser: aluminium ring and tempered glass | Lamp not included

Load capacity is 3 ton. | w/o driver



FACADE AND GROUND



GRF105 IP65
96GRF105



GRF106 IP65
96GRF106

EMPTY FIXTURE GRF, IP65

FACADE AND GROUND

IP65

EMPTY FIXTURE GRF, IP65



Catalogue number	Product category	Watt (W)	Voltage (V)	Lamp holder	Colour	Diameter (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96GRF105	F	max.50W	12	1 x GU5.3	satın nickel	107	145	1/20	A++A
96GRF106	F	max.50W	220	1 x GU10	satın nickel	107	145	1/20	A++A

Body: PVC | Diffuser: aluminium ring and tempered glass | Lamp not included
Load capacity is 3 ton. | w/o driver



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RAY
96RAY40



RAY
96RAY30



RAY
96RAY20



RAY
96RAY10



IP67



RAY

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour aluminium ring	Diameter (mm)	Diameter 1 (mm)	Length (mm)	Packing/Box (pcs)	Energy class
96RAY10	C	10	900	5500	satin nickel	160	150	100	1/12	A++A
96RAY20	C	20	1800	5500	satin nickel	180	160	123	1/8	A++A
96RAY30	C	30	2700	5500	satin nickel	230	210	135	1/6	A++A
96RAY40	C	40	3600	5500	satin nickel	230	215	135	1/6	A++A

Body: aluminium | Diffuser: aluminium ring and tempered glass | Load capacity is 2.5 ton | LED driver: mounted in the body
Light source: Epistar LED



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



WADE FIXTURE IP65

WADE FIXTURE IP65

914

LUMINAIRES



WADE FIXTURE IP65

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9WF18CW	C	18	1600	6500	white	700	55	35	1/20	A++A
9WF36CW	C	36	3500	6500	white	1230	55	35	1/12	A++A
9WF45CW	C	45	4300	6500	white	1530	53	35	1/12	A++A

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Clamps: inox | Light source: Sanan 2835 SMD | Power factor: $\lambda > 0.9$ | Starting time: $< 1s$ | Beam angle: 120°

Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA STELLAR SMD2835



BELLA STELLAR SMD2835

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9XBR18LED	-	C	18	1620	4000	Grey	610	75	62	1/8	A++A
9XBR18LEDWCW	-	C	18	1620	6500	Grey	610	75	62	1/8	A++A
9XBR36LED	9XBR36LEDE	C	36	3240	4000	Grey	1210	75	62	1/8	A++A
9XBR36LEDWCW	9XBR36LEDWCWE	C	36	3240	6500	Grey	1210	75	62	1/8	A++A
9XBR54LED	9XBR54LEDE	C	54	4860	4000	Grey	1510	75	62	1/8	A++A
9XBR54LEDWCW	9XBR54LEDWCWE	C	54	4860	6500	Grey	1510	75	62	1/8	A++A



We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime up to three hours.

Body: PC | Diffuser: PC Opal | Clips: polycarbonate | Cable gland, metal clips for wall fixing | Light source: Sanan 2835SMD



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA SMD2835



NEUTRAL
WHITE
4000K

COOL
WHITE
6400K

IP65



BELLA LUMINAIRE SMD2835

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR20LED	-	C	20	1800	4000	grey	600	80	70	1/16	A++A
9BR20LED CW	-	C	20	1800	6500	grey	600	80	70	1/16	A++A
9BR40LED	9BR40LEDE	C	40	4400	4000	grey	1200	80	70	1/12	A++A
9BR40LED CW	9BR40LED CWE	C	40	4400	6500	grey	1200	80	70	1/12	A++A
9BR55LED	9BR55LEDE	C	55	5000	4000	grey	1476	80	70	1/9	A++A
9BR55LED CW	9BR55LED CWE	C	55	5000	6500	grey	1476	80	70	1/9	A++A



Fixed block and battery with a possibility for work in an emergency regime up to three hours. for 9BR40LEDE, 9BR40LED CWE, 9BR55LEDE and 9BR55LED CWE.


Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Light source: Epistar | Clips: INOX
Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA with LED Tubes T8 STELLAR




IP65



BELLA with LED Tubes T8 STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BR109LEDCW	C	1X9	585	6200-6500	grey	655	68	58	1/8	A ⁺ A ⁺⁺ A
9BR109LED	C	1X9	585	4000-4300	grey	655	68	58	1/8	A ⁺ A ⁺⁺ A
9BR209LEDCW	C	2X9	1170	6200-6500	grey	655	113	58	1/6	A ⁺ A ⁺⁺ A
9BR209LED	C	2X9	1170	4000-4300	grey	655	113	58	1/6	A ⁺ A ⁺⁺ A
9BR118LEDCW	C	1X18	1170	6200-6500	grey	1270	68	58	1/8	A ⁺ A ⁺⁺ A
9BR118LED	C	1X18	1170	4000-4300	grey	1270	68	58	1/8	A ⁺ A ⁺⁺ A
9BR218LEDCW	C	2X18	2340	6200-6500	grey	1270	113	58	1/8	A ⁺ A ⁺⁺ A
9BR218LED	C	2X18	2340	4000-4300	grey	1270	113	58	1/8	A ⁺ A ⁺⁺ A
9BR122LEDCW	C	1X24	1430	6200-6500	grey	1565	68	58	1/8	A ⁺ A ⁺⁺ A
9BR122LED	C	1X24	1430	4000-4300	grey	1565	68	58	1/8	A ⁺ A ⁺⁺ A
9BR222LEDCW	C	2X24	2860	6200-6500	grey	1565	113	58	1/6	A ⁺ A ⁺⁺ A
9BR222LED	C	2X24	2860	4000-4300	grey	1565	113	58	1/6	A ⁺ A ⁺⁺ A

with LED tubes STELLAR

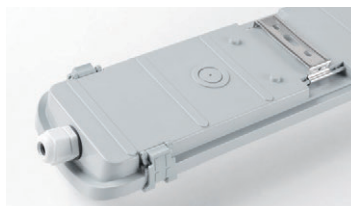

Body: ABC | Diffuser: polycarbonate (PC) | Reflector: without | Clips: polycarbonate | Cable gland, metal clips for wall fixing. | Light source: LED tubes



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



BELLA with LED Tubes T8 ELMARK

Catalogue number	Catalogue number with Emergency kit	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BM110LEDCW	-	C	1X10	800	6500	grey	670	86	100	1/12	A+ A++A
9BM110LED	-	C	1X10	800	4000	grey	670	86	100	1/12	A+ A++A
9BM118LEDCW	-	C	1X18	1440	6500	grey	1270	86	100	1/9	A+ A++A
9BM118LED	-	C	1X18	1440	4000	grey	1270	86	100	1/9	A+ A++A
9BM124LEDCW	-	C	1X24	1920	6500	grey	1570	106	110	1/6	A+ A++A
9BM124LED	-	C	1X24	1920	4000	grey	1570	106	110	1/6	A+ A++A
9BM210LEDCW	-	C	2X10	1600	6500	grey	670	131	100	1/9	A+ A++A
9BM210LED	-	C	2X10	1600	4000	grey	670	131	100	1/9	A+ A++A
9BM218LEDCW	9BM218LEDCWE	C	2X18	2880	6500	grey	1270	131	100	1/6	A+ A++A
9BM218LED	9BM218LEDE	C	2X18	2880	4000	grey	1270	131	100	1/6	A+ A++A
9BM224LEDCW	9BM224LEDCWE	C	2X24	3840	6500	grey	1570	166	110	1/4	A+ A++A
9BM224LED	9BM224LEDE	C	2X24	3840	4000	grey	1570	166	110	1/4	A+ A++A

with LED tubes ELMARK



We offer the fixtures as per personal request with a fixed block and battery with a possibility for work in an emergency regime up to three hours.



Wire and fittings for hanging mounting 2,5m
2 pcs/ pack
92ACC03

Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Ballast: fixed inside the body | Clamps: polycarbonate | Cable gland, metal clips for wall fixing.



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.

NEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP65

UNTIL SUPPLY
LAST

BELLA luminaire with LED tubes T5 ELMARK

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
9BE114LEDW	F	1X10	1000	4000	grey	670	74	80	1/12	A ⁺ A ⁺⁺ A
9BE128LEDW	F	1X20	2000	4000	grey	1210	64	85	1/9	A ⁺ A ⁺⁺ A
9BE214LEDW	F	2X10	2000	4000	grey	670	106	80	1/9	A ⁺ A ⁺⁺ A
9BE114LEDCW	F	1X10	1000	6400	grey	670	74	80	1/12	A ⁺ A ⁺⁺ A
9BE128LEDCW	F	1X20	2000	6400	grey	1210	64	85	1/9	A ⁺ A ⁺⁺ A
9BE214LEDCW	F	2X10	2000	6400	grey	670	106	80	1/9	A ⁺ A ⁺⁺ A

with LED tubes ELMARK



Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Clamps: inox | Cable gland, metal clips for wall fixing.





IP65

EMPTY FIXTURES BELLA FOR SINGLE ENDED LED TUBES T8

Catalogue number	Product category	Led tube size	Colour	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
89084	C	1x600mm	grey	670	86	100	1/12	A++B
89085	C	2x600mm	grey	670	131	100	1/9	A++B
89086	C	1x1200mm	grey	1270	86	100	1/9	A++B
89087	C	2x1200mm	grey	1270	131	100	1/6	A++B
89088	C	1x1500mm	grey	1570	86	100	1/6	A++B
89089	C	2x1500mm	grey	1570	131	100	1/4	A++B



Body: polycarbonate (PC) | Diffuser: polycarbonate (PC) | Reflector: steel white | Clips: polycarbonate | Cable gland, metal clips for wall fixing. | Lamp not included



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



HELIOS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10/WH	C	HELIOS10	10	800	4000	white	105	25	85	1/50	A++A
98HELIOS20/WH	C	HELIOS20	20	1600	4000	white	128	25	88	1/50	A++A
98HELIOS30/WH	C	HELIOS30	30	2400	4000	white	153	25	111	1/30	A++A
98HELIOS50/WH	C	HELIOS50	50	4000	4000	white	205	30	160	1/20	A++A
98HELIOS100/WH	C	HELIOS100	100	8000	4000	white	300	30	205	1/10	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 176 - 264V | Ambient Temperature: -20°C÷ +55°C



Side View



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity:
0.5-4.0mm²

Cat. Number:
31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreens Rating: Sun Protection (UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere (A): ≤30A
Material: flame retardant/Anti UV nylon (PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage (normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




IP65

HELIOS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98HELIOS10	C	HELIOS10	10	800	5000-5500	black	105	25	85	1/40	A++A
98HELIOS20	C	HELIOS20	20	1600	5000-5500	black	128	25	88	1/40	A++A
98HELIOS30	C	HELIOS30	30	2400	5000-5500	black	153	25	111	1/20	A++A
98HELIOS50	C	HELIOS50	50	4000	5000-5500	black	205	30	160	1/20	A++A
98HELIOS100	C	HELIOS100	100	8000	5000-5500	black	300	30	205	1/10	A++A
98HELIOS150	C	HELIOS150	150	10000	5000-5500	black	333	40	254	1/10	A++A
98HELIOS200	C	HELIOS200	200	12000	5000-5500	black	360	42	280	1/10	A++A
98HELIOS20SEN	C	HELIOS20SEN	20	1600	5000-5500	black	134	35	109	1/20	A++A
98HELIOS30SEN	C	HELIOS30SEN	30	2400	5000-5500	black	173	35	136	1/10	A++A
98HELIOS50SEN	C	HELIOS50SEN	50	4000	5000-5500	black	210	35	163	1/10	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 176 - 264V | Ambient Temperature: -20°C ÷ +55°C

Sensor: detection range: 120° | Detection distance: MAX 8 m (±2 m) | Time setting: 140±20 s | Ambient light: 25±10 lux

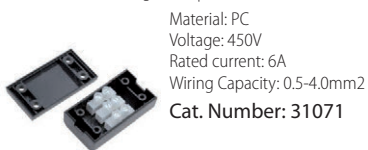

Terminal box IP44



Terminal box IP65



Cable connector IP68



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA10SLIM
98VEGA20SLIM
98VEGA30SLIM
98VEGA50SLIM
98VEGA100SLIM



VEGA SLIM WITH SENSOR

98VEGA10SENSLIM
98VEGA20SENSLIM
98VEGA30SENSLIM
98VEGA50SENSLIM



VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM	C	10	900	5500	black	102	24	83	1/40	A ⁺ A ⁺⁺ A
98VEGA20SLIM	C	20	1800	5500	black	131	26	117	1/40	A ⁺ A ⁺⁺ A
98VEGA30SLIM	C	30	2700	5500	black	215	30	185	1/20	A ⁺ A ⁺⁺ A
98VEGA50SLIM	C	50	4500	5500	black	230	30	195	1/20	A ⁺ A ⁺⁺ A
98VEGA100SLIM	C	100	9000	5500	black	327	42	265	1/10	A ⁺ A ⁺⁺ A
98VEGA10SENSLIM	C	10	900	5500	black	102	50	153	1/50	A ⁺ A ⁺⁺ A
98VEGA20SENSLIM	C	20	1800	5500	black	134	34	98	1/30	A ⁺ A ⁺⁺ A
98VEGA30SENSLIM	C	30	2700	5500	black	215	30	185	1/20	A ⁺ A ⁺⁺ A
98VEGA50SENSLIM	C	50	4500	5500	black	230	30	195	1/10	A ⁺ A ⁺⁺ A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C÷ +65°C

Sensor: | Detection Range: 110° | Detection Distance: MAX 8m(adjustable) | Ambient Light: 2-1000 lux (adjustable) | Detection Motion Speed: 0.6-1.5m/s;



Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA10SLIM/WH
98VEGA20SLIM/WH
98VEGA30SLIM/WH
98VEGA50SLIM/WH
98VEGA100SLIM/WH



VEGA SLIM / VEGA SLIM WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA10SLIM/WH	C	10	900	4000	white	111	25	100	1/40	A ⁺ A ⁺⁺ A
98VEGA20SLIM/WH	C	20	1800	4000	white	131	26	117	1/40	A ⁺ A ⁺⁺ A
98VEGA30SLIM/WH	C	30	2700	4000	white	215	32	185	1/20	A ⁺ A ⁺⁺ A
98VEGA50SLIM/WH	C	50	4500	4000	white	230	30	195	1/20	A ⁺ A ⁺⁺ A
98VEGA100SLIM/WH	C	100	9000	4000	white	327	42	265	1/10	A ⁺ A ⁺⁺ A
98VEGA20SENSLIM/WH	C	20	1800	4000	white	131	26	117	1/30	A ⁺ A ⁺⁺ A
98VEGA30SENSLIM/WH	C	30	2700	4000	white	215	30	185	1/20	A ⁺ A ⁺⁺ A
98VEGA50SENSLIM/WH	C	50	4500	4000	white	230	32	195	1/10	A ⁺ A ⁺⁺ A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C÷ +65°C
Sensor: | Detection Range: 110° | Detection Distance: MAX 8m(adjustable) | Ambient Light: 2-1000 lux (adjustable) | Detection Motion Speed: 0.6-1.5m/s;



Terminal box IP44



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VEGA SLIM

98VEGA150SLIM

98VEGA200SLIM




IP65



VEGA SLIM

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VEGA150SLIM	C	150	15000	5500	black	381	45	302	1/1	A ⁺ A ⁺⁺ A
98VEGA200SLIM	C	200	20000	5500	black	420	45	320	1/1	A ⁺ A ⁺⁺ A

Body: Plastic+Aluminium | LED driver: linear | Light source: SANAN | Input voltage: 220V-240V AC | Cable length: 300 mm | Ambient Temperature: -30°C÷ +65°C

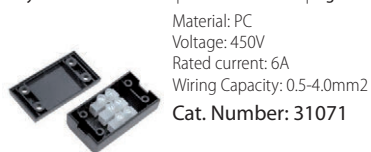

Terminal box IP44



Terminal box IP65



Cable connector IP68



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



LYRA RGB
98LYRA15RGB



LYRA RGB
98LYRA50RGB




LYRA RGB
98LYRA30RGB



LYRA RGB

Catalogue number	Product category	Model	Watt (W)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98LYRA15RGB	C	LYRA15	15	RGB	black	140	195	50	1/20	A++A
98LYRA30RGB	C	LYRA30	30	RGB	black	184	254	57	1/10	A++A
98LYRA50RGB	C	LYRA50	50	RGB	black	233	300	67	1/5	A++A

Body: Aluminium casting | LED driver: mounted in the body | Light source: Epistar SMD2835 | Input voltage: 200-240V | Remote-controlled distance: 6-8M
Ambient Temperature: -30°C÷+55°C | Diffuser: Tempered glass

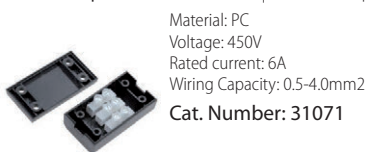

Terminal box IP44



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection(UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon(PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage(normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²

Cat. Number: 31072





In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.




SIRIUS SMD

Catalogue number	Product category	Model	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98SIRIUS50SMD	C	SIRIUS50SMD	50	5000	6500	black	137	35	170	1/10	A++A
98SIRIUS100SMD	C	SIRIUS100SMD	100	10000	5500	black	310	80	430	1/10	A++A
98SIRIUS150SMD	C	SIRIUS150SMD	150	15000	5500	black	310	80	430	1/10	A++A
98SIRIUS200SMD	C	SIRIUS200SMD	200	20000	5500	black	386	106	560	1/10	A++A
98SIRIUS250SMD	C	SIRIUS250SMD	250	25000	5500	black	386	106	560	1/10	A++A
98SIRIUS300SMD	C	SIRIUS300SMD	300	30000	5500	black	386	106	560	1/10	A++A



Body: Aluminium | LED driver: mounted in the body | Light source: 2835SMT Epistar | Input voltage: 100V-240V AC | Ambient Temperature: -30°C÷ +65°C

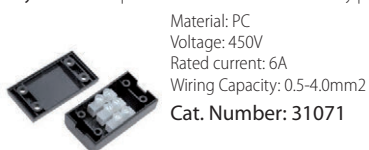

Terminal box IP44

Material: PC
Voltage: 450V
Rated current: 6A
Wiring Capacity: 0.5-4.0mm²
Cat. Number: 31071



Terminal box IP65

Material: Polypropylene 94-V2 grade
Sunscreen Rating: Sun Protection (UV)
Voltage: 450V
Rated current: 10A
Terminal Blocks: 3p screw type
Metal Part: Plated Brass/Steel Spring
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31070



Cable connector IP68

Rated operational voltage: AC250V
Rated operational Ampere(A): ≤30A
Material: flame retardant/Anti UV nylon (PA66)
Crimping terminals: Nickel-plated brass
Withstand voltage (normal temperature): 3KV
Operating temperature range: -40°C~+105°C
Wiring Capacity: 0.5-2.5mm²
Cat. Number: 31072



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX720CW/BL



STADIUM FLOOD LIGHTS PHOENIX
98PHOENIX960CW/BL

STADIUM FLOOD LIGHTS PHOENIX


928

FLOODLIGHTS



STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX720CW/BL	C	720	86400	5500K	30°	833,4	442	201	1/1	A++A
98PHOENIX960CW/BL	C	960	115200	5500K	30°	1090	442	201	1/1	A++A

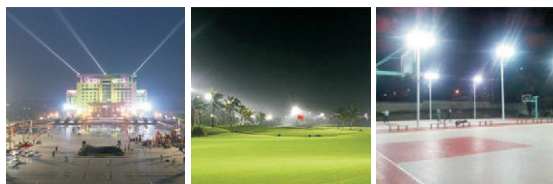

Body: Aluminium | LED driver: MEANWELL | Light source: PHILIPS | Input voltage: 230V AC | Ambient Temperature: -20°C ÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



STADIUM FLOOD LIGHTS PHOENIX

98PHOENIX240CW/BL



STADIUM FLOOD LIGHTS PHOENIX

98PHOENIX480CW/BL



STADIUM FLOOD LIGHTS PHOENIX

98PHOENIX360CW/BL


WARM
WHITE
2700KNEUTRAL
WHITE
4000KCOOL
WHITE
6400K

IP67



STADIUM FLOOD LIGHTS PHOENIX

Catalogue number	Product category	Watt (W)	Lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98PHOENIX240CW/BL	C	240	28800	5500K	30°	435,4	341	190	1/1	A++A
98PHOENIX360CW/BL	C	360	43200	5500K	30°	618,4	341	200	1/1	A++A
98PHOENIX480CW/BL	C	480	57600	5500K	30°	579,4	442	201	1/1	A++A

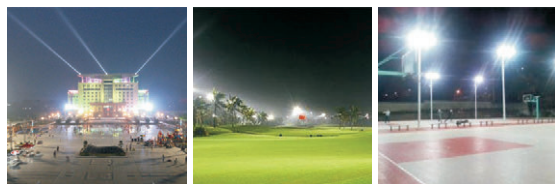

Body: Aluminium | LED driver: MEANWELL | Light source: PHILIPS | Input voltage: 230V AC | Ambient Temperature: -20°C ÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



RECHARGEABLE
WORKLAMP SMD
98FLOOD10



NEUTRAL
WHITE
4000K

IP44



UNTIL SUPPLY
LAST

LED WORKLAMP SMD

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FLOOD10	F	FLOOD10	10	1000	4000	orange	170	41	125	1/20	A++A

98FLOOD10: 5V input & output with 220V adaptor and 1m USB charging cable | Ultra bright led | Materials: ABS | Beam angle: 120° | Battery: 18650 lithium 3.7V 4.4Ah | Run time: 4 hrs in 100% light/ 8hrs in 50% light | Fully charge time: 5-6hrs | Lighting Mode: 100%-50%-SOS-FLASH-OFF



RECHARGEABLE
WORKLAMP SMD
98FLOOD10Y



NEUTRAL
WHITE
4000K

IP44



UNTIL SUPPLY
LAST

RECHARGEABLE WORKLAMP SMD

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FLOOD10Y	F	FLOOD10Y	10	600	4000	yellow	242	25	215	1/10	A++A

Body: Aluminium | Light source: SMD2835 | Input voltage: 100V-240V | All-round rotation 360° | Any angle hover | With adaptor and car charge
Time of battery work: 100% light-2h; 50% light-4h





LED WORK FLOODLIGHTS

98FLOOD30S

98FLOOD50S



IP65

220V



LED WORK FLOODLIGHTS

Catalogue number	Product category	Model	Watt (W)	Whole lamp lumens (lm)	Colour temp. (K)	Beam angle	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98FLOOD30S	C	FLOOD30S	30	2700	5500	110°	163.5	210	30.5	1/20	A++A
98FLOOD50S	C	FLOOD50S	50	4500	5500	110°	171	227	32	1/20	A++A

Material: Aluminium | Color body: Yellow | Working Temperature: -20°C +45°C | Two meters 3*1.0mm² rubber cable with plug

In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ATLAS 45
98ATLAS45/BL1
98ATLAS45/BL2



ATLAS Sim
98ATSIM106
98ATLASSIM/1
98ATLASSIM/2



ATLAS Ring
98ATR107
98ATLASRING/1
98ATLASRING/2




UNTIL SUPPLY
LAST

IP65 **INDUSTRIAL**

ATLAS

Catalogue number	Product category	Watt (W)	Lampholder	Colour	Length1 (mm)	Length2 (mm)	Width (mm)	Width2 (mm)	Height (mm)	Current (A)	Control gear	Packing/Box (pcs)	Energy class
98ATLAS45/BL1	F	70	Rx7s	black	435	350	232	-	85	-	empty fixture	1/4	A++C
98ATLAS45/BL2	F	150	Rx7s	black	435	350	232	-	85	-	empty fixture	1/4	A++C
98ATLAS45/W1	F	70	Rx7s	white	435	350	232	-	85	-	empty fixture	1/4	A++C
98ATSIM106	F	150	Rx7s	black	232	210	280	220	170	1,80	magnetic	1/6	A++C
98ATLASSIM/1	F	70	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++C
98ATLASSIM/2	F	150	Rx7s	black	232	210	280	220	170	-	empty fixture	1/6	A++C
98ATR107	F	70	Rx7s	black	325	280	230	210	93	0,95	magnetic	1/6	A++C
98ATLASRING/1	F	70	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++C
98ATLASRING/2	F	150	Rx7s	black	325	280	230	210	93	-	empty fixture	1/6	A++C

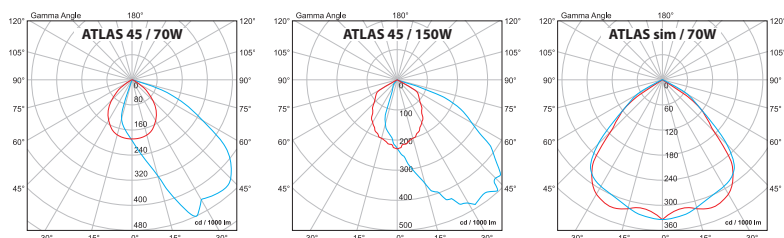

Body: aluminium | Diffuser: tempered glass | Control gear: mounted in the body
Ambient Temperature: -20°C ÷ +65°C





VEGA IP44

989009LED
989012LED
989008LED



VEGA IP65

98VEGA20



VEGA WITH SENSOR IP44

989019LED



IP44

IP65

UNTIL SUPPLY
LAST

VEGA

Catalogue number	Product category	Model	Watt (W)	Lamp	Whole fixture lumens (lm)	Colour temp. (K)	Socket	Colour body	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
989009LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	grey	200	145	120	1/20	A ⁺ A ⁺⁺ A
989012LED	F	VEGA J-118	7.5	LED	700	4000	R7s	grey	260	210	230	1/10	A ⁺ A ⁺⁺ A
989008LED	F	VEGAJ-78	5.5	LED	440	4000	R7s	black	200	145	120	1/20	A ⁺ A ⁺⁺ A
989019LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	white	260	210	230	1/10	A ⁺ A ⁺⁺ A
989020LED	F	VEGA J-118 with sensor	7.5	LED	700	4000	R7s	black	260	210	230	1/10	A ⁺ A ⁺⁺ A
98VEGA20	F	VEGA 20	20	COB	1400	5500	-	grey	140/150	180	100	1/12	A ⁺ A ⁺⁺ A

Body: aluminium casting | Ambient Temperature: -30°C ÷ +65°C | Diffuser: Tempered glass





ROAD LIGHTS





STREET 300 SMD

98STREET300SMD



STREET SMD, LED CHIP SAMSUNG

Catalogue number	Product category	Dimmable	Watt (W)	LED chip lumens (lm)	Colour temp (K)	Beam angle	Colour body	Diameter of the pole (mm)	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98STREET150SMD	C	-	150	18000	5500	85°x135°	Silver aluminium	60	501	290	87	1/1	A++A
98STREET200SMD	C	-	200	24000	5500	85°x135°	Silver aluminium	60	582	290	87	1/1	A++A
98STREET250SMD	C	Yes	250	30000	5500	85°x135°	Silver aluminium	60	662	290	87	1/1	A++A
98STREET300SMD	C	Yes	300	36000	5500	85°x135°	Silver aluminium	60	796	347	142	1/1	A++A



STREET POLE JOINT

Diam.: 60mm

Colour body: grey

Size (mm): Diameter 60 / Width 150 / Height 250

Catalogue number: 98POLE60

Packing (pcs): 1

Body: Silver aluminium | LED driver: mounted in the body | Light source: Samsung 3030SMD | Input voltage: 100V-240V AC | Ambient temperature: -30°C ÷ +65°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



ROUTE SMD STELLAR

98ROUTE30SMD
98ROUTE50SMD
98ROUTE100SMD
98ROUTE150SMD



ROUTE SMD STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98ROUTE30SMD	C	30	3000	5000-5500	85°x140°	130	53	340	1/1	A++>A
98ROUTE50SMD	C	50	5000	5000-5500	85°x140°	155	55	390	1/1	A++>A
98ROUTE100SMD	C	100	10000	5000-5500	85°x140°	160	65	450	1/1	A++>A
98ROUTE150SMD	C	150	15000	5000-5500	85°x140°	170	65	570	1/1	A++>A

Ultra thin design



Body: Aluminium | Cover: PC | Voltage: 100-265 VAC | Light source: Sanan | Ambient temperature: -35°C÷ +45°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



AVENUE 100 SMD
98AVENUE100SMD



AVENUE 50 SMD
98AVENUE50SMD



AVENUE 30 SMD
98AVENUE30SMD

COOL
WHITE
6400K**IP67**

AVENUE SMD, LED CHIP PHILIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Length (mm)	Width (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98AVENUE30SMD	C	30	3000	5500	70°x150°	365	18	90	1/1	A++A
98AVENUE50SMD	C	50	5000	5500	70°x150°	420	15	234	1/1	A++A
98AVENUE100SMD	C	100	10000	5500	80°x150°	605	15	295	1/1	A++A



STREET POLE JOINT

Diam.: 60mm

Colour body: grey

Size (mm): Diameter 60 / Width 150 / Height 250

Catalogue number: 98POLE60

Packing (pcs): 1

Ultra thin design



Body: Aluminium casting | LED driver: mounted in the body | Light source: SMD3030 | Input voltage: 220-240V | Working temperature: -25+55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



SOLAR LED STREET LIGHTS WITH SENSOR

98SOL100
98SOL101
98SOL102



IP65

Solar



SOLAR LED STREET LIGHTS WITH SENSOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Solar panel (Wp)	Battery (V/mAh)	Sensor range (m)	Length (mm)	Height (mm)	Width (mm)	Packing/Box (pcs)	Energy class
98SOL100	C	20	400	6000	2.3	3.7V/2400mAh	2-6	137	224.4	41.5	1/1	A++A
98SOL101	C	40	850	6000	7	3.7V/6000mAh	3-8	193.7	351.4	50.8	1/1	A++A
98SOL102	C	80	1600	6000	9.5	7.4V/5400mAh	3-8	232	413	58	1/1	A++A

Material: ABS + PC, anti UV and glossy, V0 fireproof | **Colour body:** Black | **Detection angle:** 120° | **Beam angle:** 140°x 70° | **Installation height** 98SOL100: 2-4meters, other models: 3-5m | Possibility to mounting on Wall or Lamp-post | **First 5 hours lighting:** Full brightness+ Weak brightness | After 5 hours or battery capacity<30%: Full brightness+ Weak brightness+ OFF | **Solar panels:** Poly-cristalline silicone; Frosted surface- scratch resistant | **LED&Lens:** LM-80 LEDs 2835SMD; high transmittance PC optical lens | **Accessory for wall mounted installation:** included

Accessory for wall mounted installation



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



FESTA SMD STELLAR

98FESTA100SMD


98FESTA150SMD

98FESTA200SMD



FESTA SMD STELLAR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98FESTA100SMD	C	100	10000	5000-5500	120°	black	270	151	1/1	A++A
98FESTA150SMD	C	150	15000	5000-5500	120°	black	320	159	1/1	A++A
98FESTA200SMD	C	200	20000	5000-5500	120°	black	380	166	1/1	A++A



Gear box: Aluminium + Graphene | Cover: PC | Voltage: 180-265 VAC | Light source: Sanan | Ambient temperature: -25°C ÷ +45°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



VECA SMD
98VECA120SMD



VECA SMD
98VECA150SMD



VECA SMD
98VECA200SMD
98VECA250SMD

VECA SMD

HIGH BAYS

940



COOL
WHITE
6400K

IP65



VECA SMD, LED CHIP PHILIPS

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Beam angle	Colour body	Diameter (mm)	Height (mm)	Packing/Box (pcs)	Energy class
98VECA120SMD	C	120	12000	5500	120°	grey	400	120.3	1/1	A++A
98VECA150SMD	C	150	15000	5500	120°	grey	382	60	1/1	A++A
98VECA200SMD	C	200	20000	5500	120°	grey	460	170.3	1/1	A++A
98VECA250SMD	C	250	25000	5500	120°	black	500	180	1/1	A++A

Gear box: Aluminium | LED driver: mounted in the gear box | Light source: Philips | Ambient temperature: -25°C ÷ +55°C



In case of insufficient quantity in stock of any item listed on this page, the delivery time after order confirmation will be 90 days.



MINICOLOR
98MINICOL-BL



MINICOLOR
98MINICOL-WT



MINICOLOR
98MINICOL-GR



MINICOLOR
98MINICOL-R



MINICOLOR
98MINICOL-G



MINICOLOR
98MINICOL-B



COOL
WHITE
6400K


IP20



UNTIL SUPPLY
LAST

MINICOLOR

Catalogue number	Product category	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Diameter (mm)	Diameter1 (mm)	Height (mm)	Height1 (mm)	Packing/Box (pcs)	Energy class
98MINICOL-BL	F	30	2400	5500	black	220	115	280	120	1/1	A++A
98MINICOL-WT	F	30	2400	5500	white	220	115	280	120	1/1	A++A
98MINICOL-GR	F	30	2400	5500	grey	220	115	280	120	1/1	A++A
98MINICOL-R	F	30	2400	5500	red	220	115	280	120	1/1	A++A
98MINICOL-G	F	30	2400	5500	green	220	115	280	120	1/1	A++A
98MINICOL-B	F	30	2400	5500	blue	220	115	280	120	1/1	A++A



Reflector: aluminium | Gear box: aluminium casting | LED driver: mounted in the gear box | Light source: Epistar | Ambient Temperature: - 30°C÷ +65°C

